



US008213547B2

(12) **United States Patent**  
**Sisley et al.**

(10) **Patent No.:** **US 8,213,547 B2**  
(45) **Date of Patent:** **Jul. 3, 2012**

(54) **IDENTIFICATION OF TARGET SIGNALS IN RADIO FREQUENCY PULSED ENVIRONMENTS**

(75) Inventors: **Brandon M. Sisley**, Liberty Township, OH (US); **Brad Prichard**, Bloomington, IN (US); **Douglas N. Morgan**, Bloomington, IN (US); **Craig A. Rouland**, Solsberry, IN (US)

(73) Assignee: **The United States of America as represented by the Secretary of the Navy**, Washington, DC (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 868 days.

(21) Appl. No.: **12/334,112**

(22) Filed: **Dec. 12, 2008**

(65) **Prior Publication Data**

US 2009/0203337 A1 Aug. 13, 2009

**Related U.S. Application Data**

(63) Continuation-in-part of application No. 12/211,483, filed on Sep. 16, 2008, and a continuation of application No. 11/900,141, filed on Aug. 31, 2007.

(51) **Int. Cl.**  
**H03D 3/22** (2006.01)

(52) **U.S. Cl.** ..... **375/329; 375/130; 375/136; 375/279; 375/308**

(58) **Field of Classification Search** ..... **375/330, 375/130, 136, 279, 308, 329**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,597,107 A	6/1986	Ready et al.	
4,876,737 A	10/1989	Woodworth et al.	
6,124,758 A	9/2000	Korte et al.	
6,426,675 B1	7/2002	Salzmann	
7,940,866 B2 *	5/2011	Yuan et al. ....	375/343
8,031,059 B2 *	10/2011	Rollins et al. ....	340/407.1
2005/0265292 A1	12/2005	Atsuta	
2005/0281214 A1	12/2005	Misra et al.	
2006/0063543 A1	3/2006	Matoba et al.	
2006/0238350 A1	10/2006	Tessier	
2007/0192048 A1	8/2007	Hu et al.	
2008/0304602 A1	12/2008	Kim et al.	
2009/0037959 A1	2/2009	Suh et al.	
2009/0046815 A1	2/2009	Oh et al.	
2009/0060044 A1	3/2009	Suh et al.	
2009/0067481 A1 *	3/2009	Sisley et al. ....	375/224
2010/0179761 A1	7/2010	Burtz et al.	
2011/0103463 A1	5/2011	Kim et al.	

\* cited by examiner


Primary Examiner — Dhaval Patel

(74) Attorney, Agent, or Firm — Christopher A. Monsey

(57) **ABSTRACT**

A system and method to detect a signal of interest. In one embodiment, the system comprises a memory including a first parameter value, a second parameter value, a third parameter value and a program to identify active video values and null values in a first plurality of signals including the signal of interest. The system includes an interface portion adapted to receive a second plurality of signals based upon power levels of a first plurality of signals. The signal of interest is detectable based on the first, second and third parameter values.

**24 Claims, 64 Drawing Sheets**

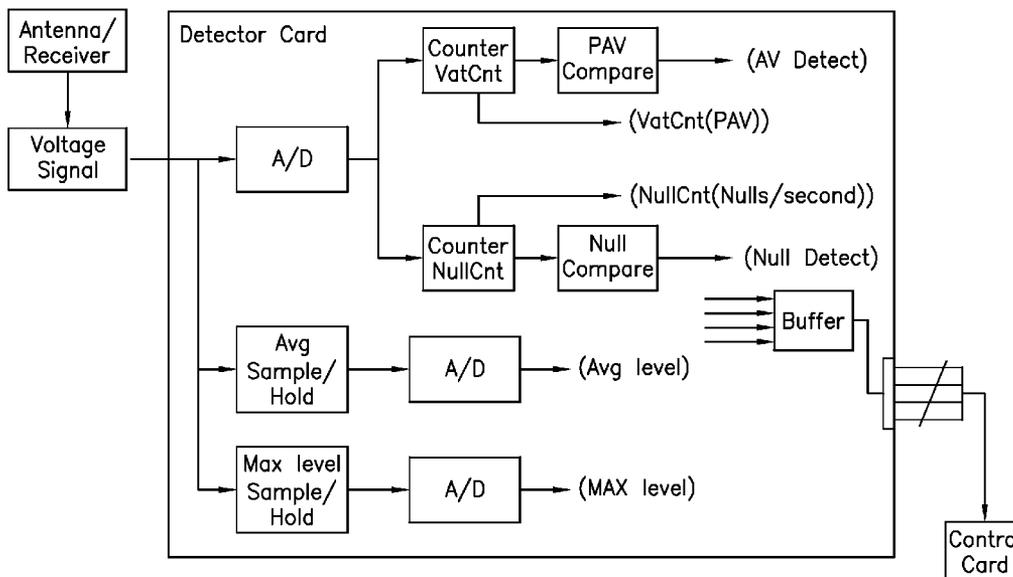



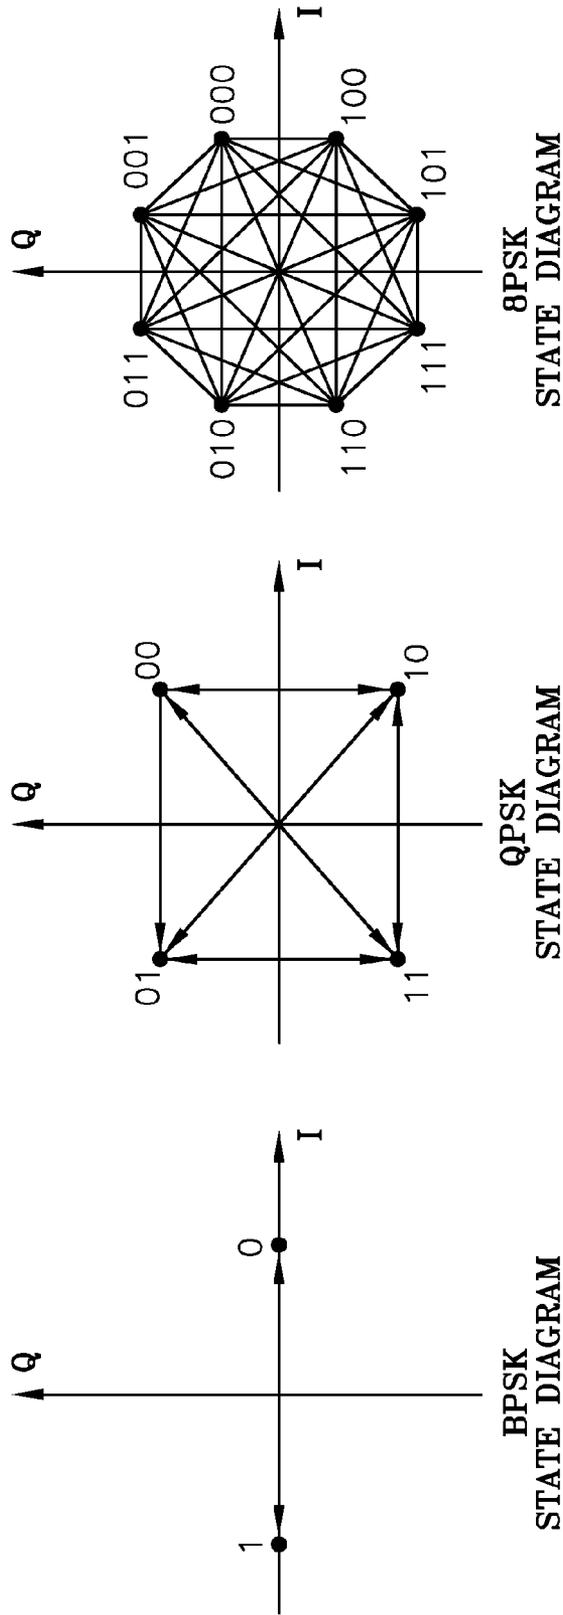


FIG-1

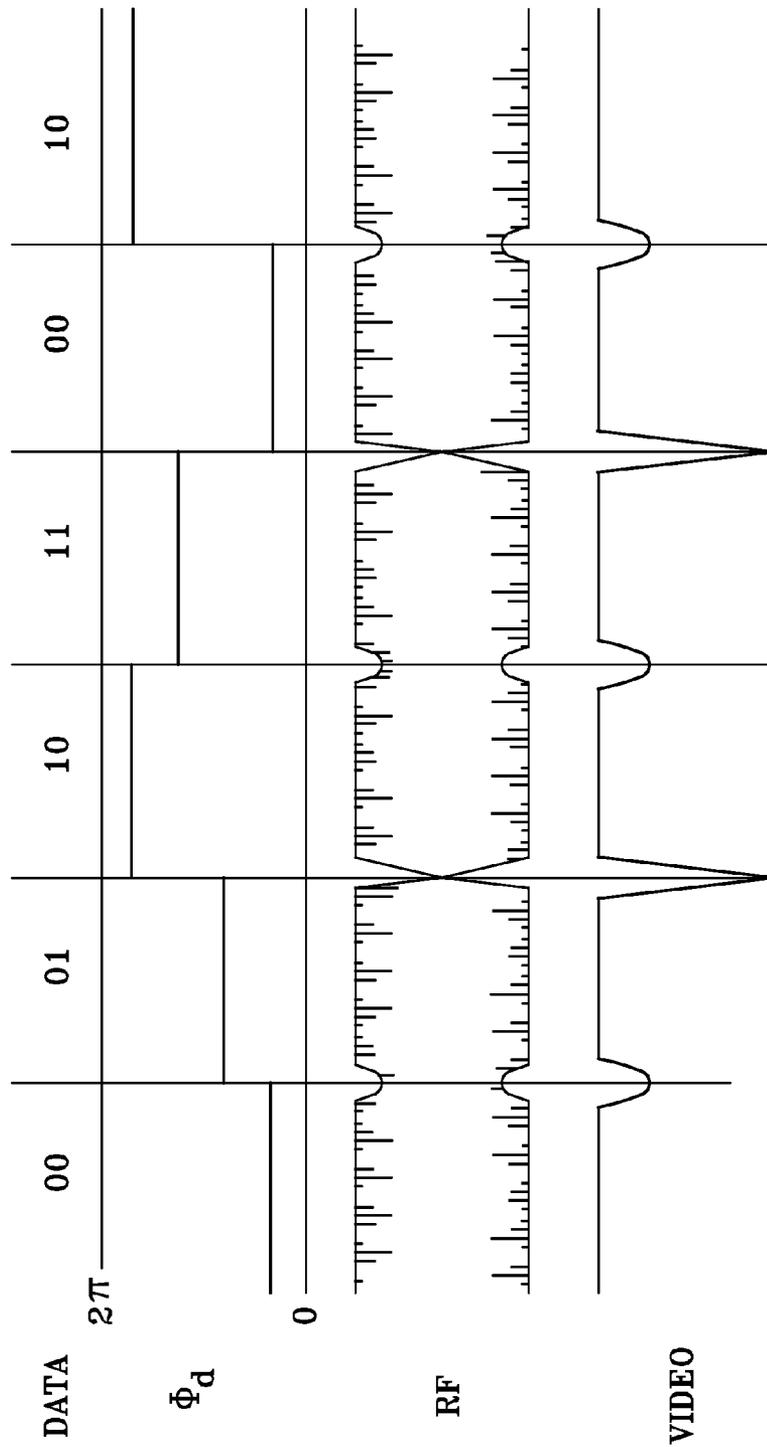


THEORETICAL QPSK MODULATION AND CVR RECEPTION SIGNALS

FIG-2

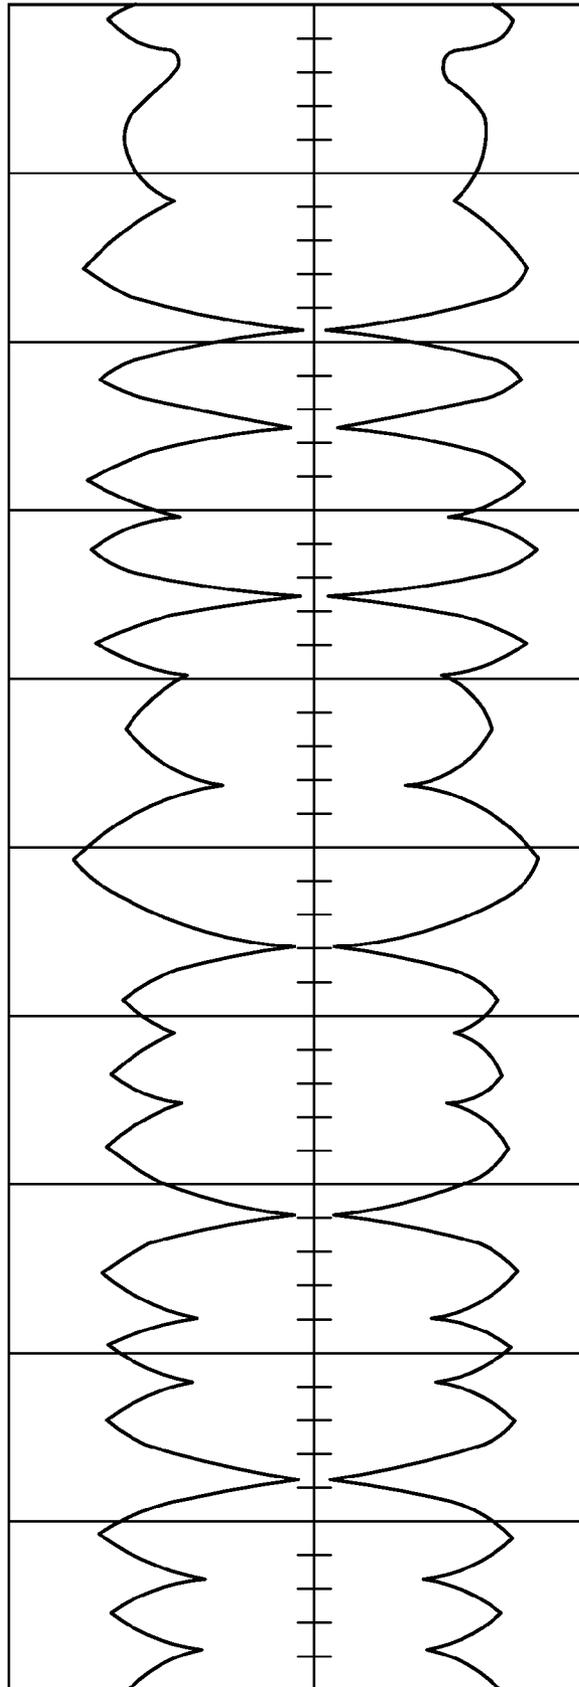



ACTUAL PSK RF SIGNAL

FIG-3

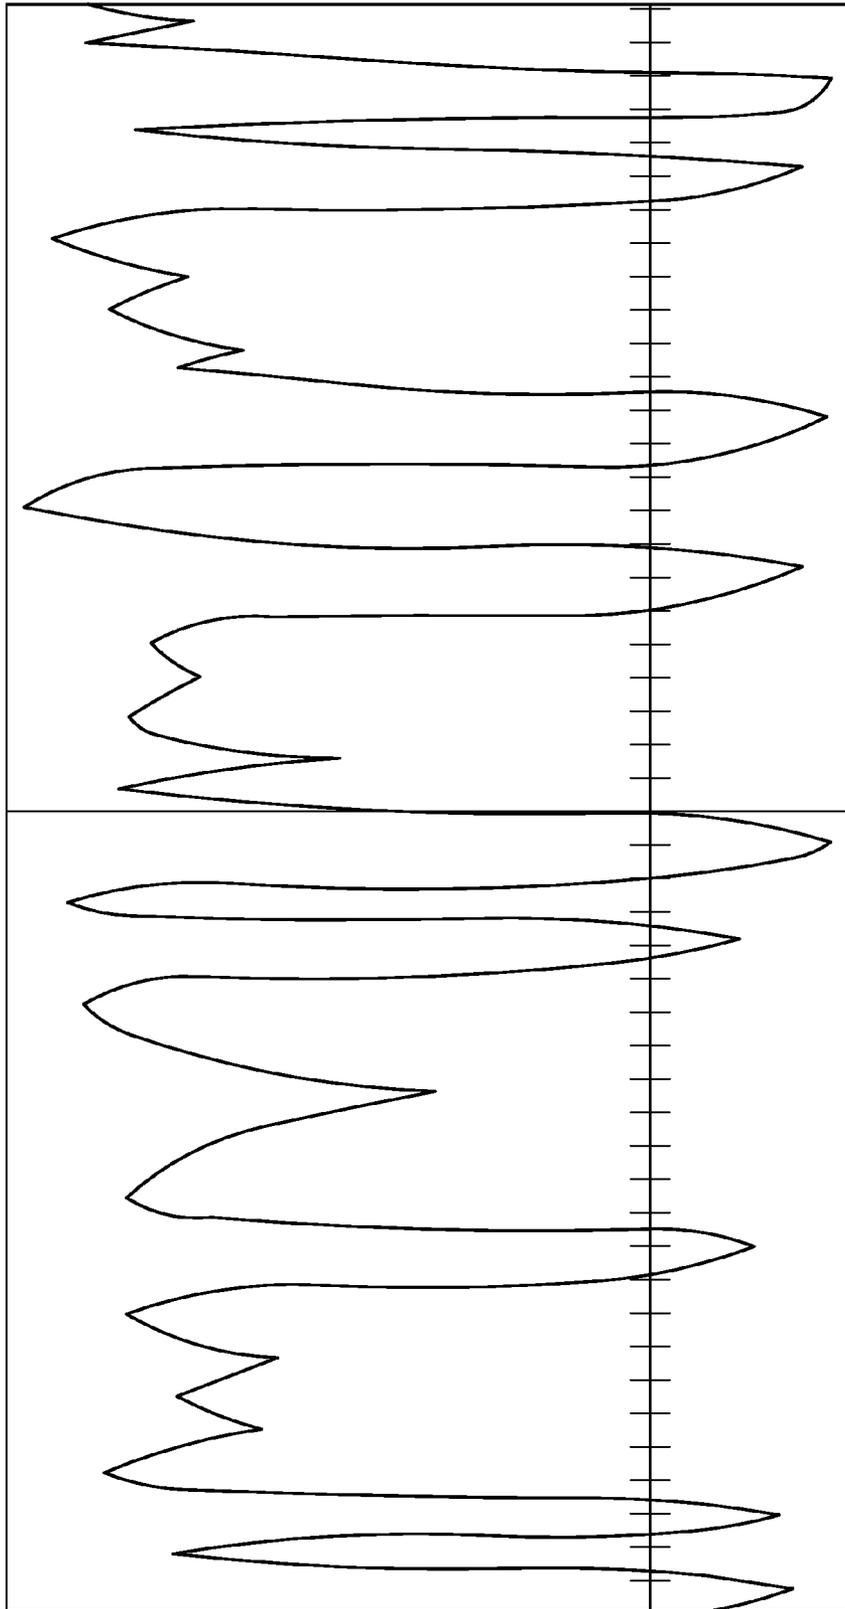


ACTUAL CVR VIDEO SIGNAL

FIG-4

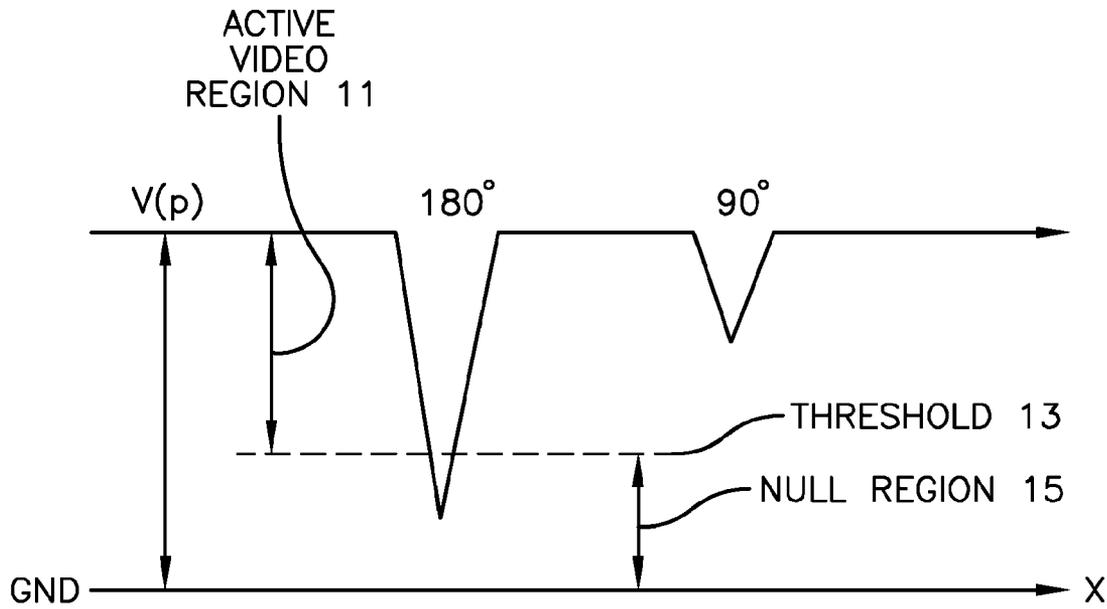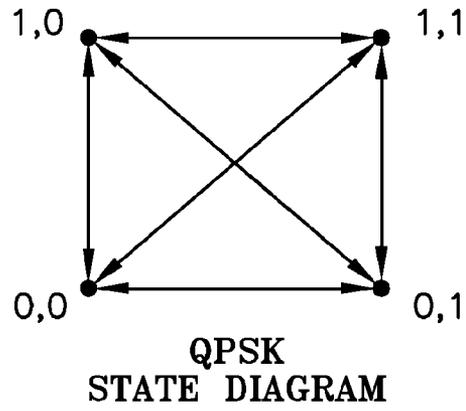

**FIG-5**

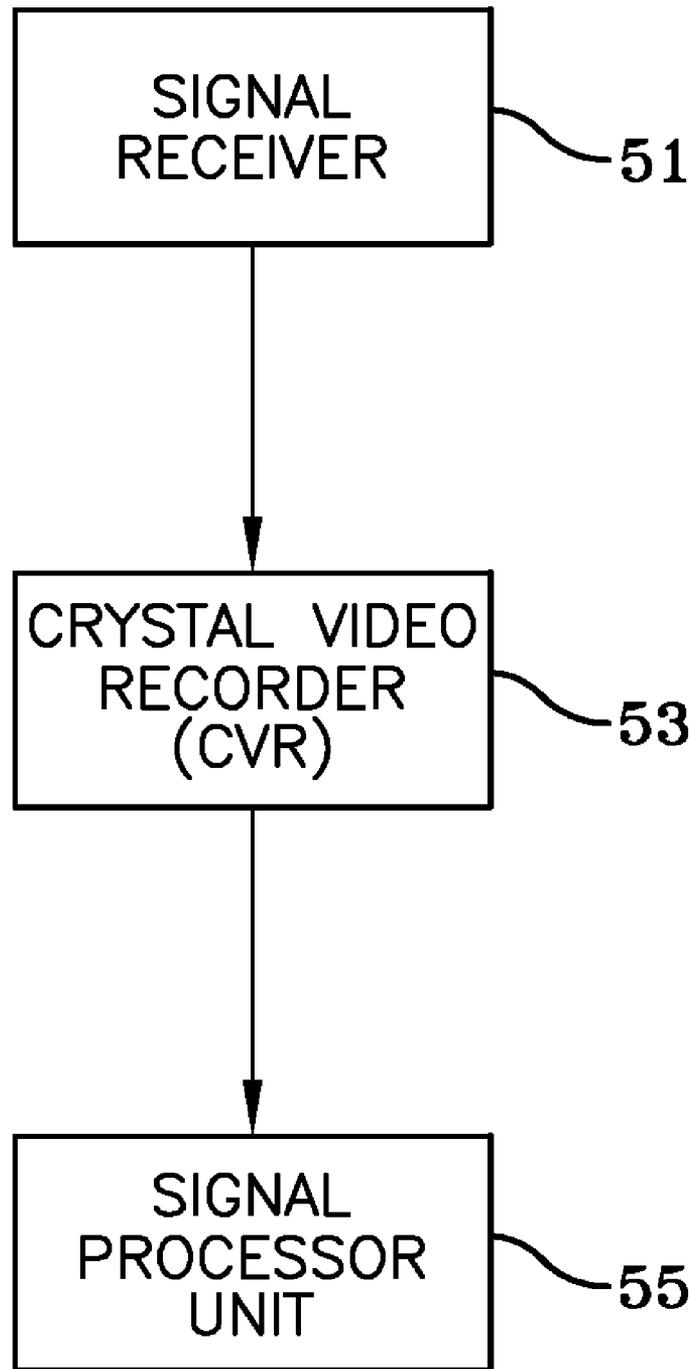

**FIG-6**

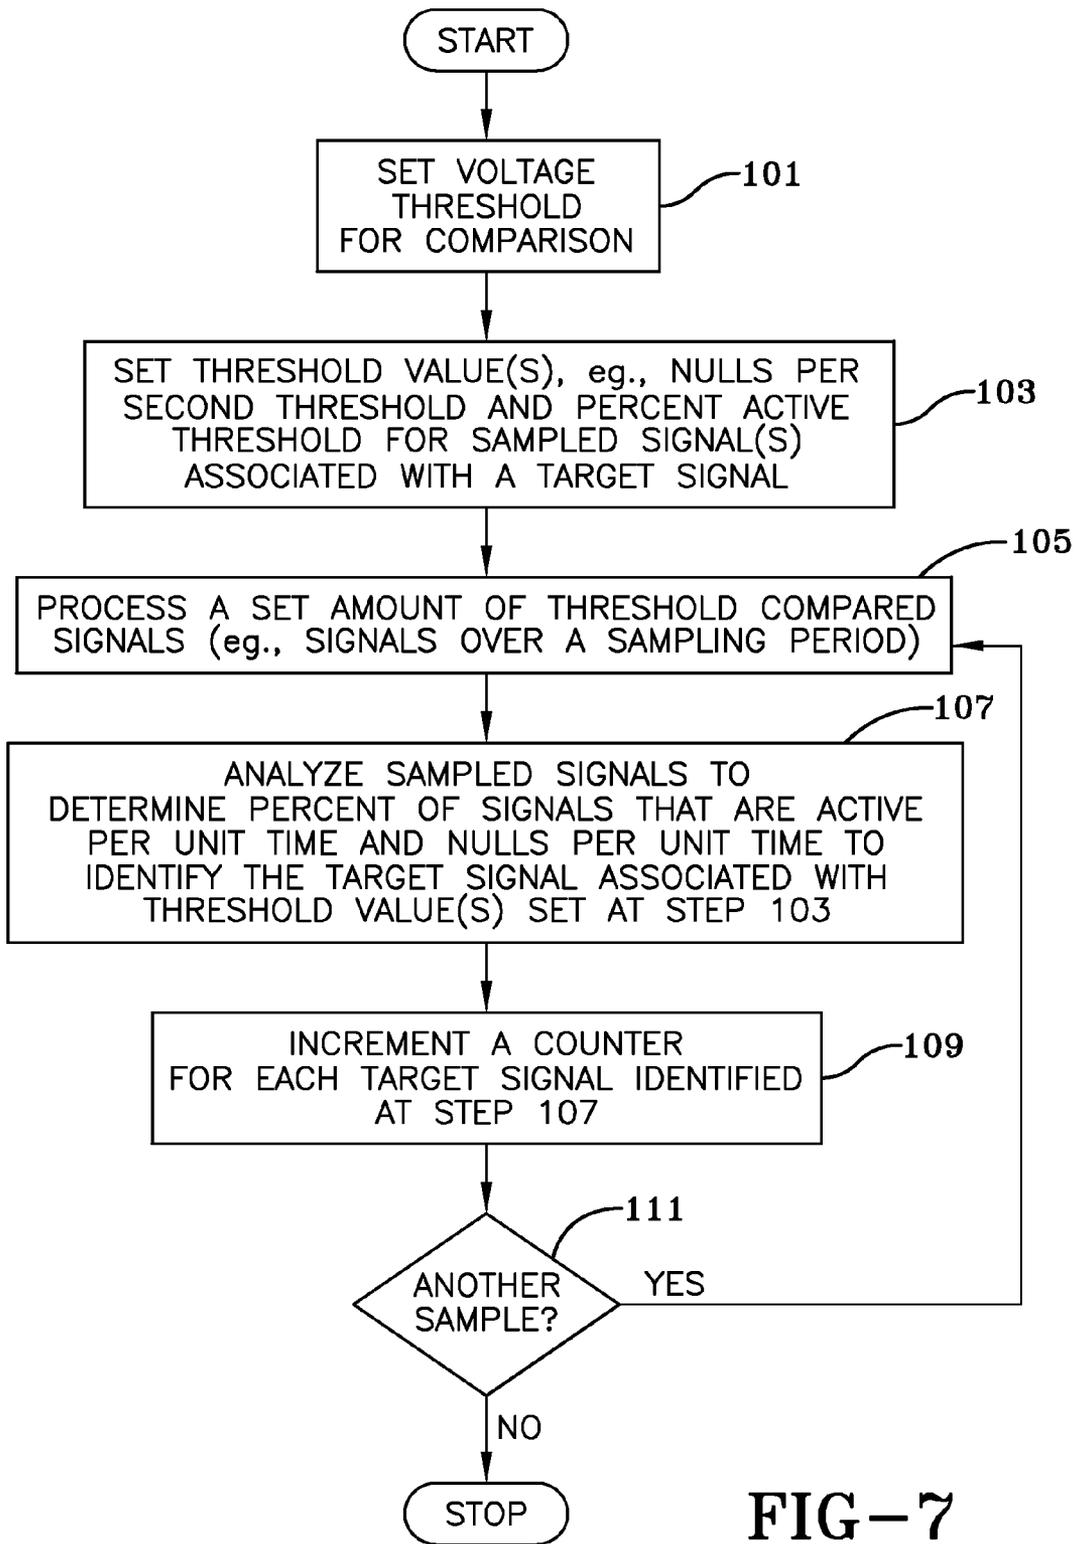


FIG-7

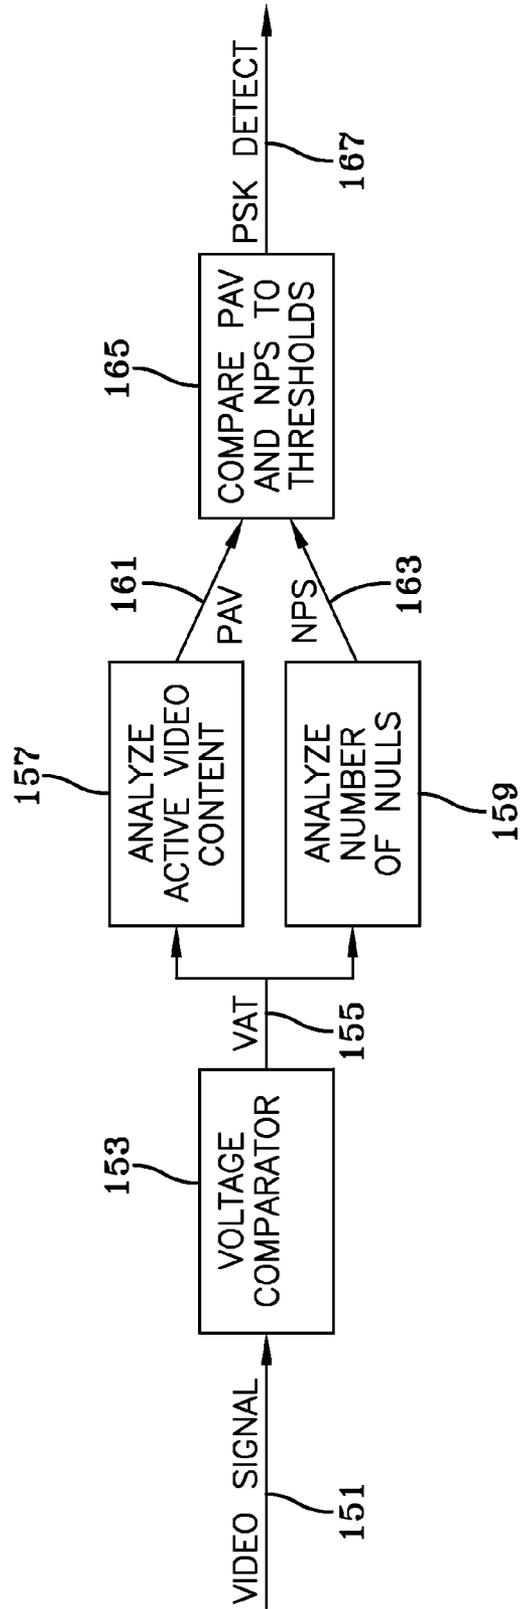


FIG-8



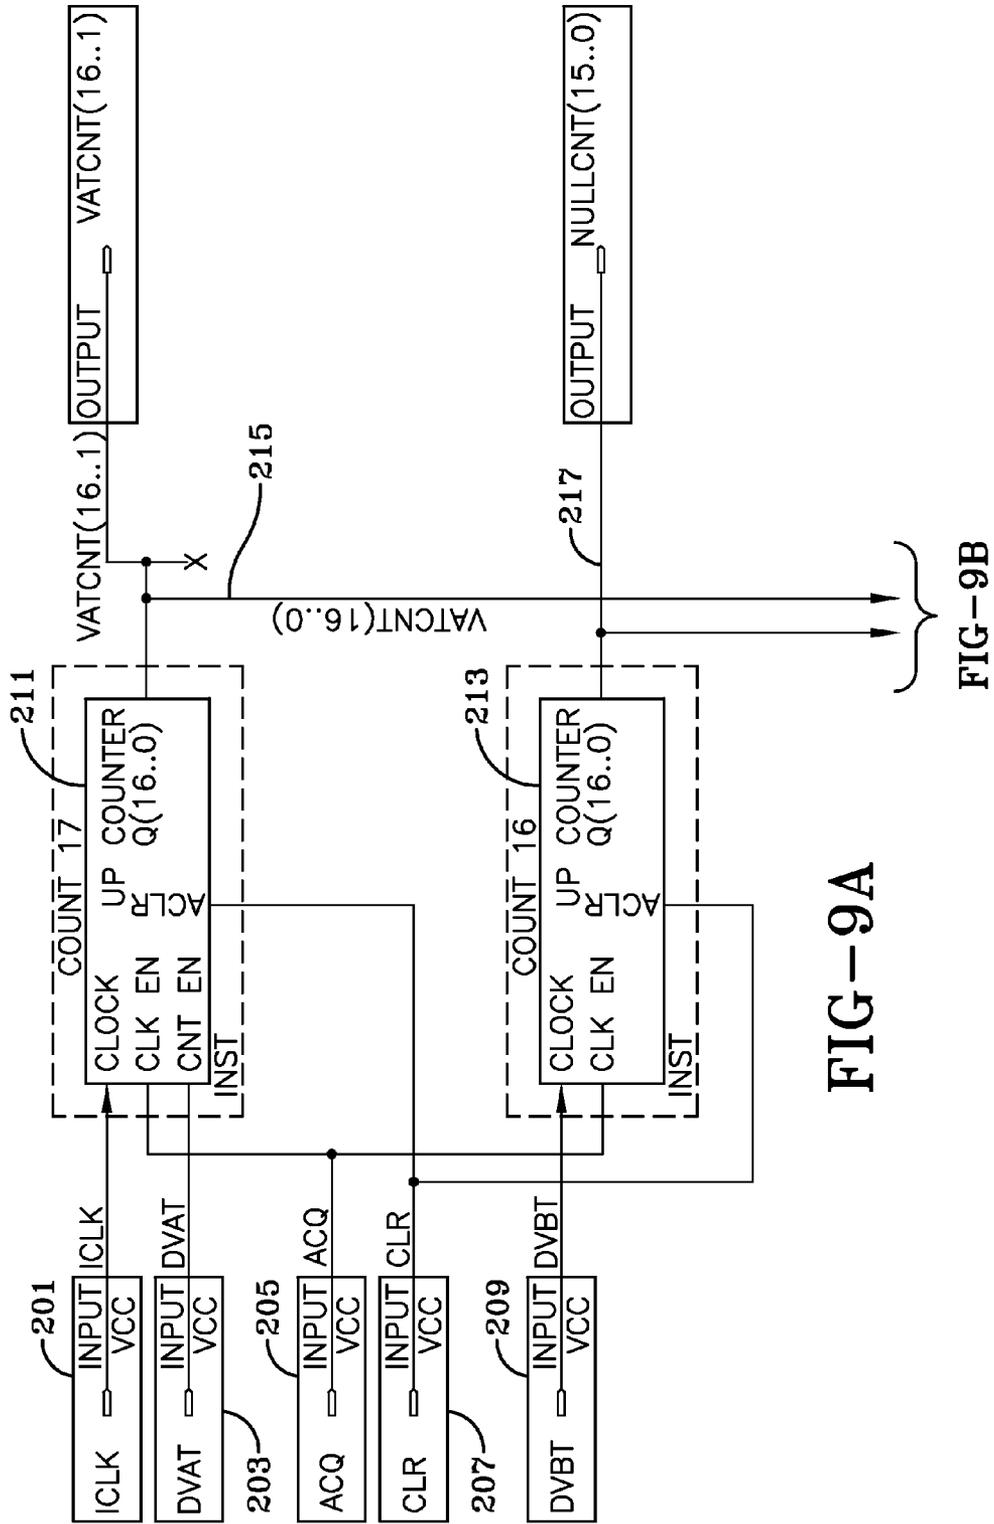


FIG-9A

FIG-9B

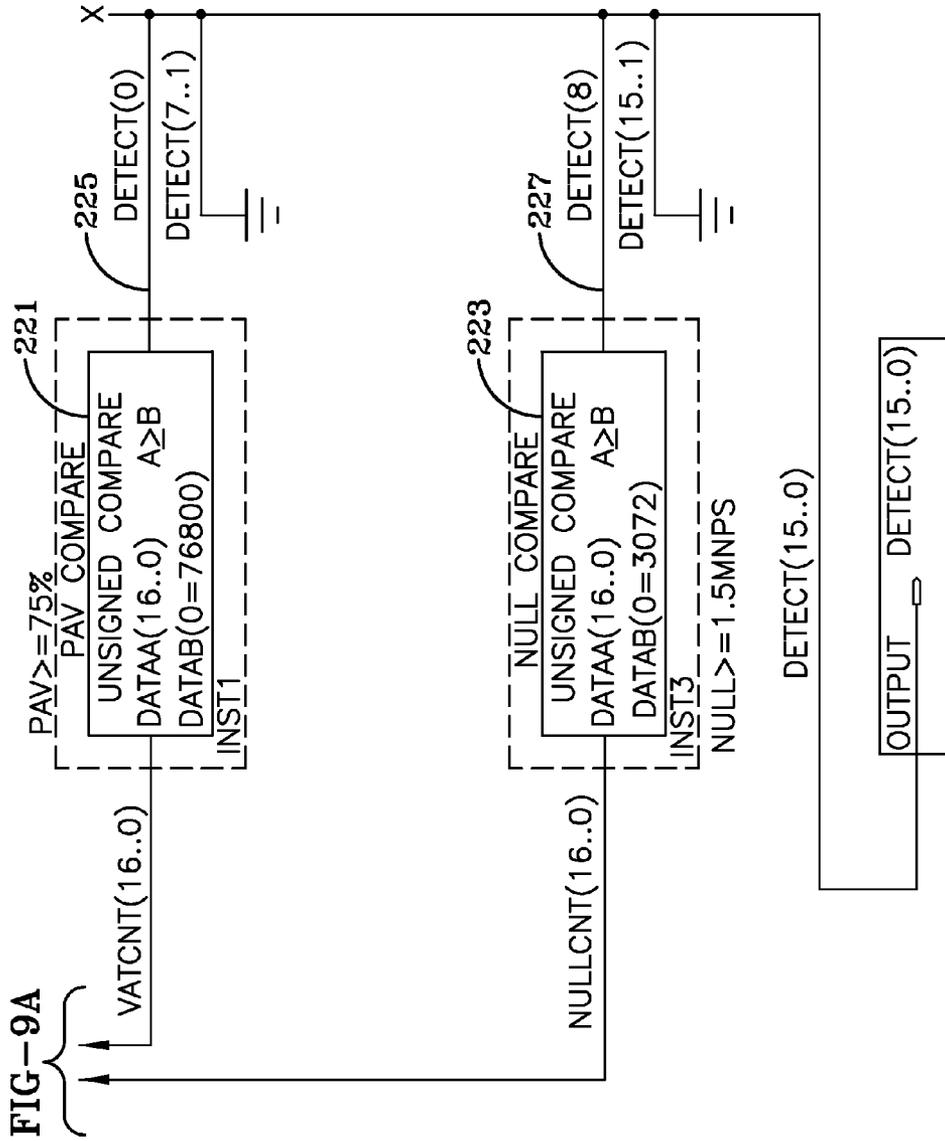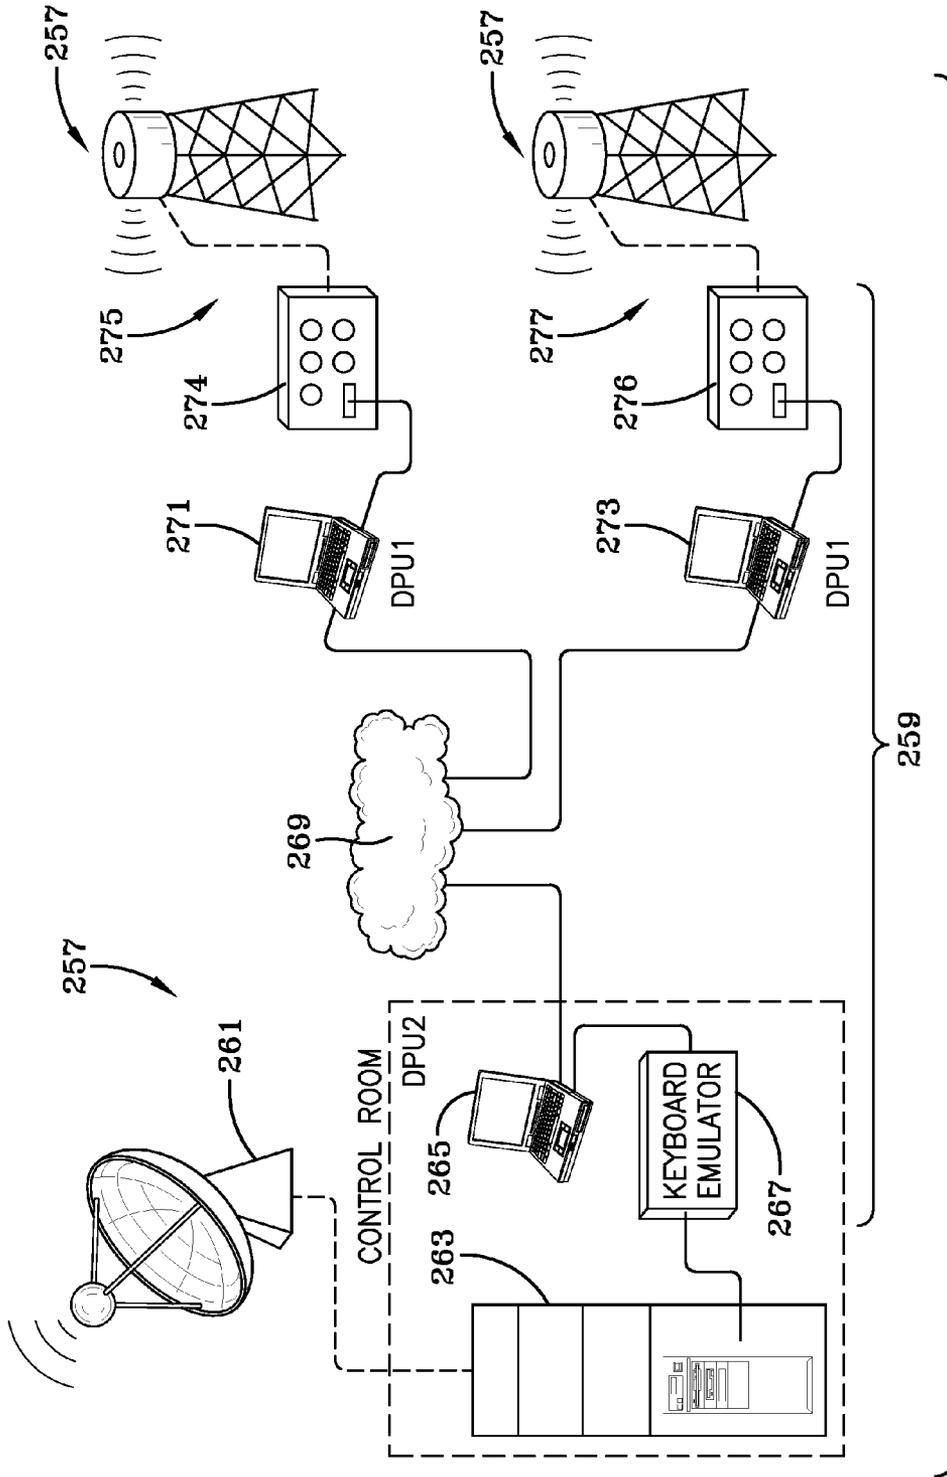

**FIG-9B**



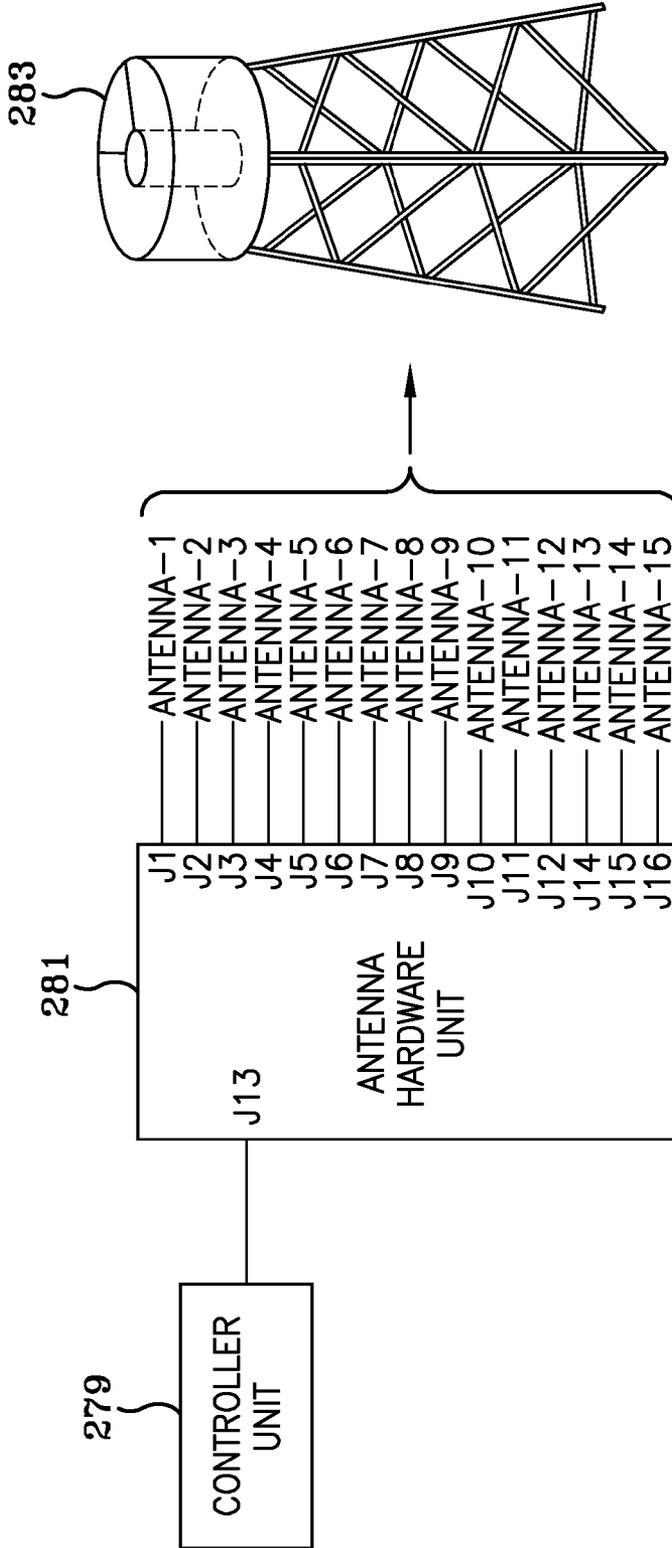


FIG-11

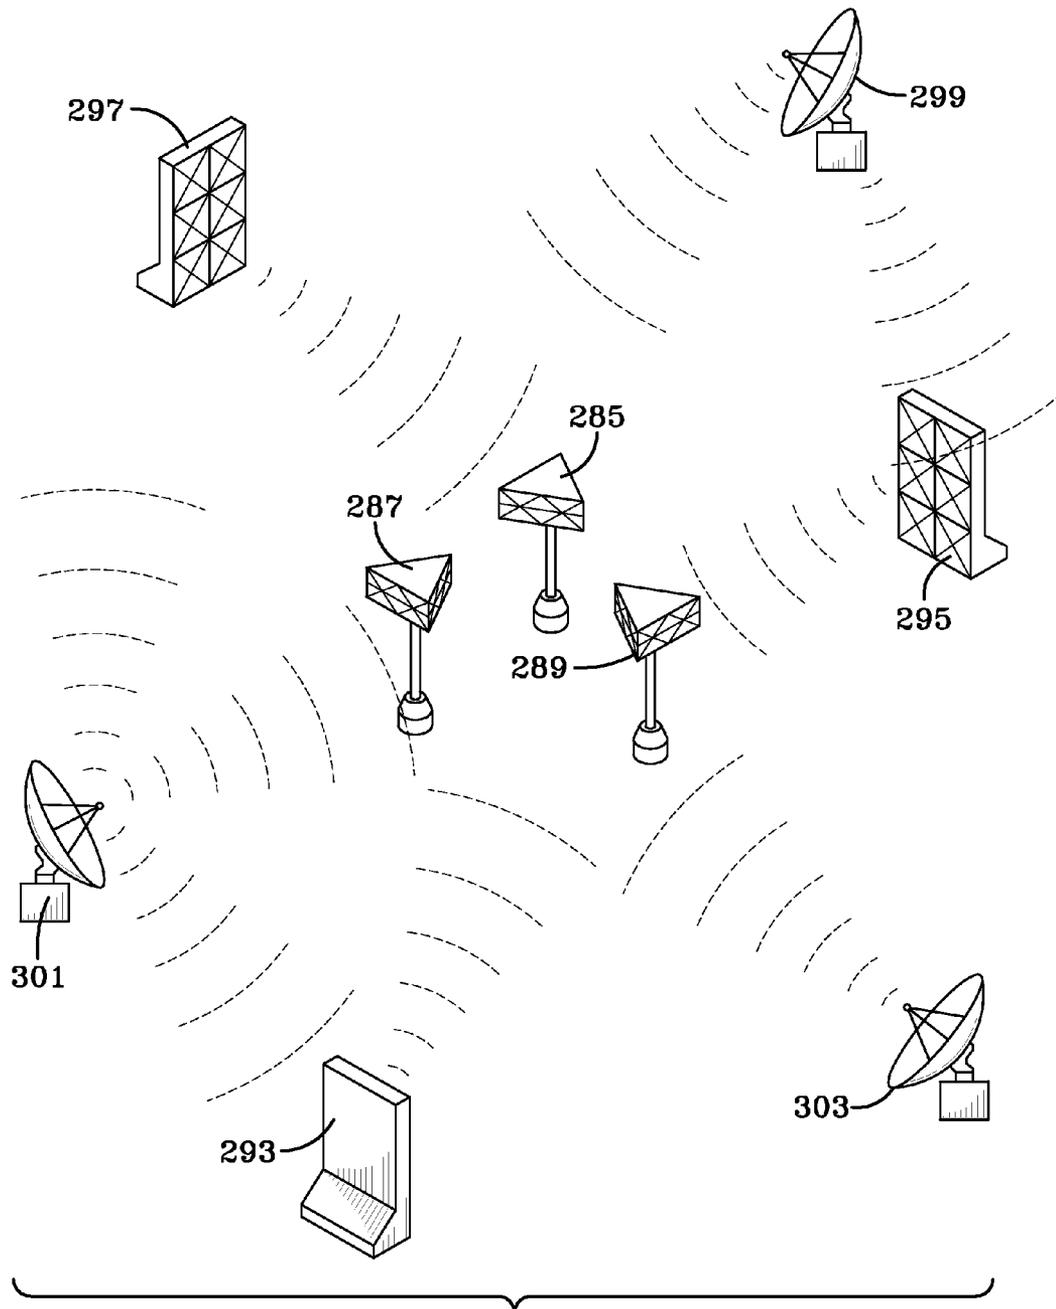


FIG-12

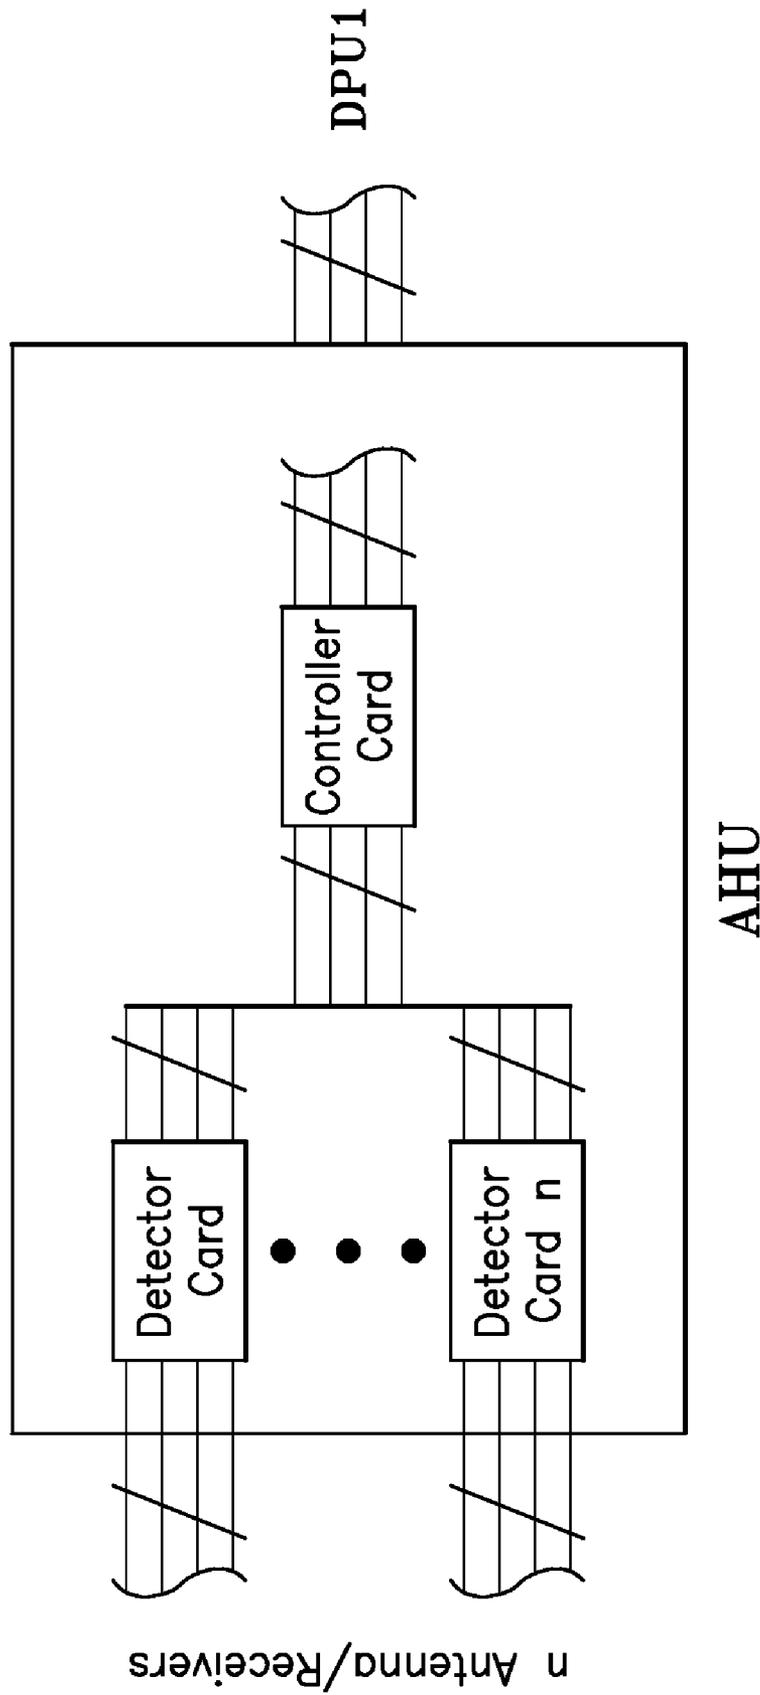


FIG-13

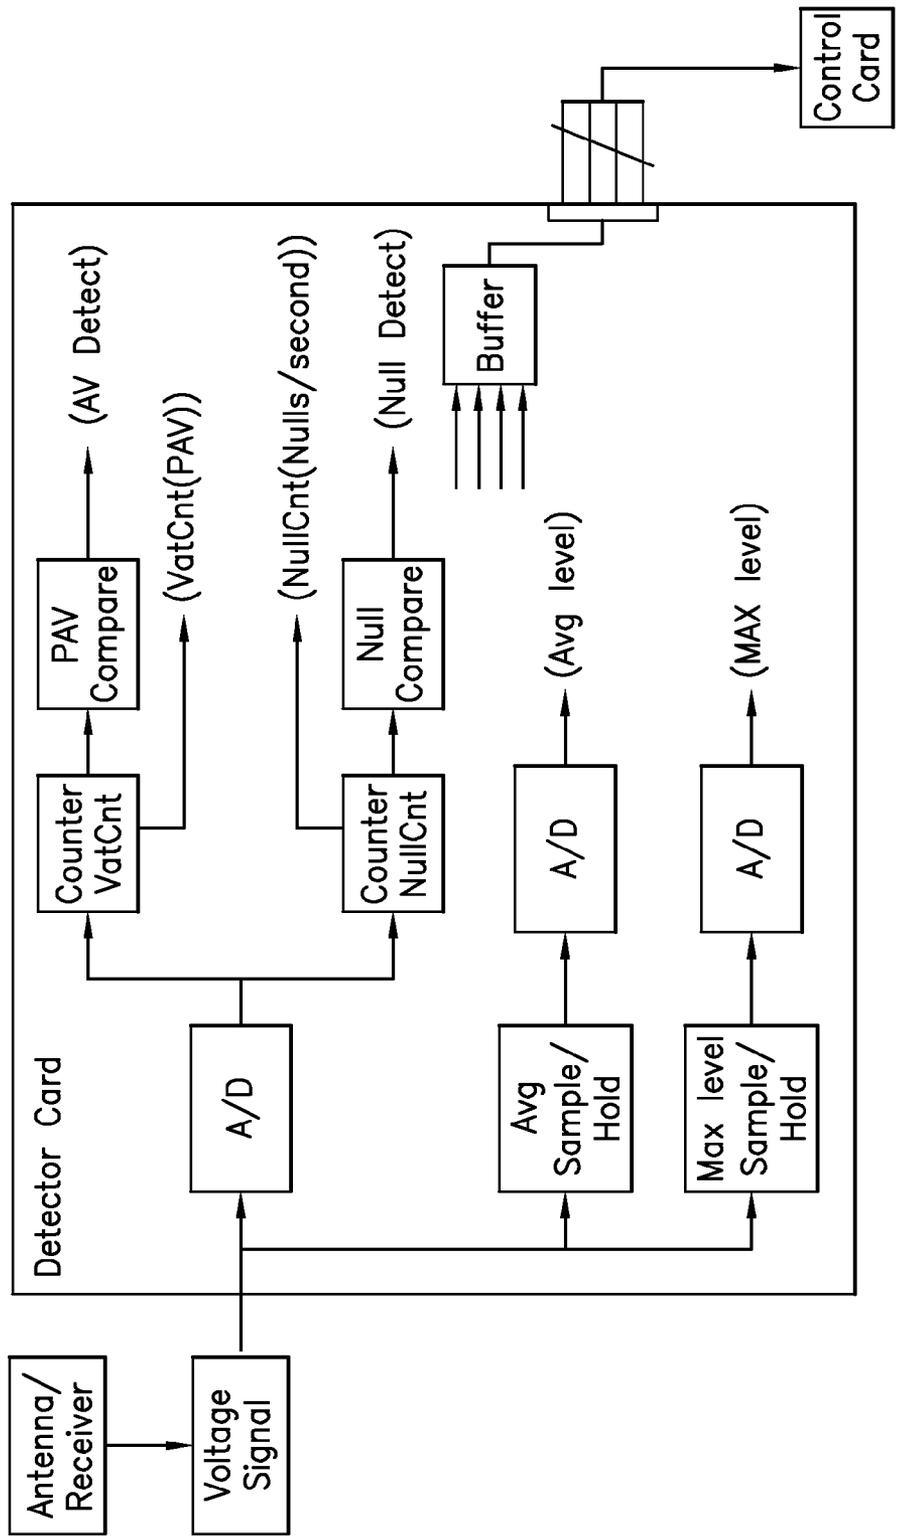


FIG-14

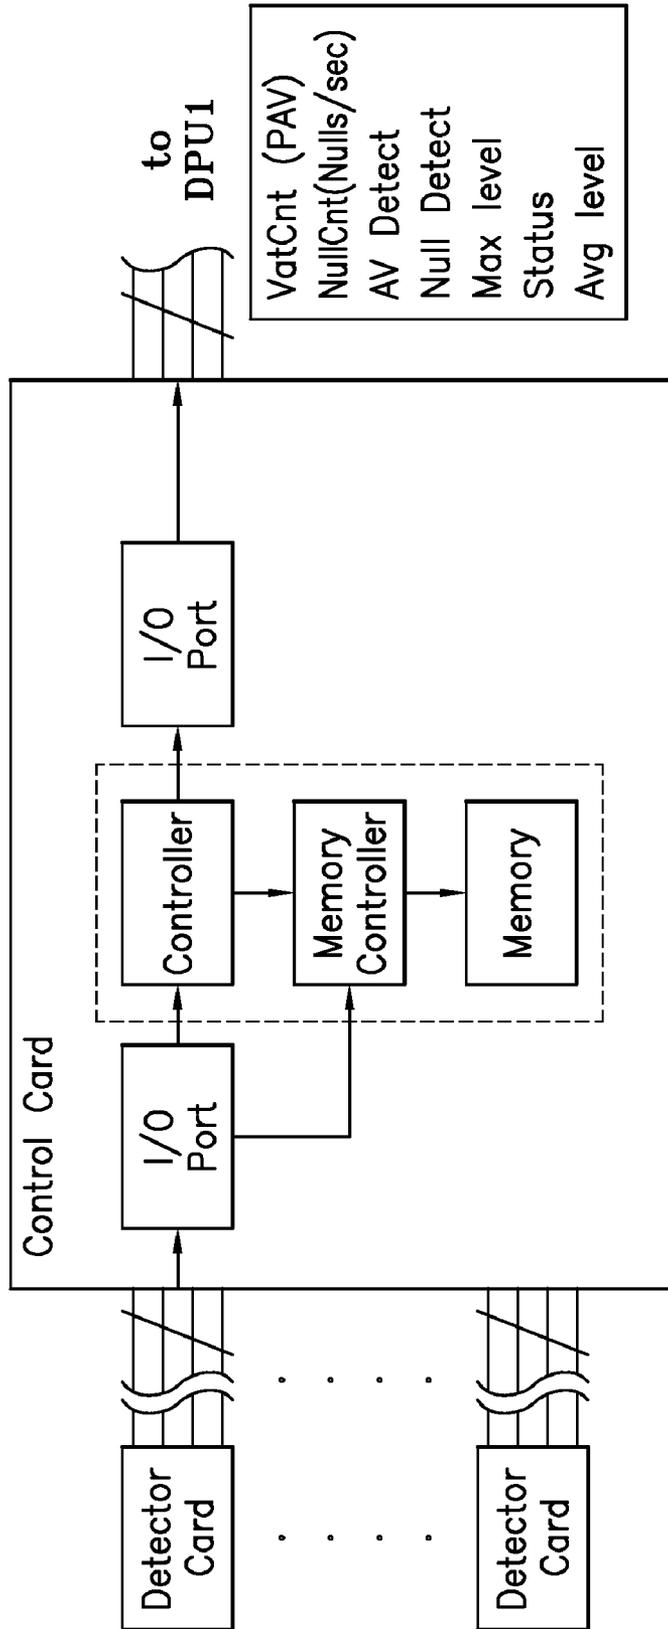


FIG-15


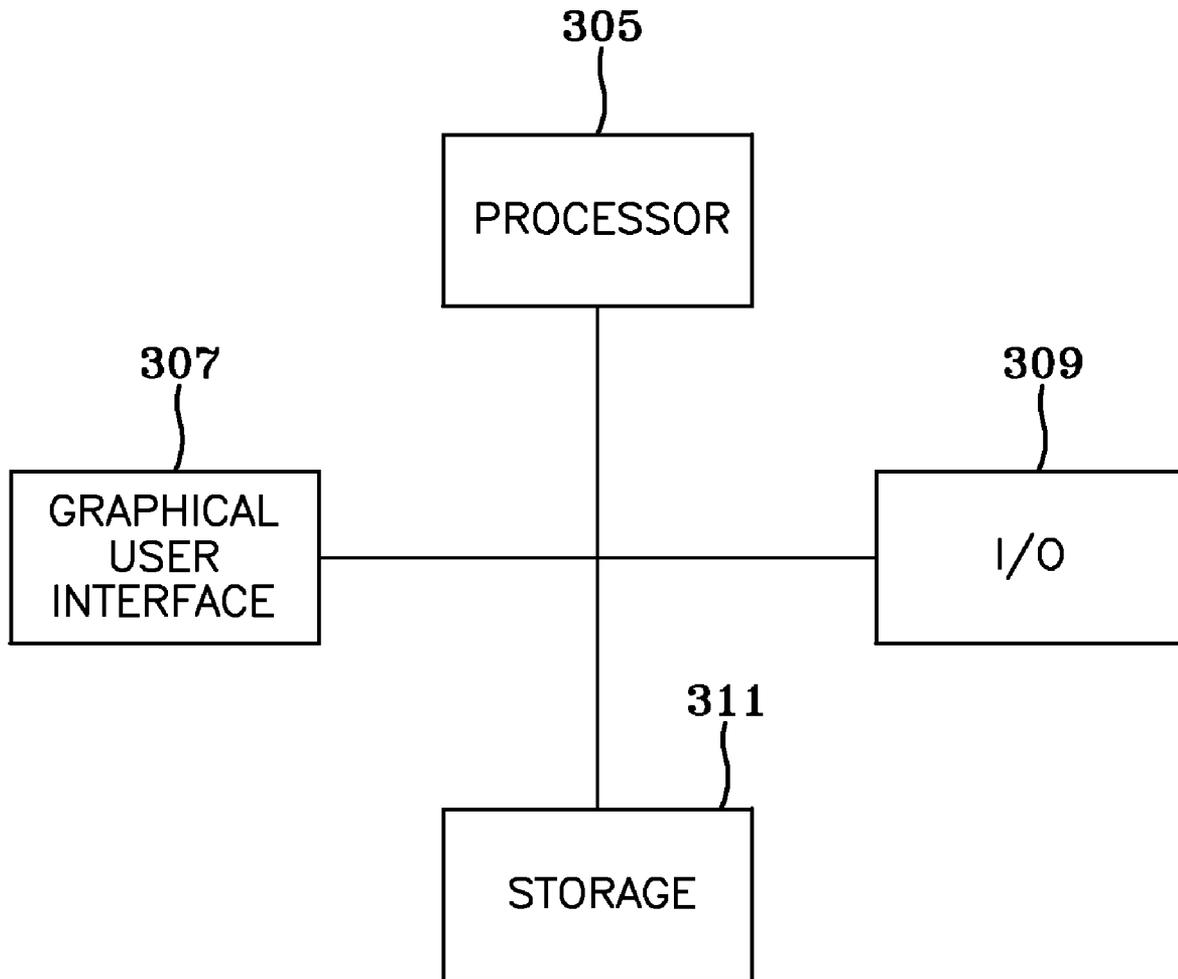


FIG-16

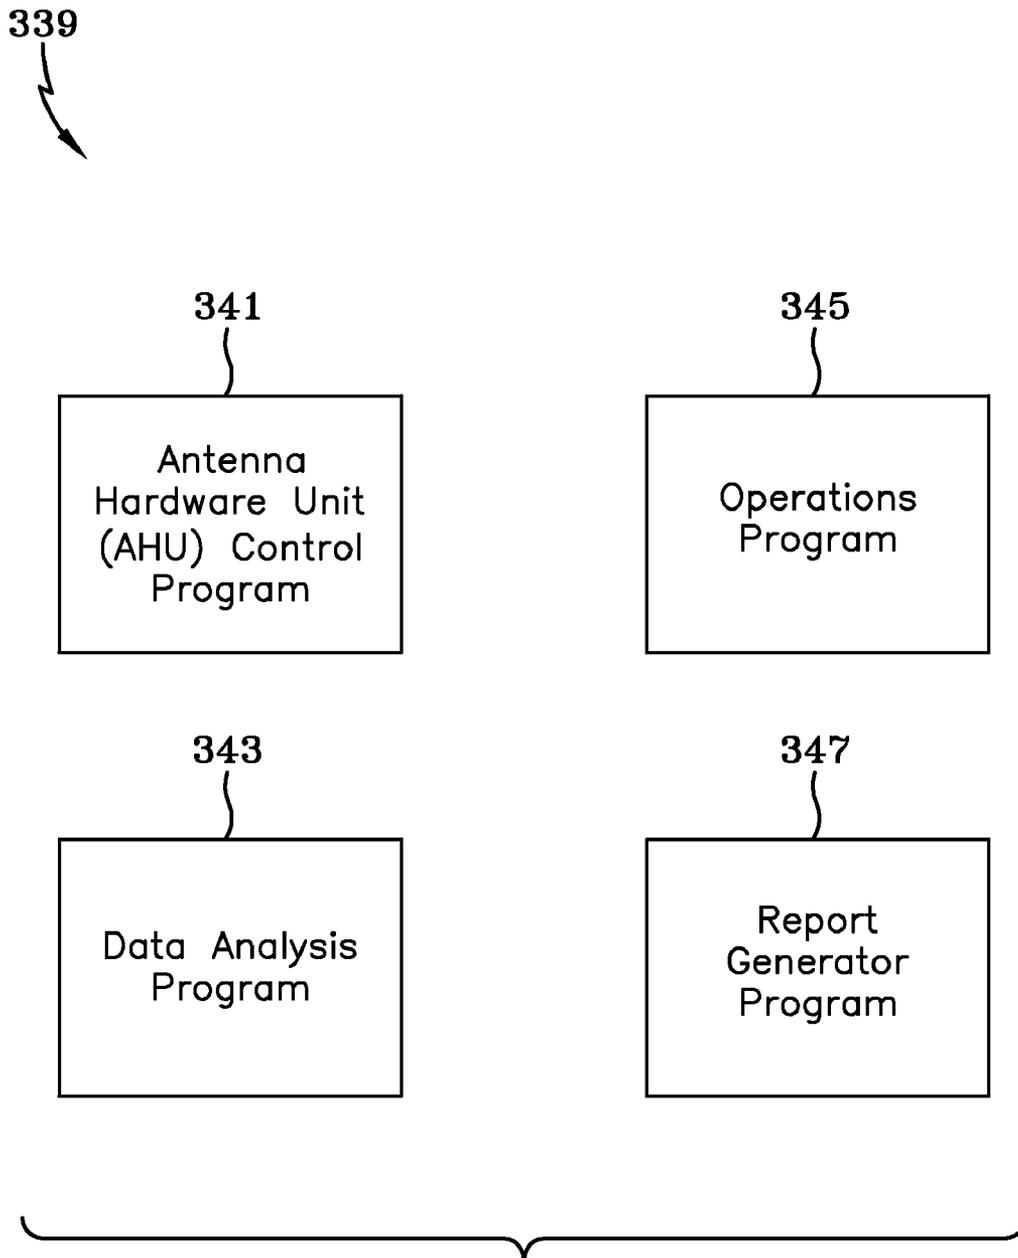

Extension	Name	Data Content	File Type
.head	Test header	Test name, date, personnel, program version, SATCOM system antenna, channels, modulation, data rate, setting comments, notes	Text file
.set	Test settings	frequency, attenuation, sweep dimensions, sweep type, azimuth start, azimuth increment, azimuth stop, etc.	Text file
.eahu	EAST AHU test data	Time, pointing angle, AHU data	LabVIEW binary data
.wahu	WEST AHU test data	Time, pointing angle, AHU data	LabVIEW binary data
.eeb	EAST Environmental Baseline data	Time, pointing angle, AHU data	LabVIEW binary data
.web	WEST Environmental Baseline data	Time, pointing angle, AHU data	LabVIEW binary data
.flt	Filter Settings	List receiving antennas or beam ports to have data filtered out for Analysis and Report Program	Text file
.cut	Source Antenna Cutout profile	Display the transmit cutout profile of a single transmitter/target signal source, data can be loaded in Analysis and Report Program	Text file

FIG-18

349 →

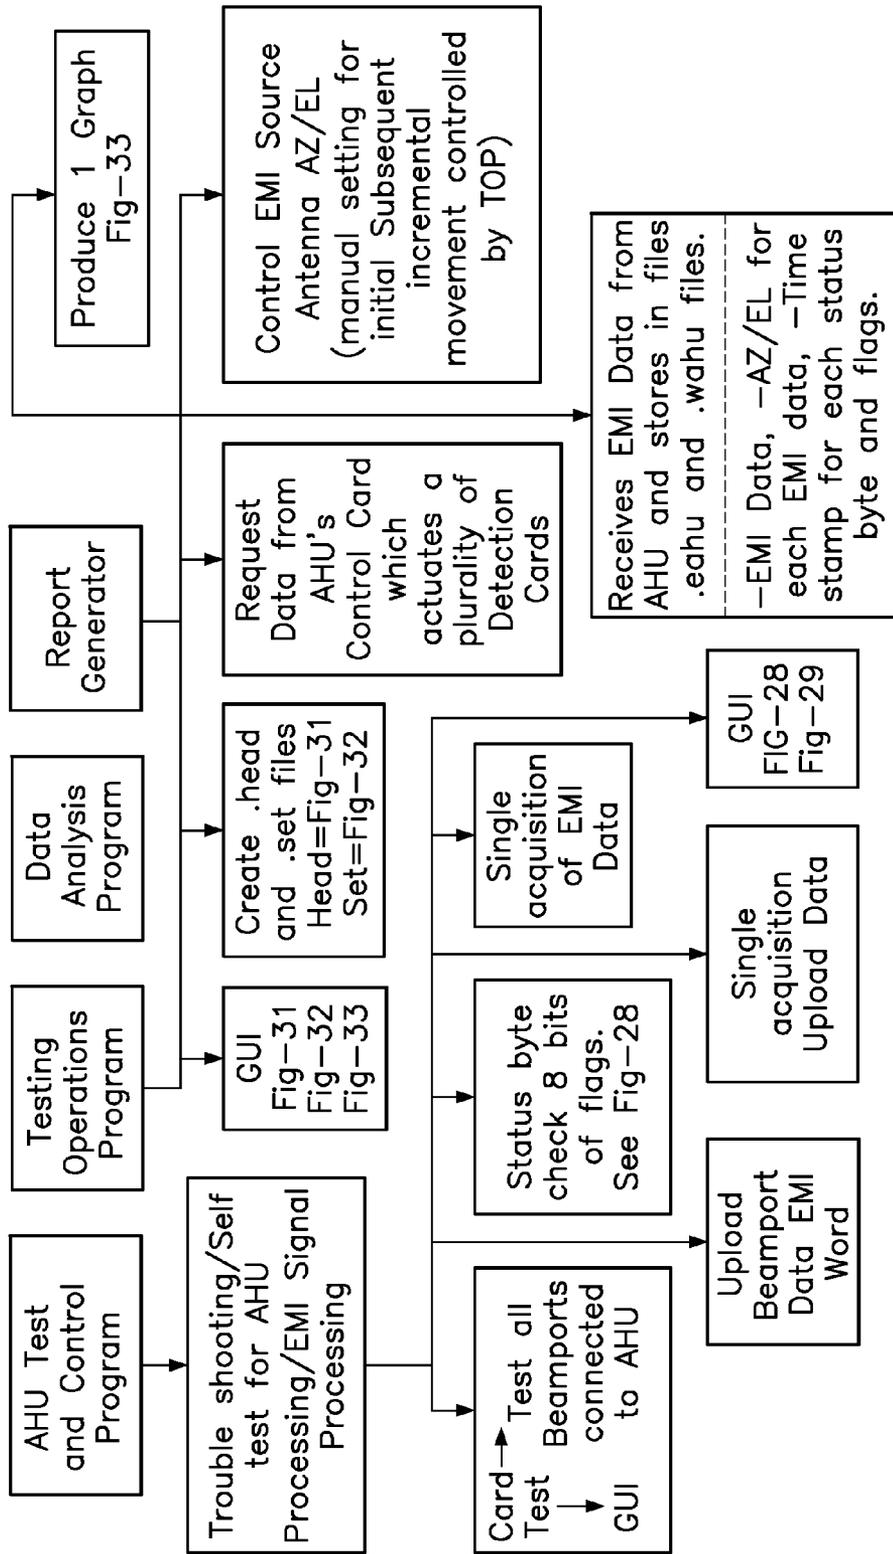


FIG-19

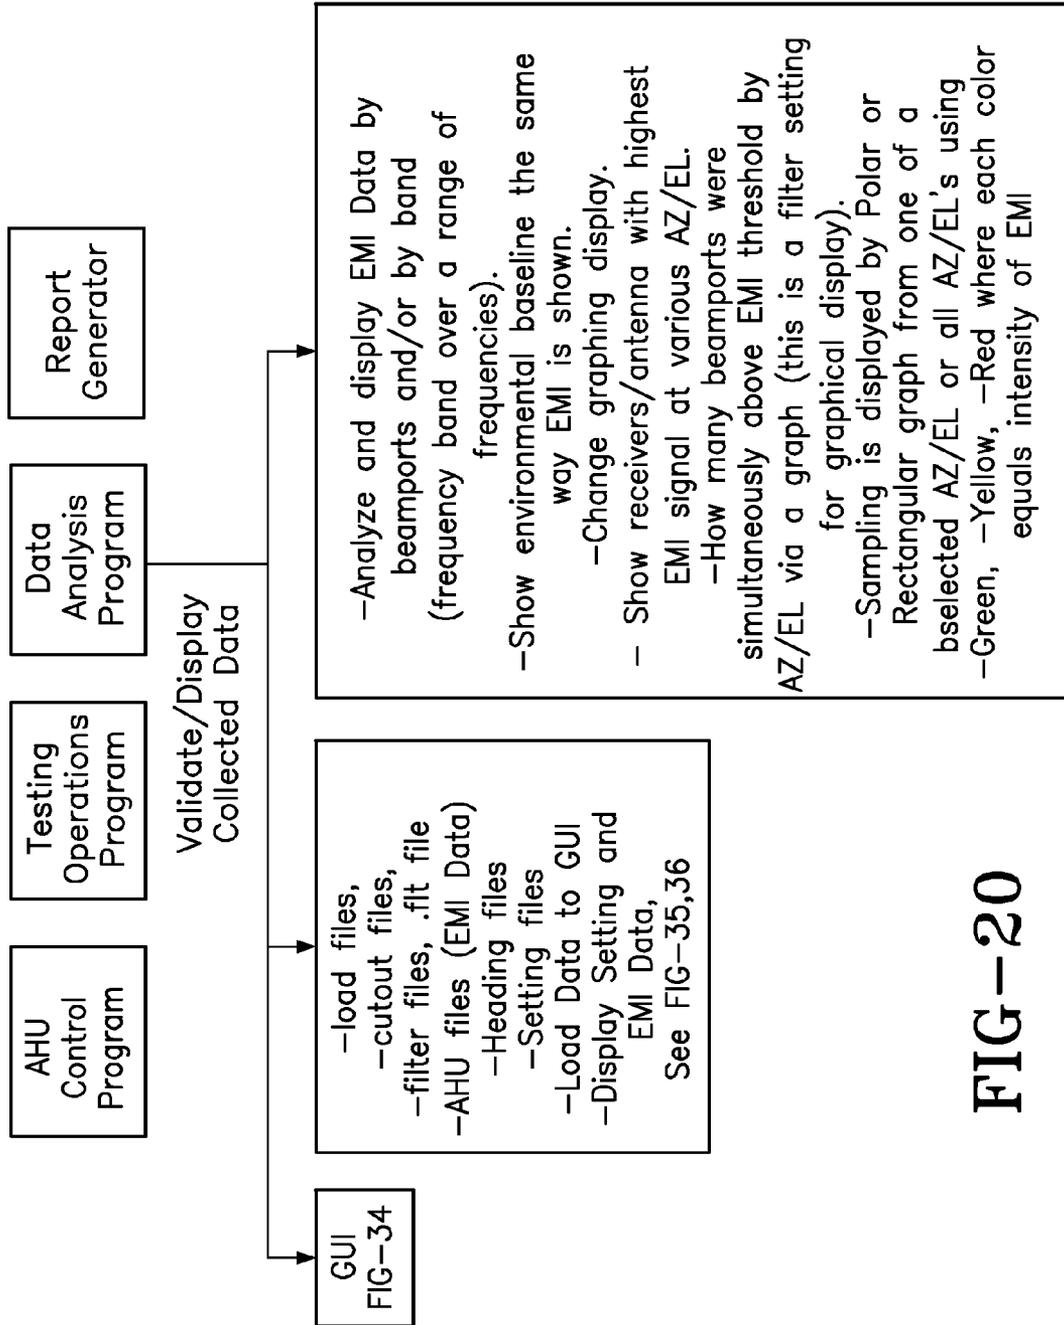


FIG-20

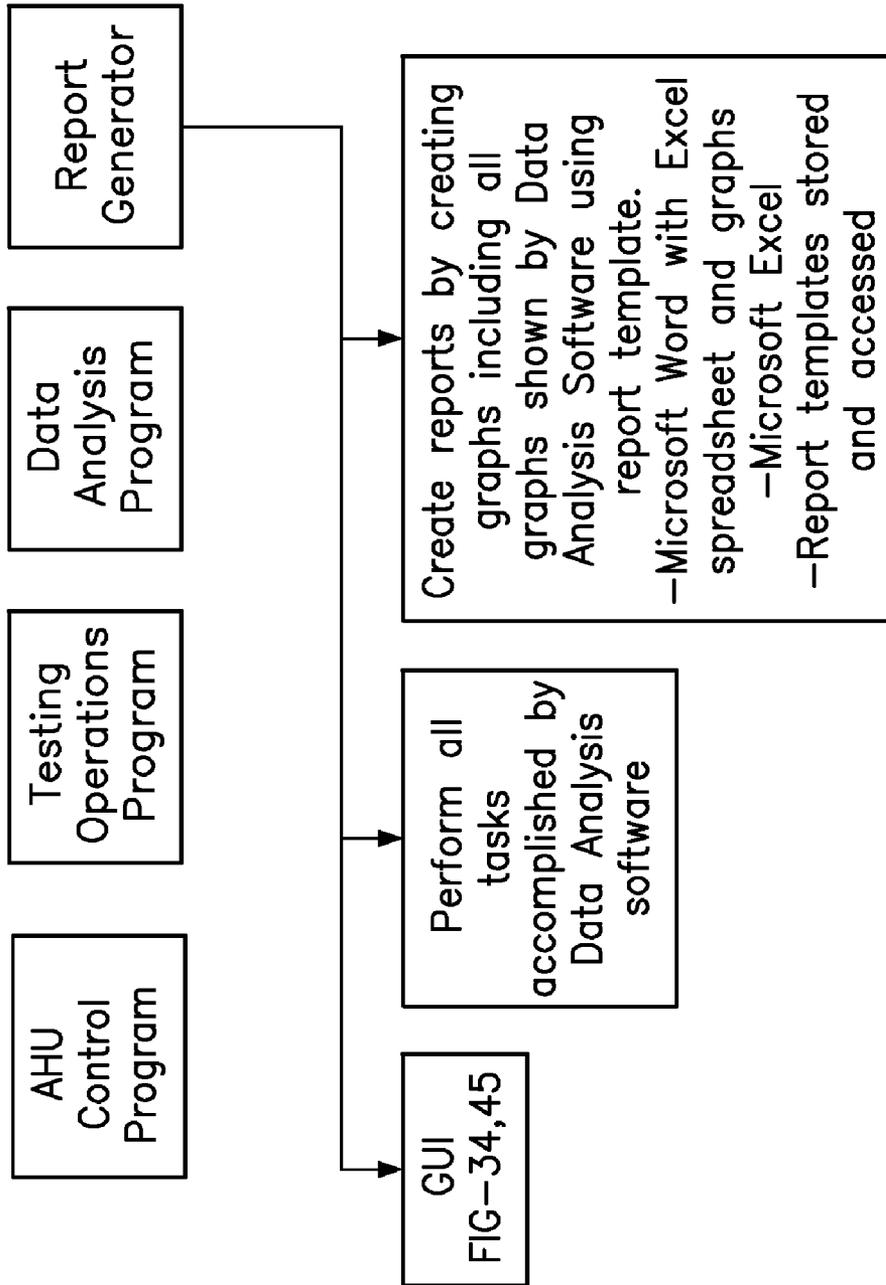


FIG-21

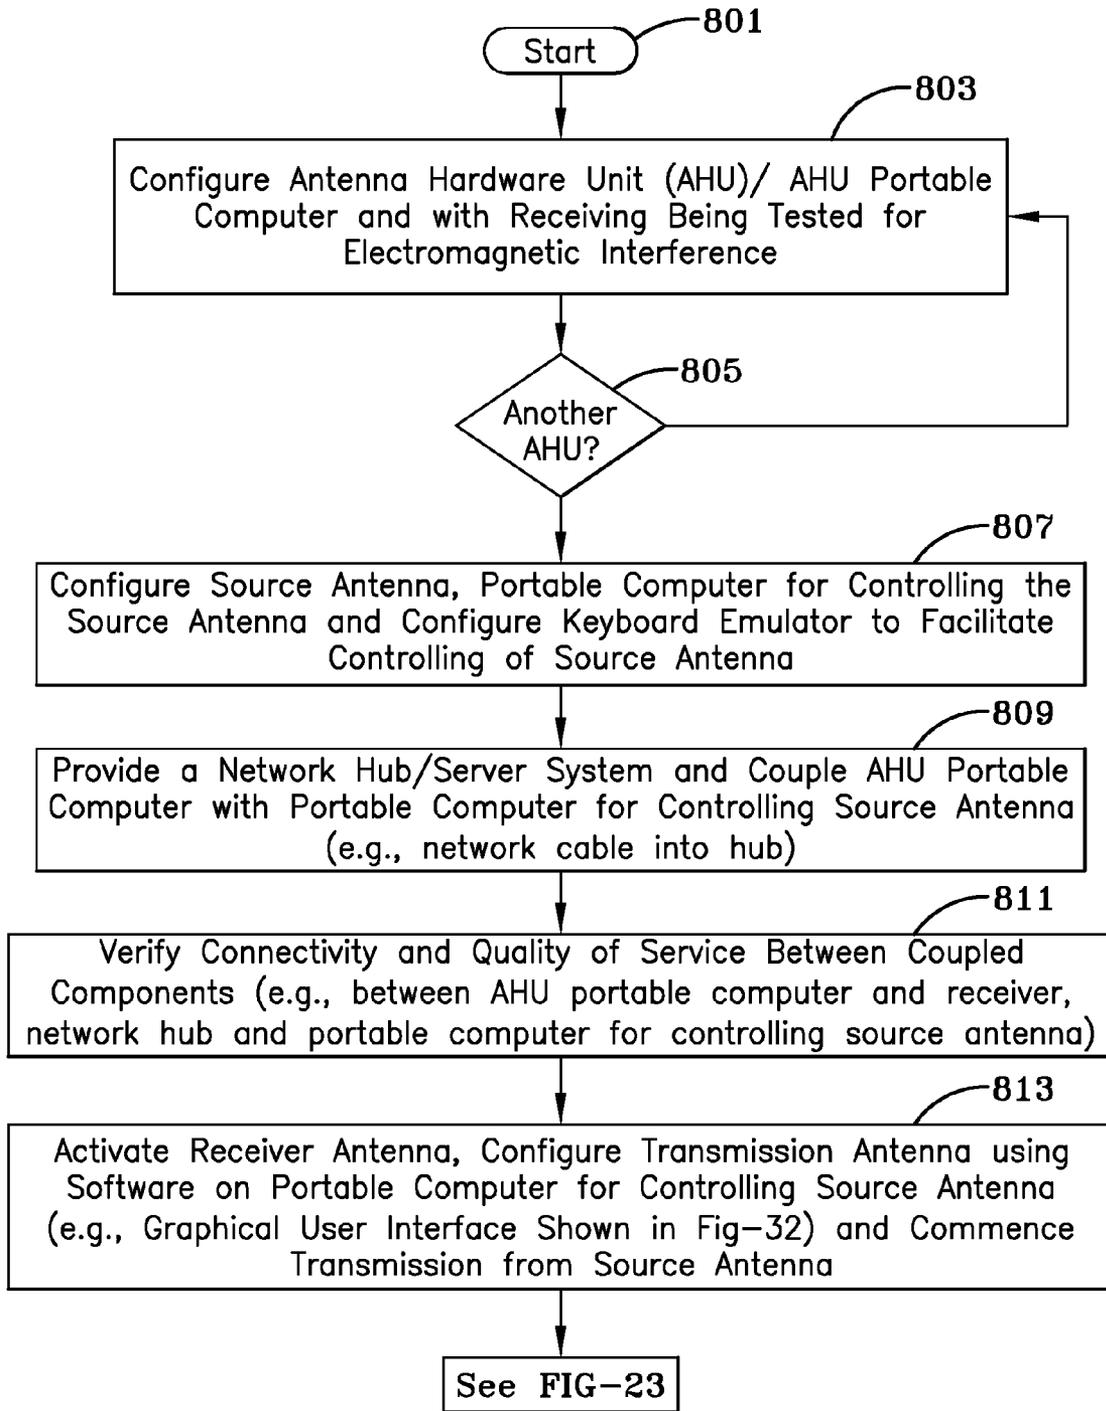


FIG-22


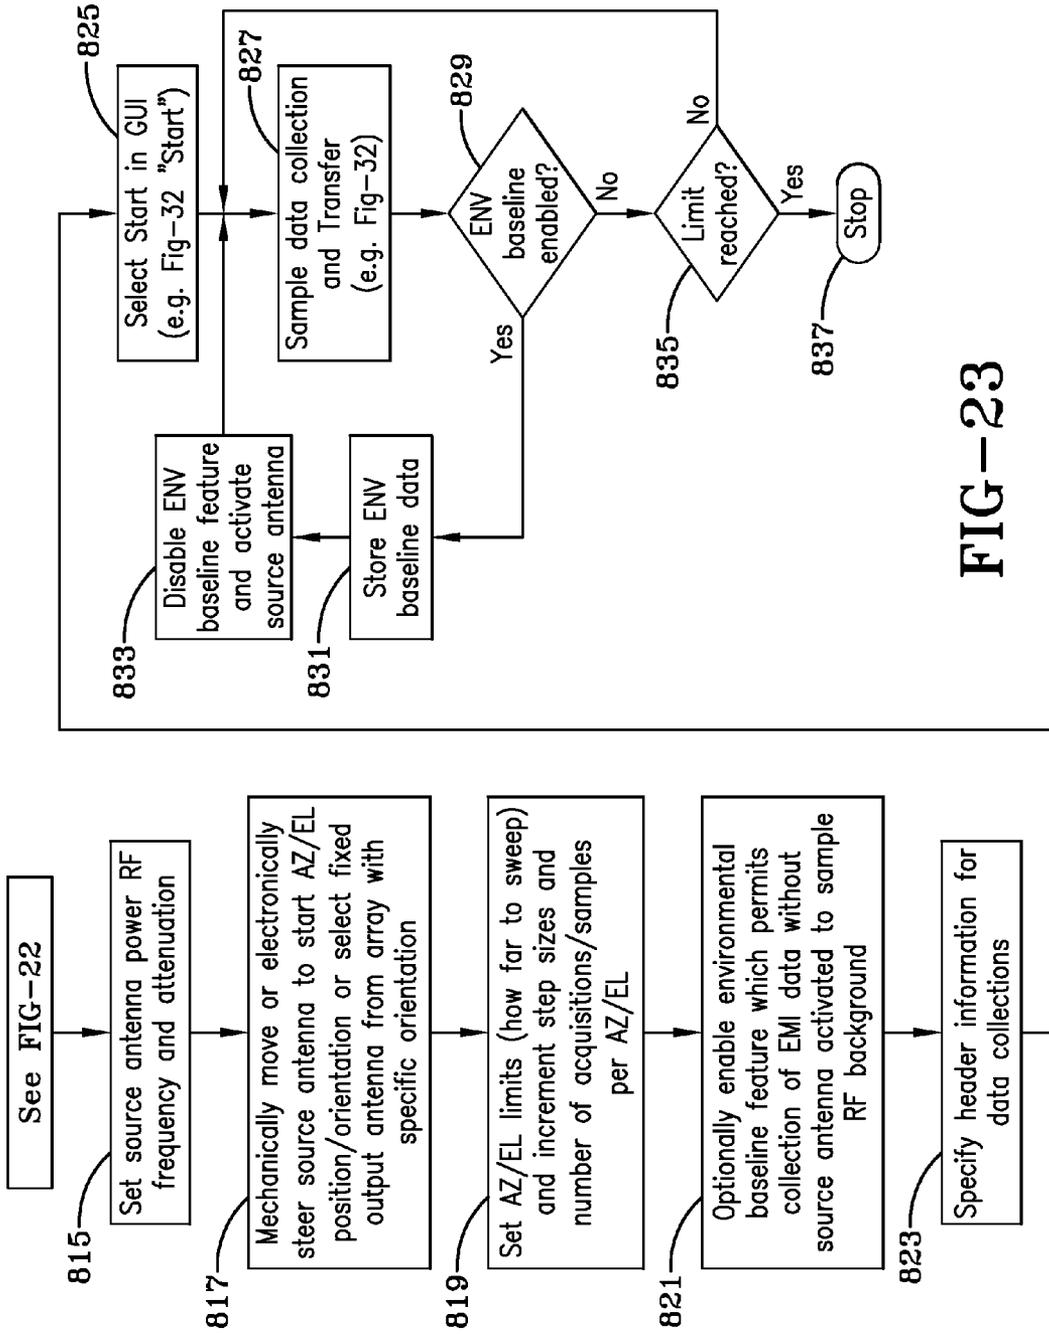


FIG-23

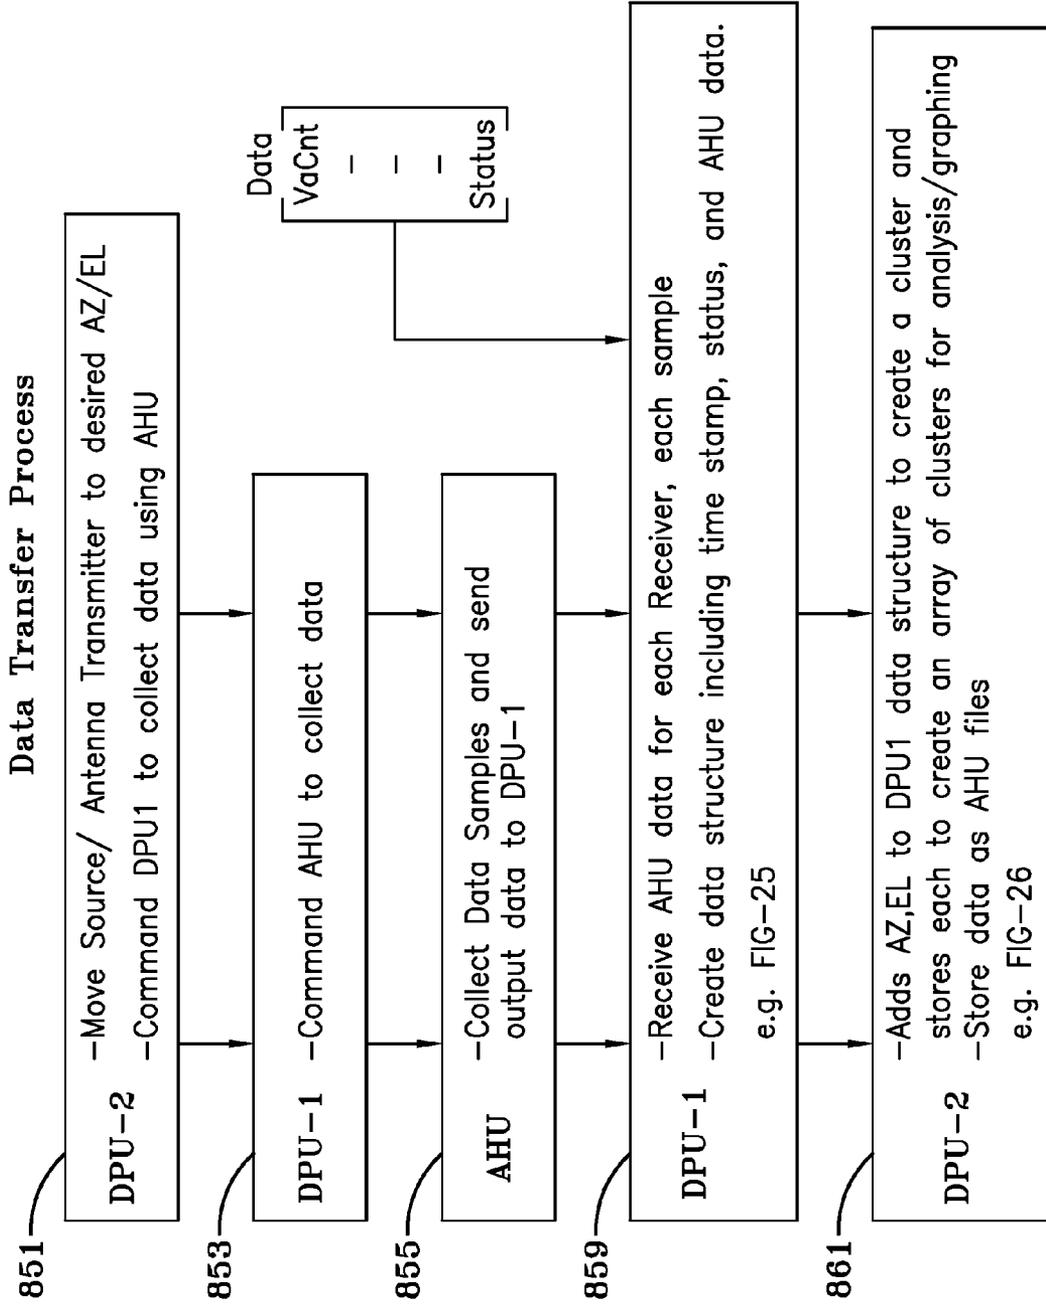

**FIG-24**

DPU1 Sample Data Structure

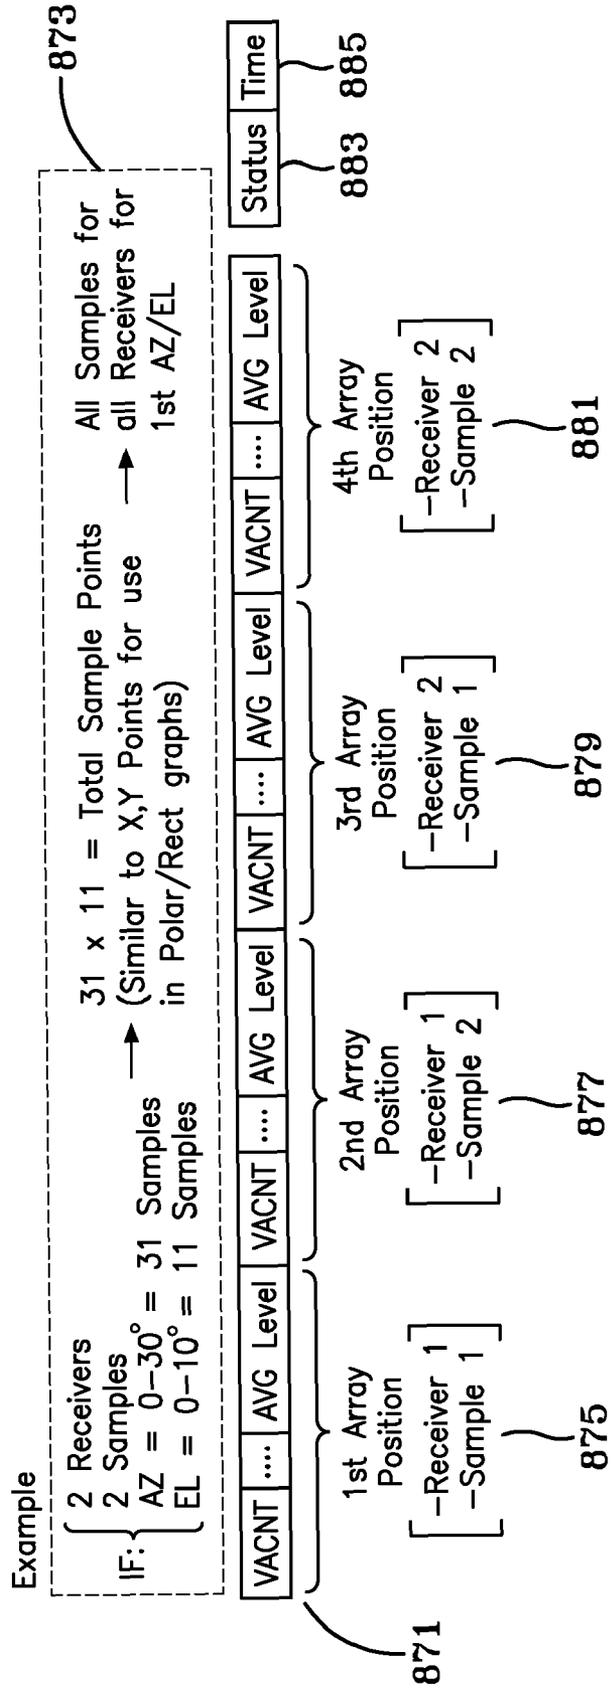
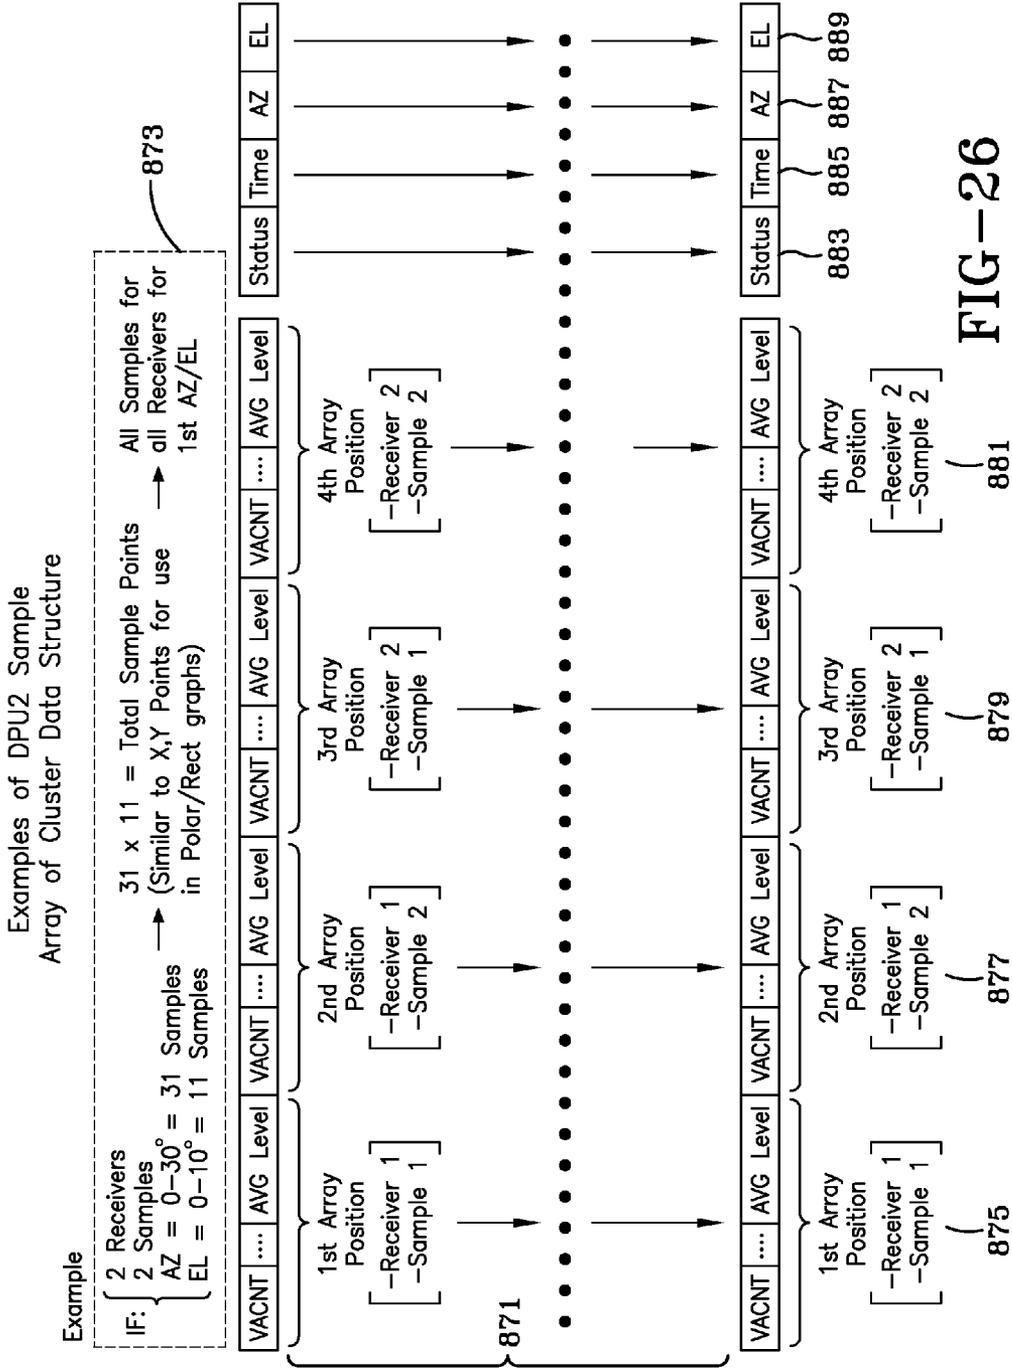


FIG-25



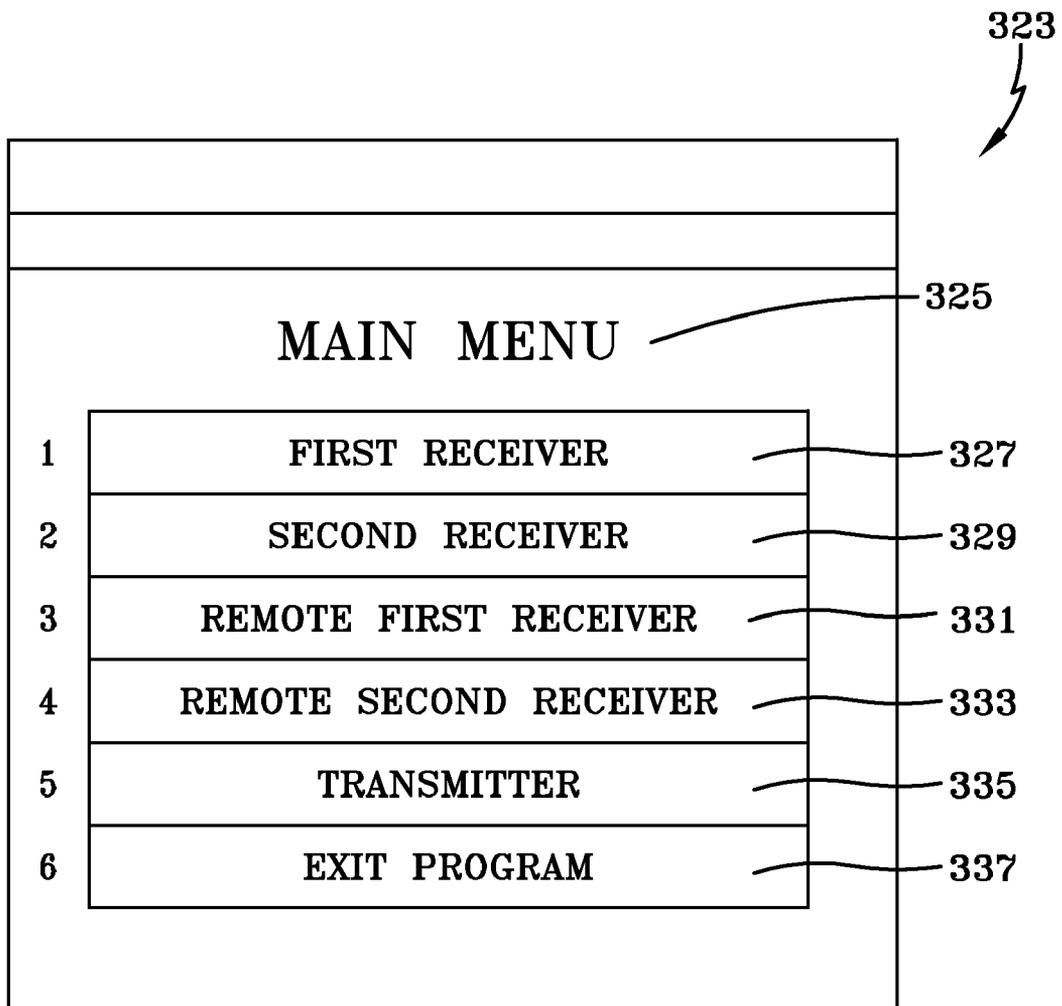


FIG-27

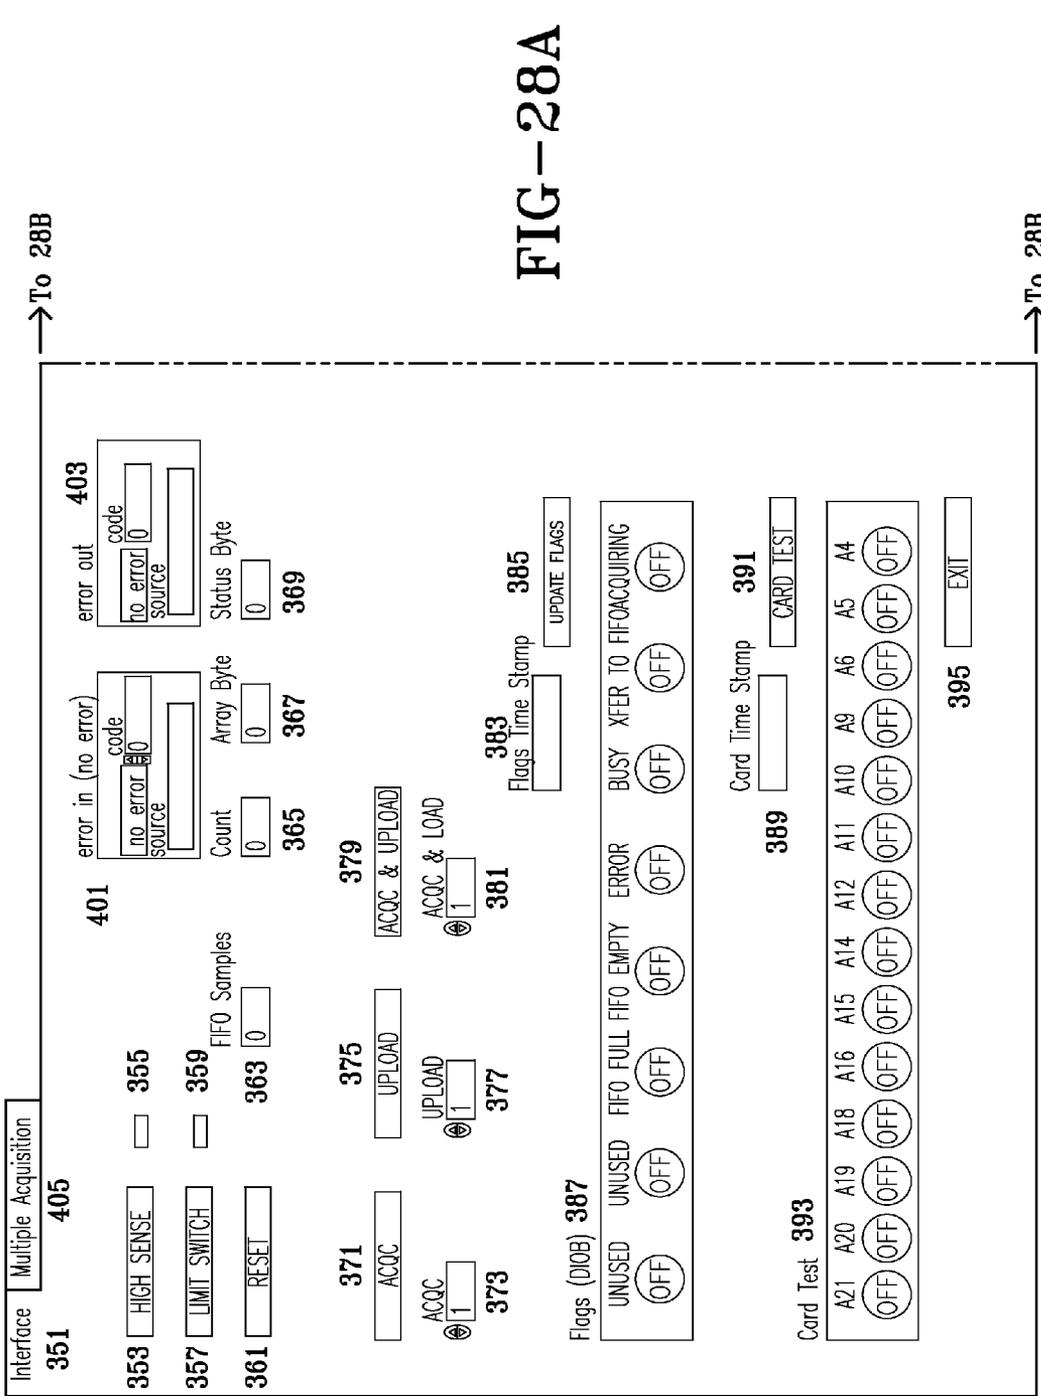


FIG-28A

→ To 28B

→ To 28B



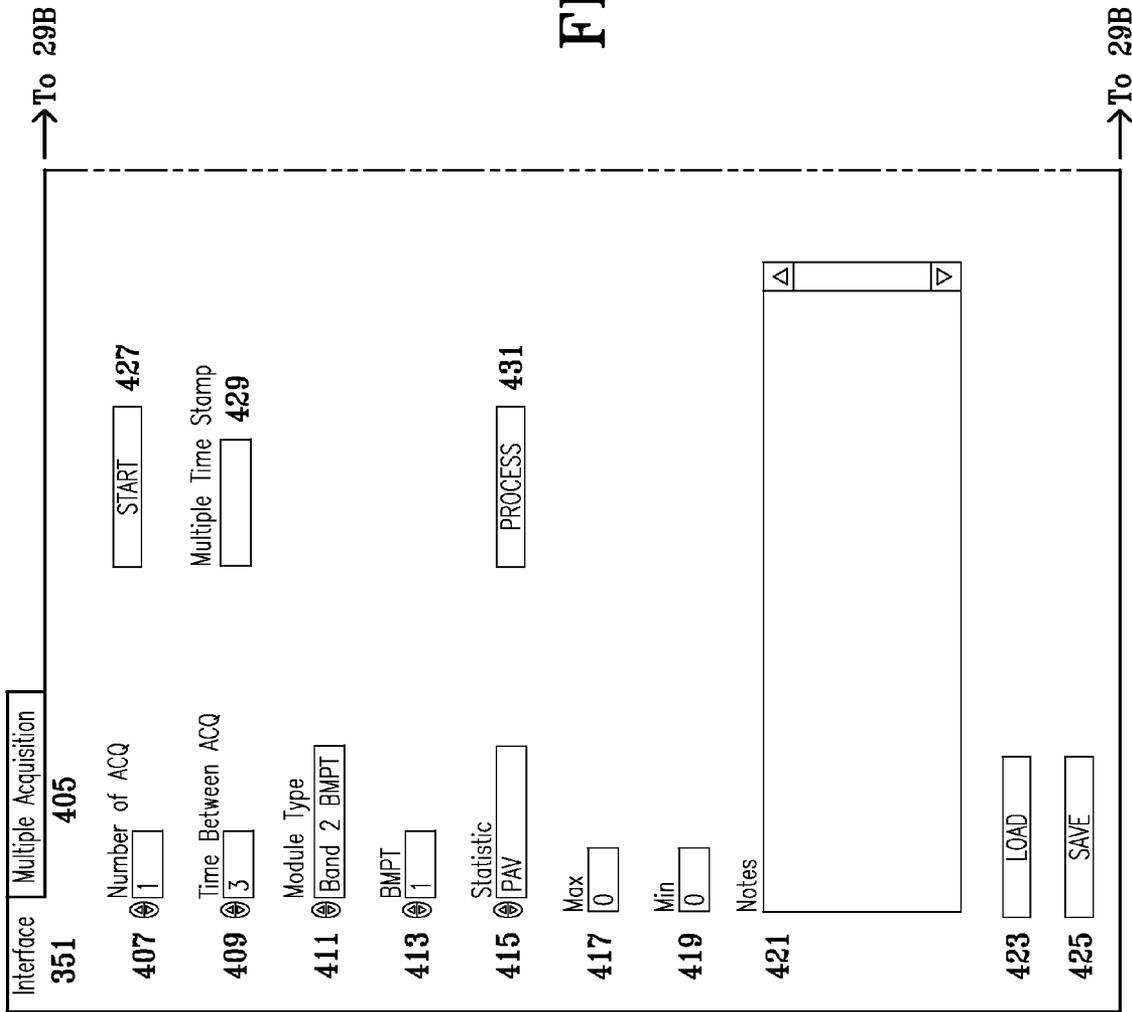



FIG-29A



→To 30B

# FIG-30A

→To 30B

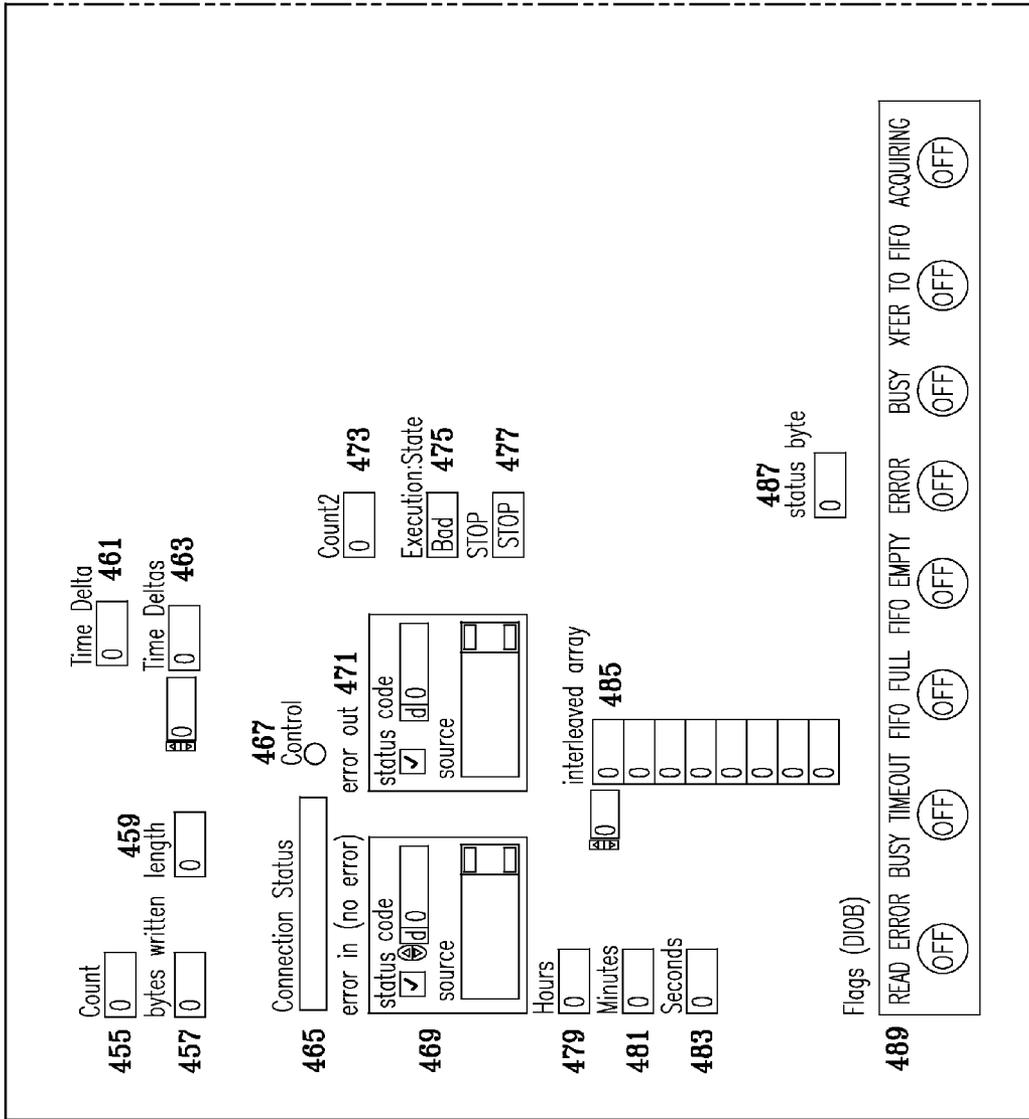

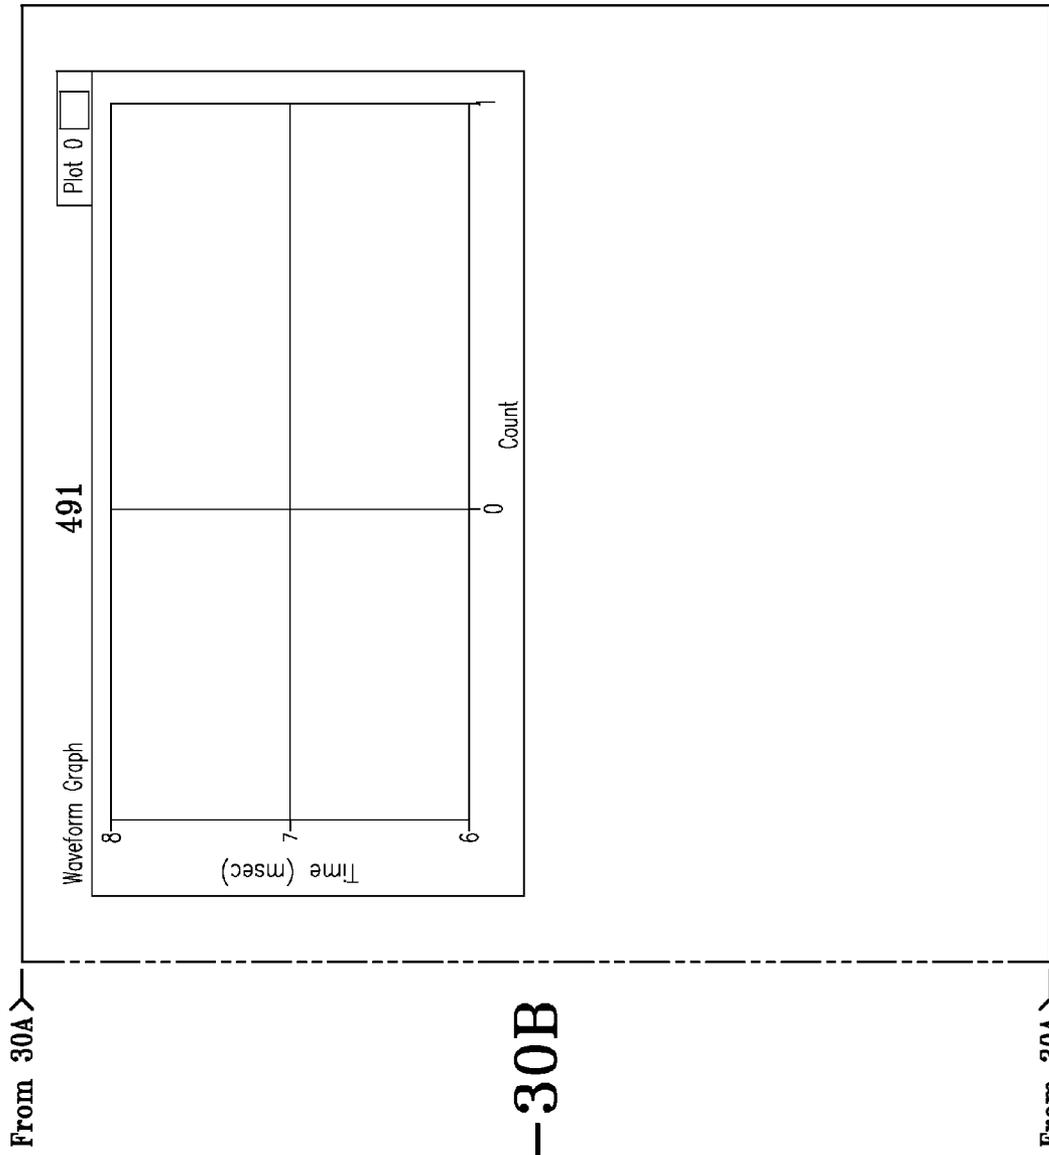


FIG-30B

→ To 31B

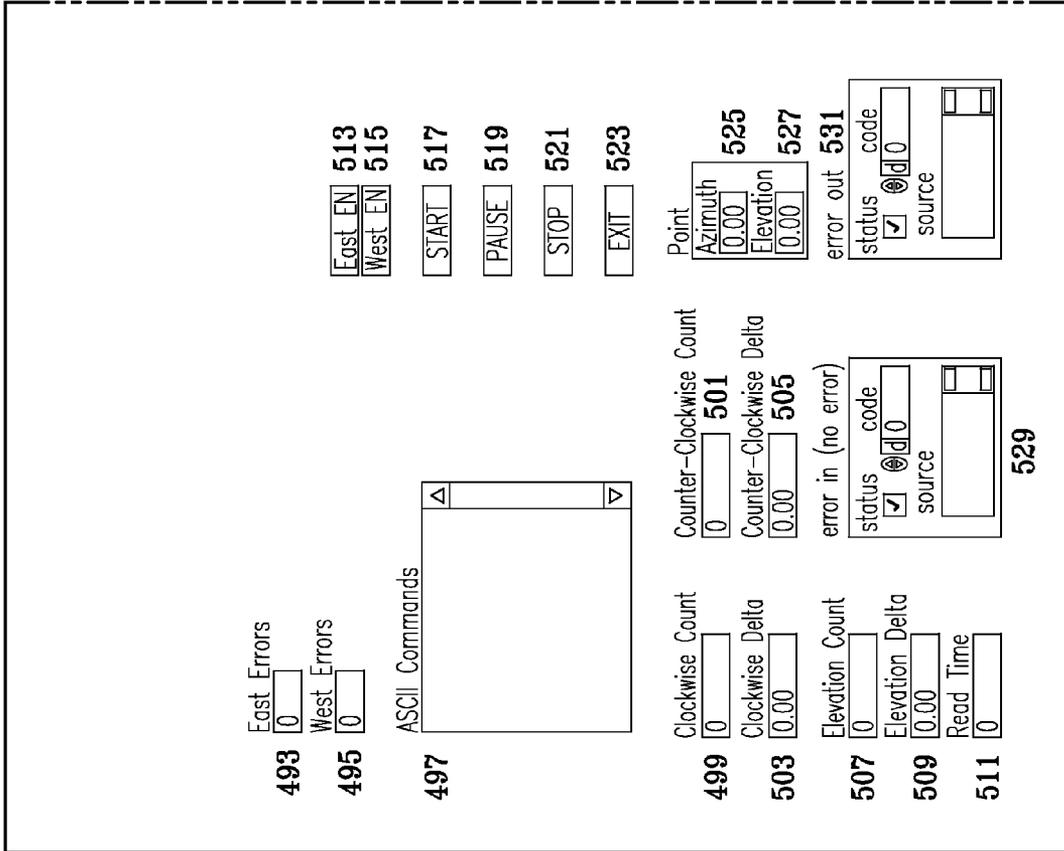


FIG-31A

→ To 31B

Header Info		Settings	Graphs	533
535				
From 31A >		INIT HEADER		
539	Test Name	537		
541	Date			
543	Test Personnel			
545	Notes			
547	Operational Program			Operational REV6
549	Source Antenna			Source Antenna
551	Victim Antenna			ANT_1
553	Channels			
555	Modulation			
557	Data Rate			
559	Settings Comments			

FIG-31B

From 31A >

From 31A >


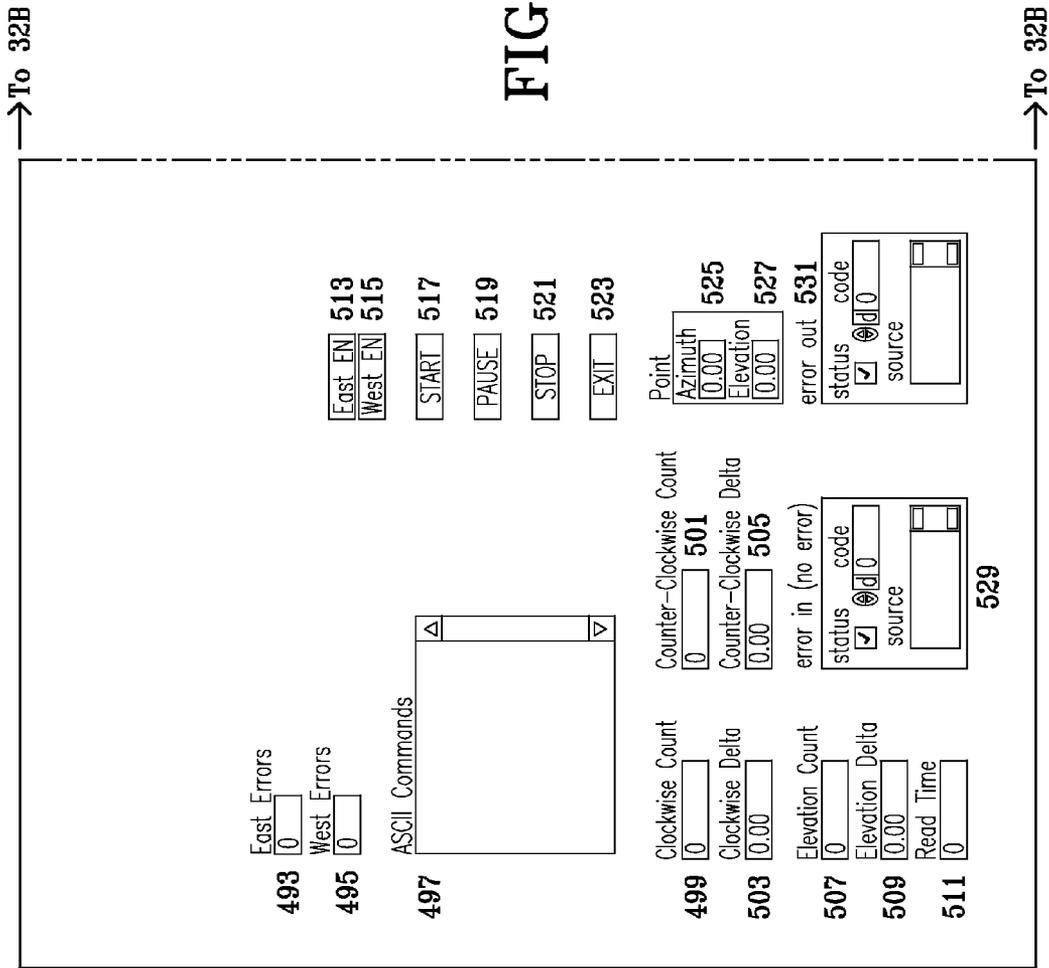


FIG-32A

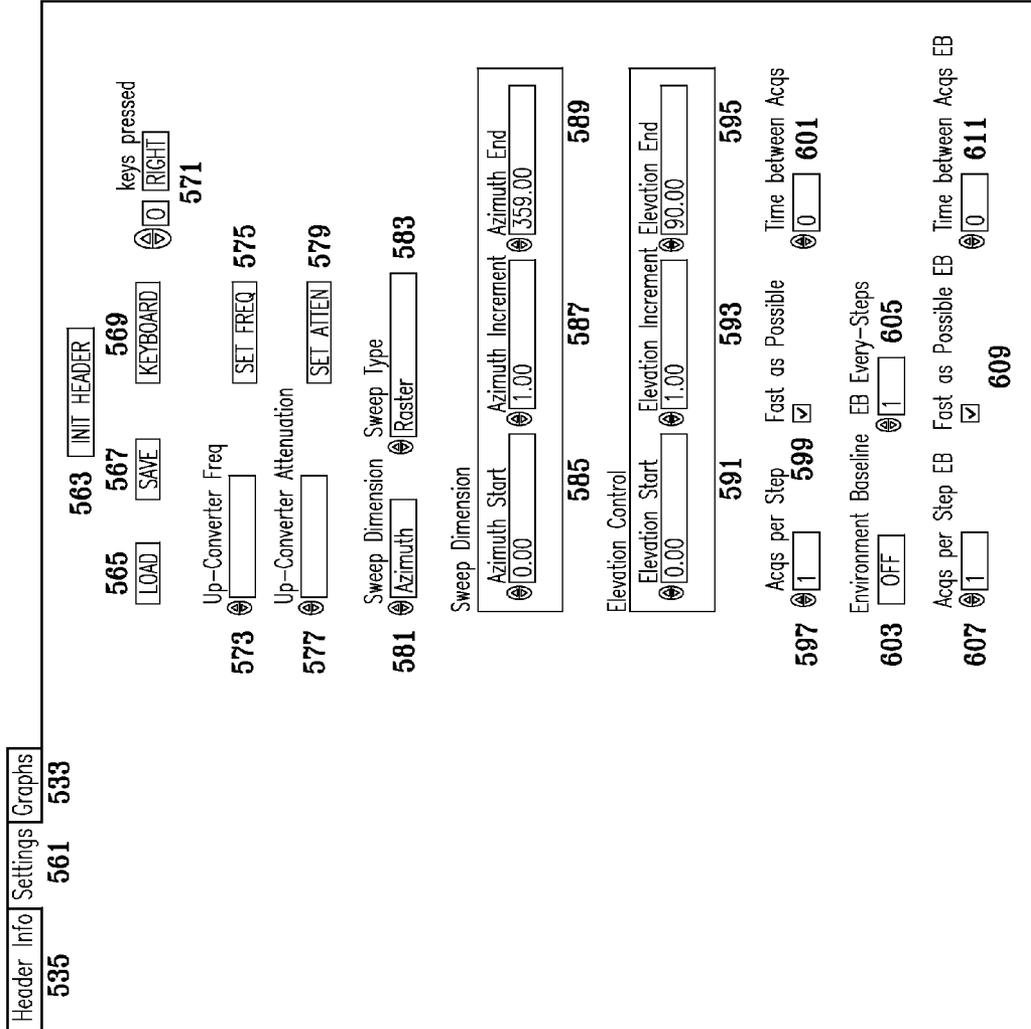

From 32A

FIG-32B

From 32A

→ To 33B

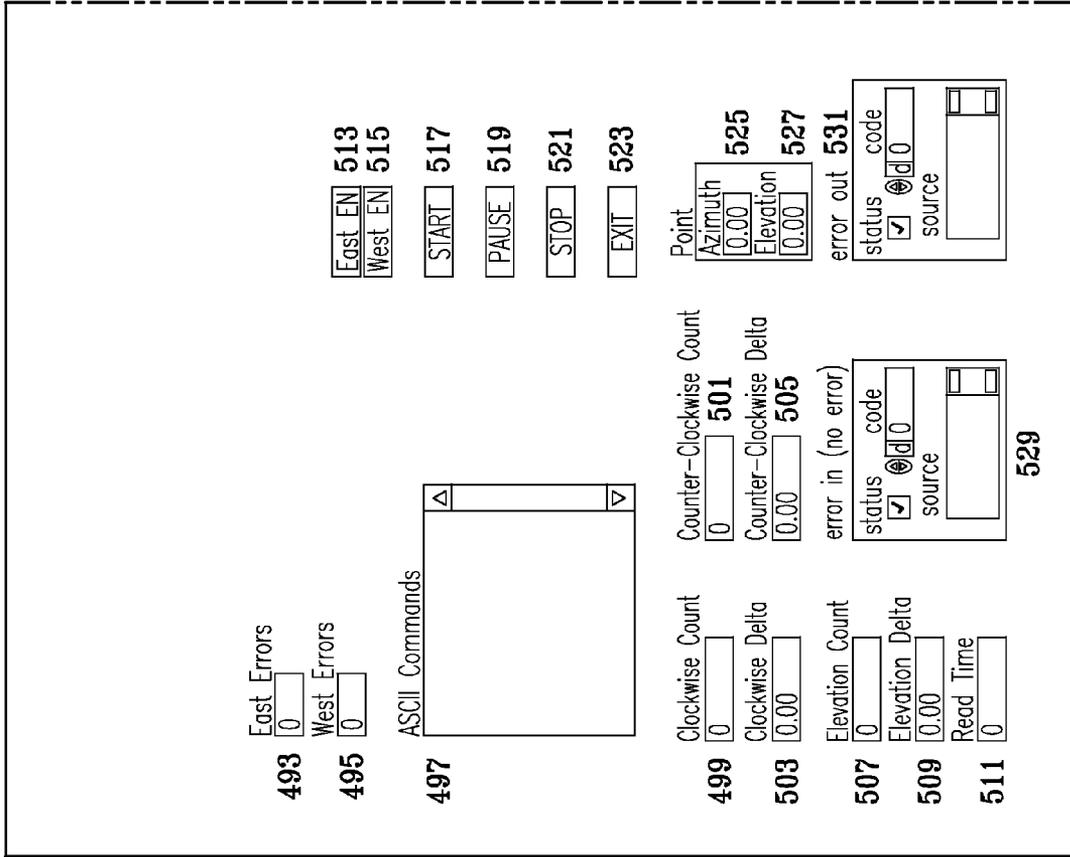


FIG-33A

→ To 33B

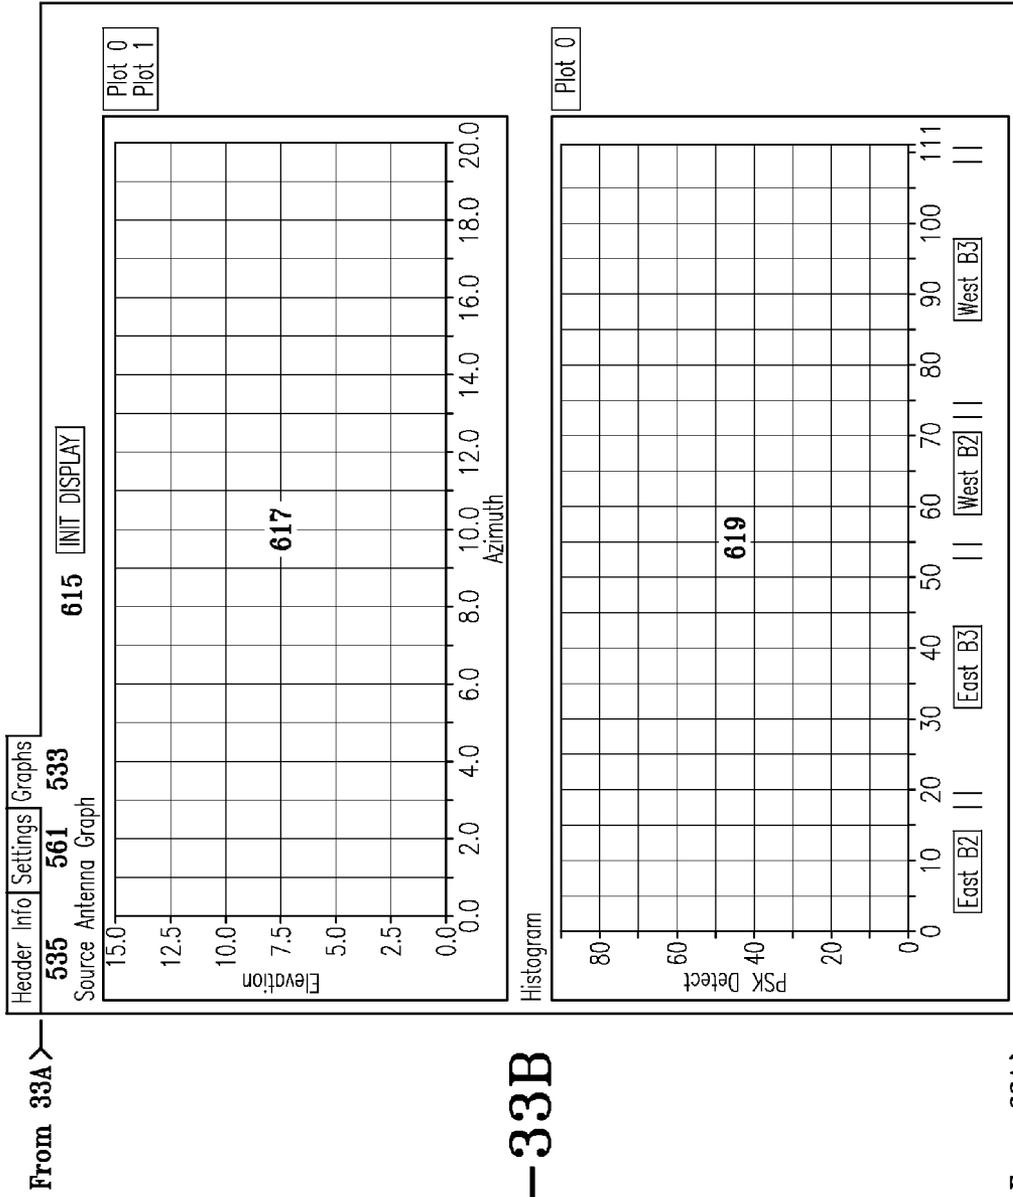



FIG-33B

→ To 34B

Control Panel		Header/Settings 1		Header/Settings 2		Percent Filtered	
621	623	625	627				
629	631	633	635				
ANT1 EAST	ANT1 WEST	ANT1 EEB	ANT1 WEB				
637	639	641	643				
ANT2 EAST	ANT2 WEST	ANT2 EEB	ANT2 WEB				
645		647	649				
OPEN FILES		RE-CALCULATE	STOP				
Watts In		Threshold dBm	Power Factor dBm				
651	653	655	657				
0	0	0	0				
Watts Out		Acqs per Step	Power Factor EB				
657	659	661					
0	0	0					
NORMALIZE		CALC STATS	COLOR MAP				
663	665	667	671				
OFF	OFF	OFF	Power (GN-YL-RD)				
HF Radio Cutouts		669					
665	667	669					
OFF	OFF	OFF					
PIC							
667	673	675	677	679			
OFF	ANT 1	DATA TYPE	STAT MODE	BMP#			
673	675	677	679				
ANT 1	TEST	MAX DF VALUE	1				
RF RECEIVER SELECT		BAND	STATISTIC	ACQ#			
681	683	685	687				
EAST DF ONLY	BAND 3	POWER	1				

→ To 34B


FIG-34A

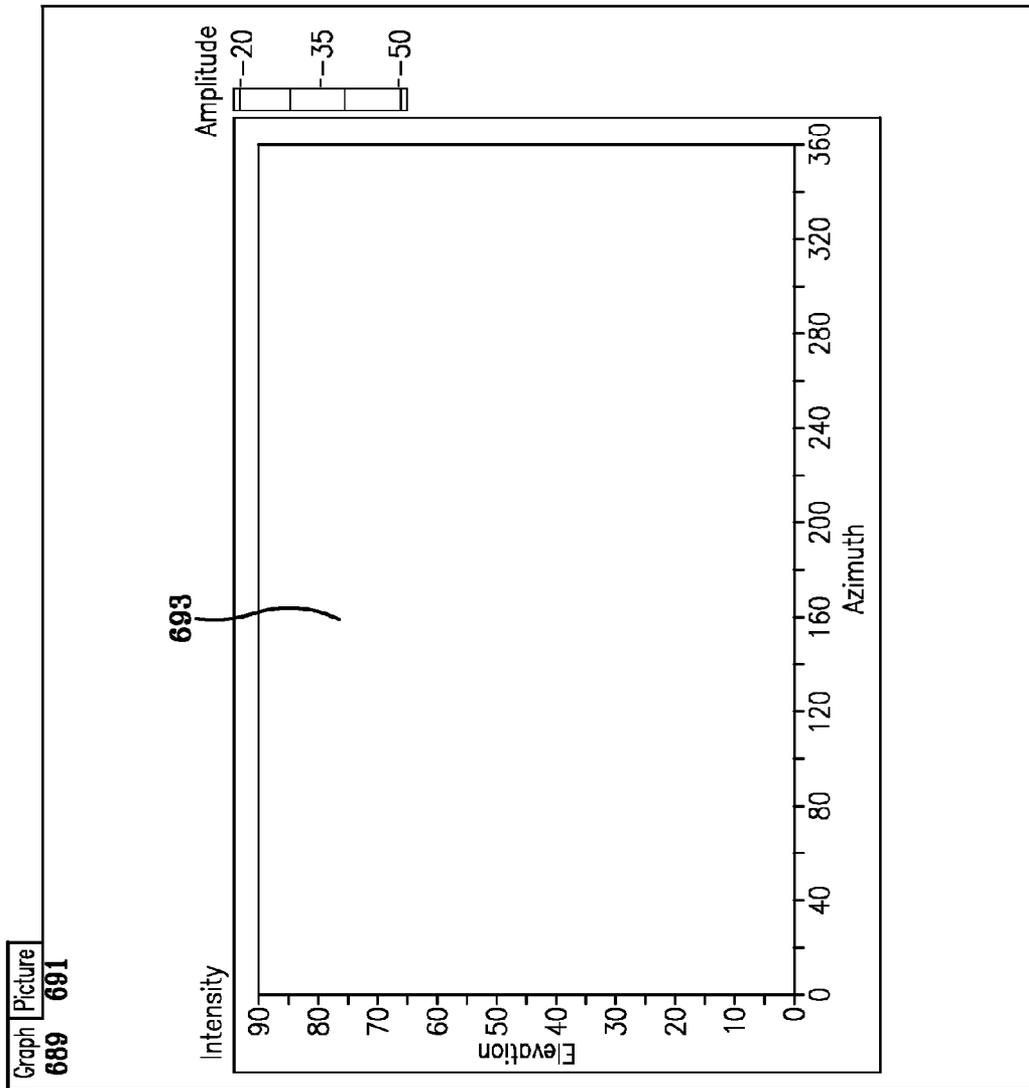


From 34A

FIG-34B

From 34A

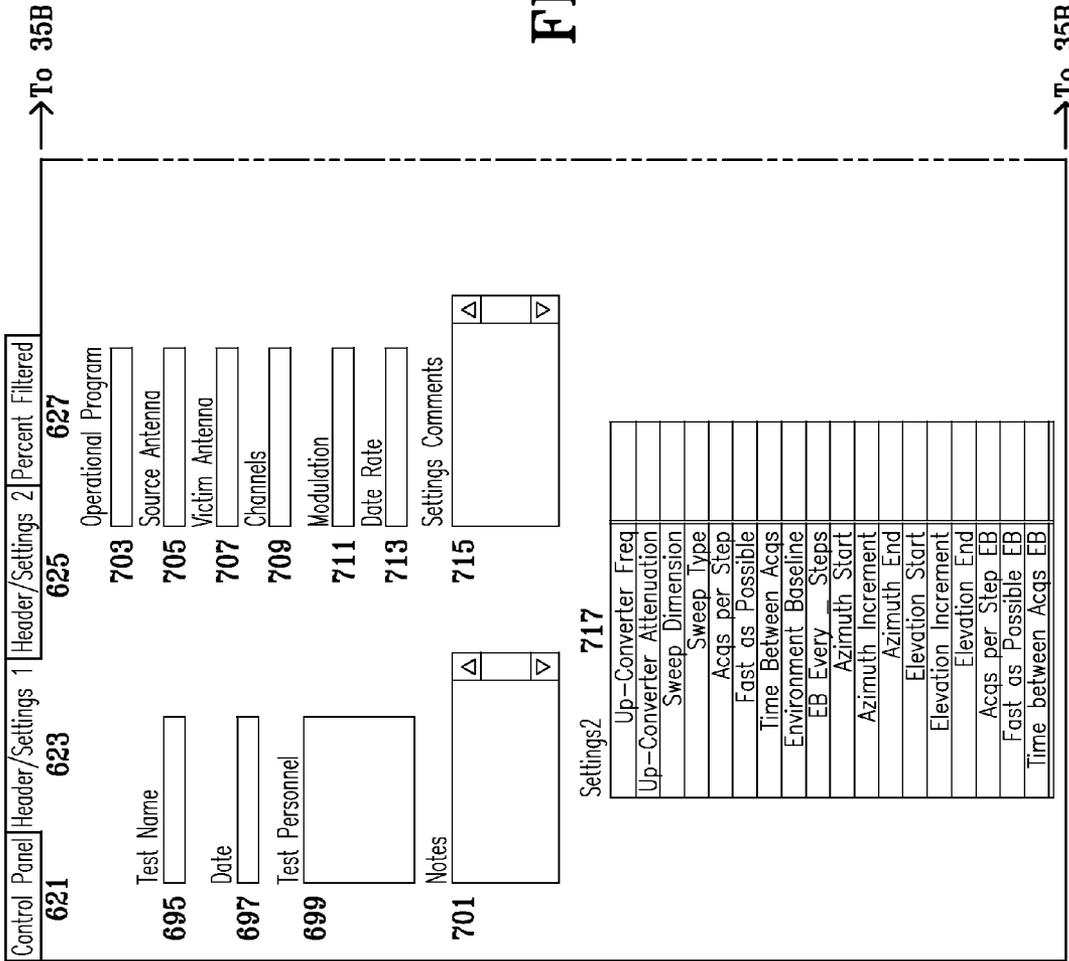

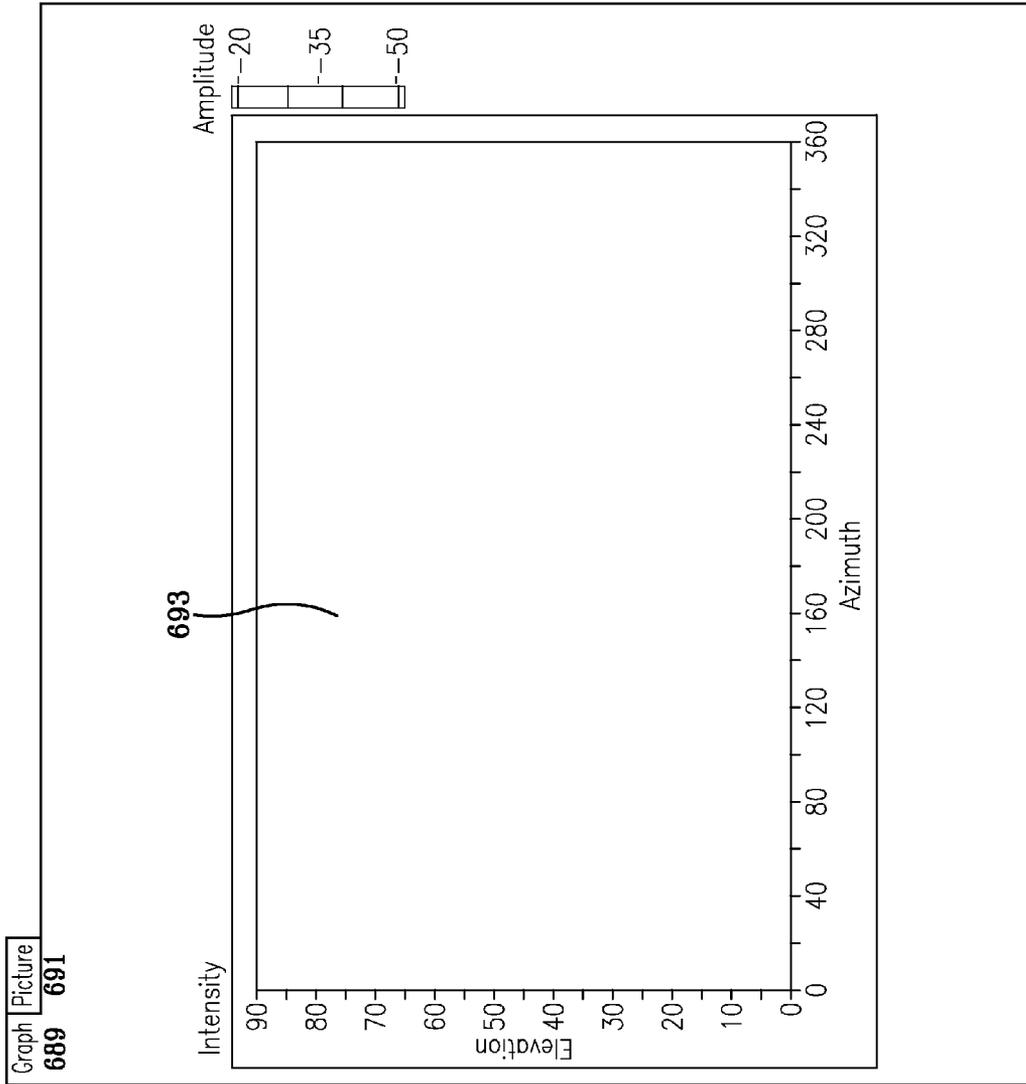

From 35A >

FIG-35B

From 35A >


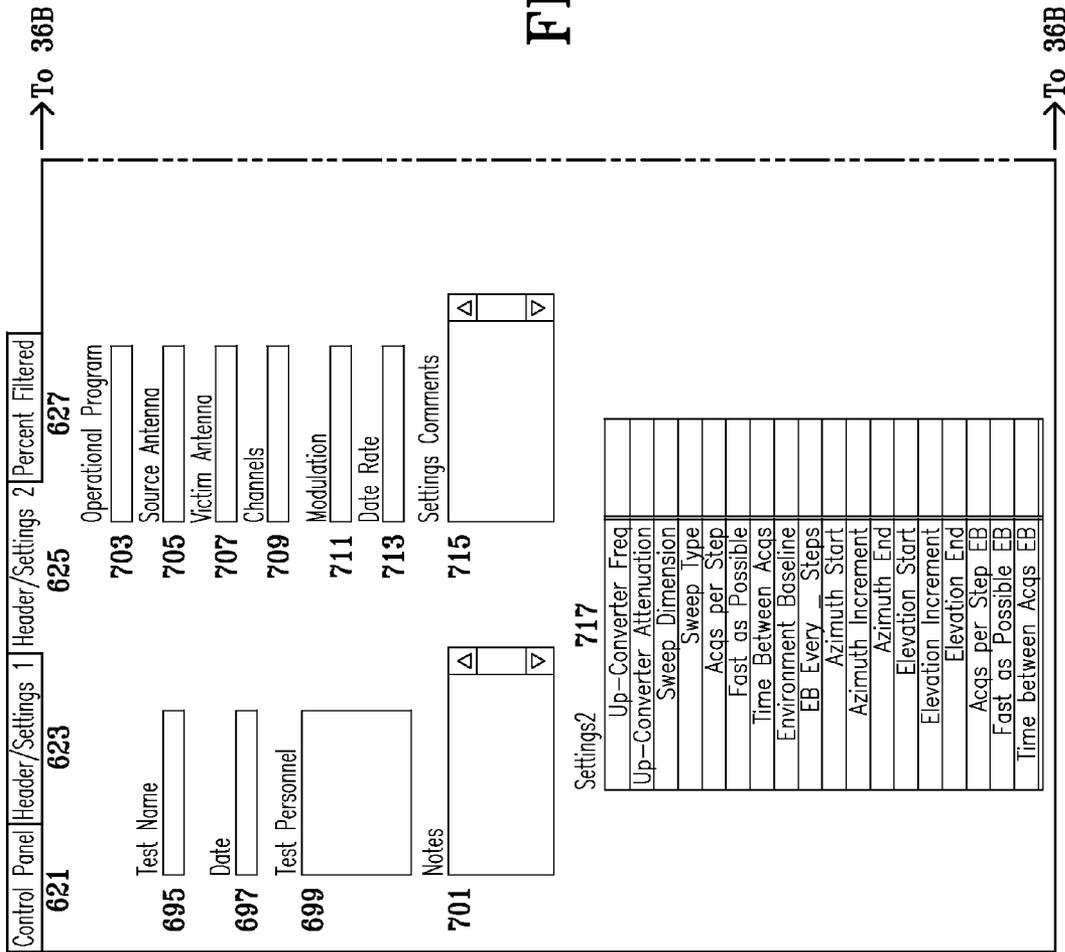


FIG-36A

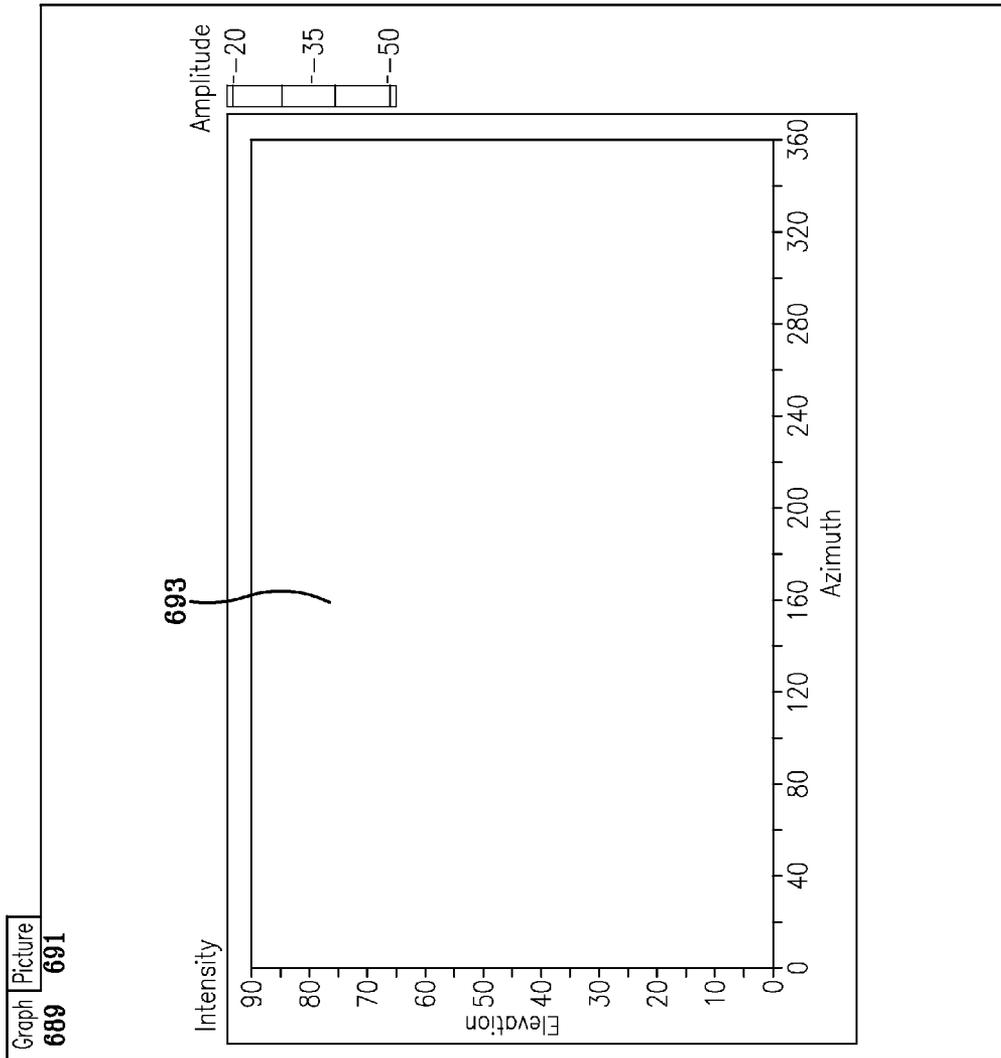


Graph Picture  
689 691

From 36A >

FIG-36B

From 36A >



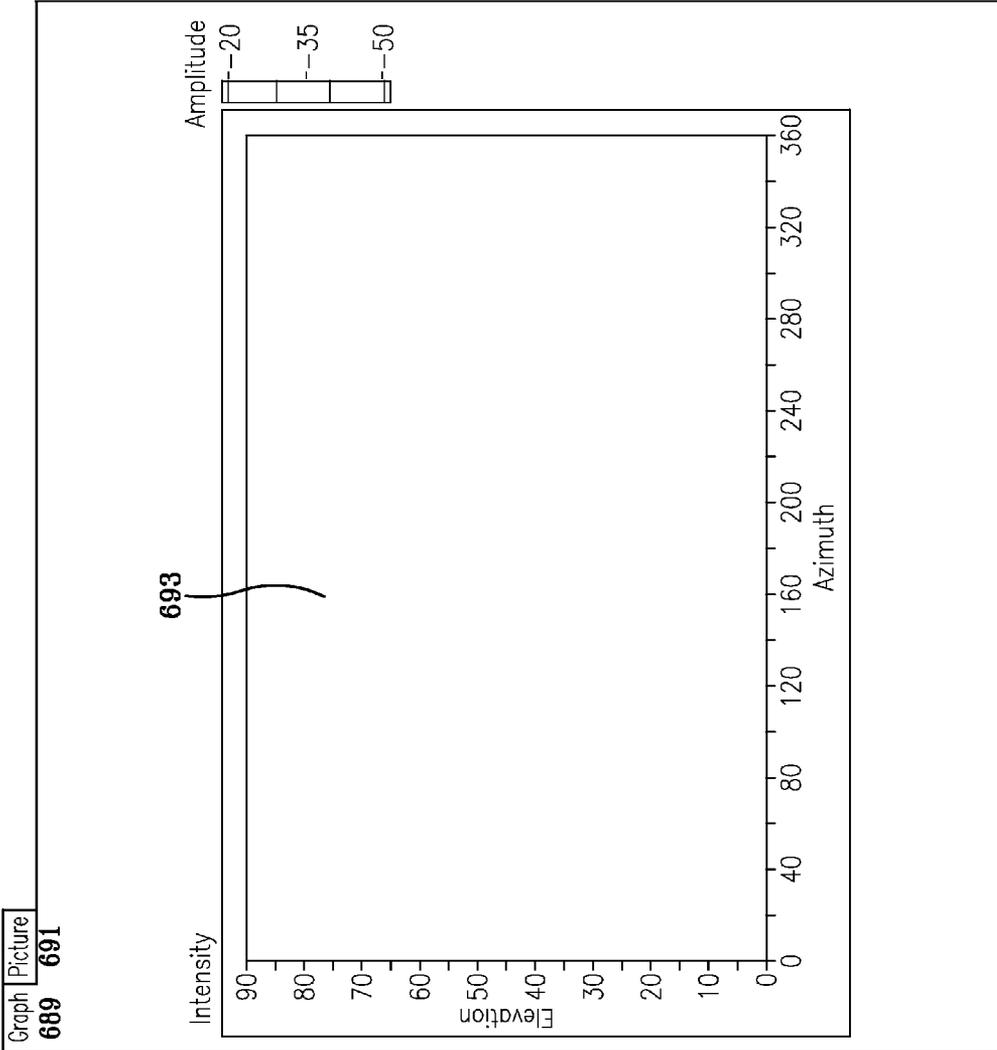

Graph Picture  
689 691

From 37A >

FIG-37B

From 37A >


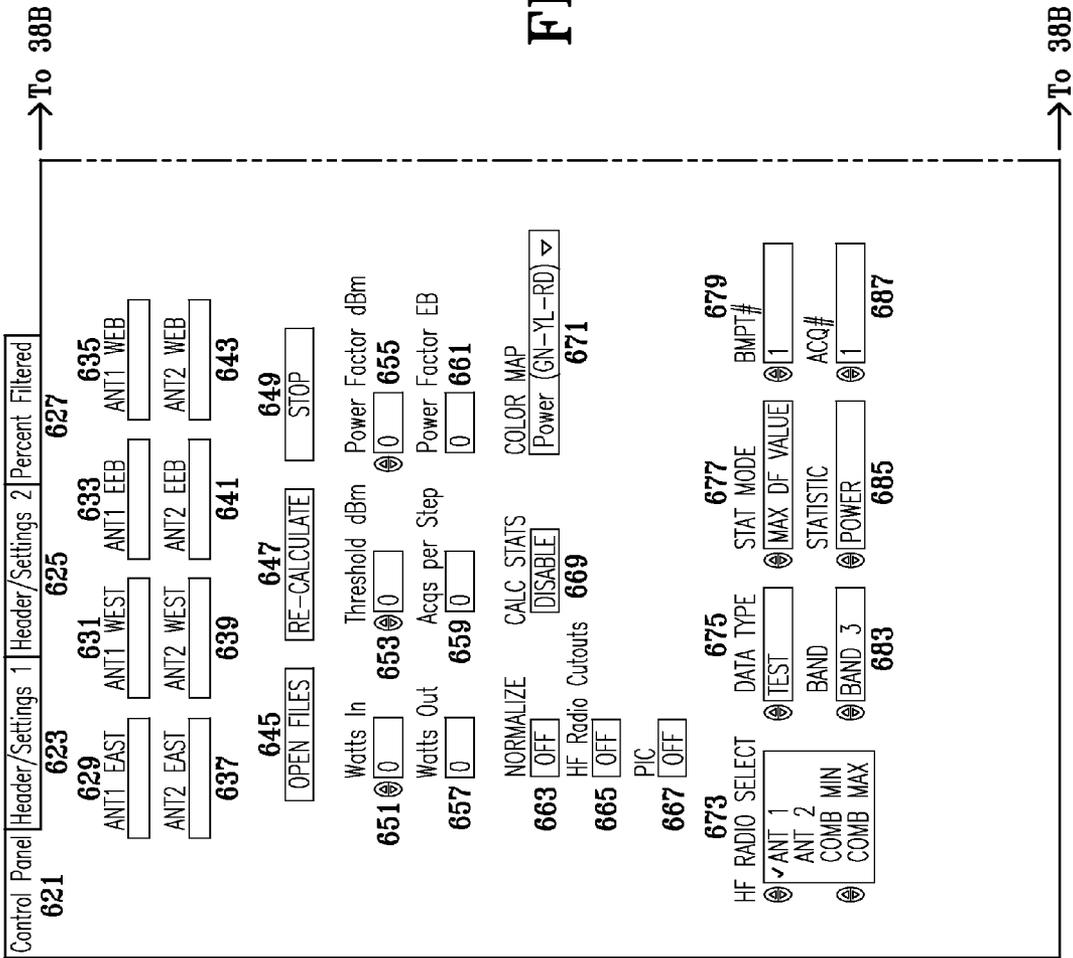


FIG-38A

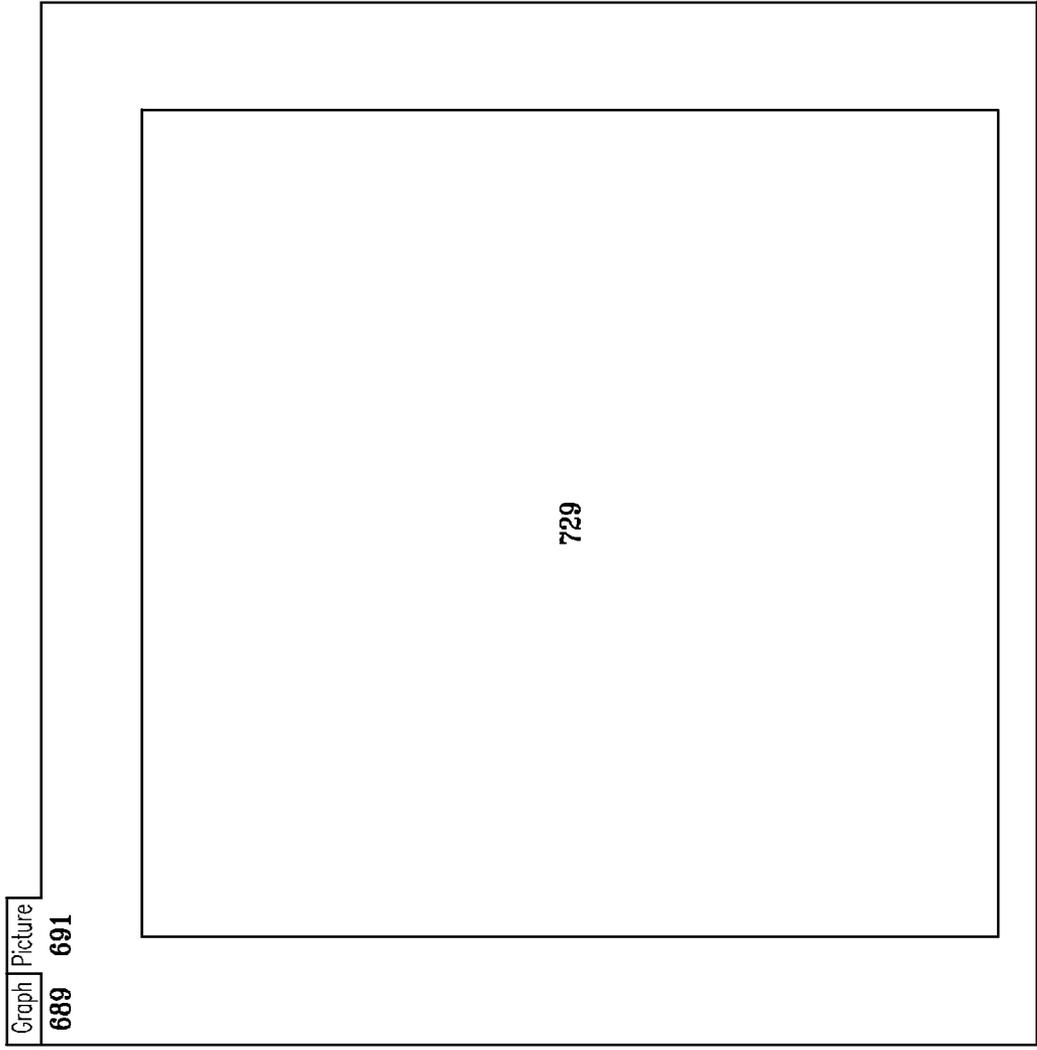

From 38A >

FIG-38B

From 38A >

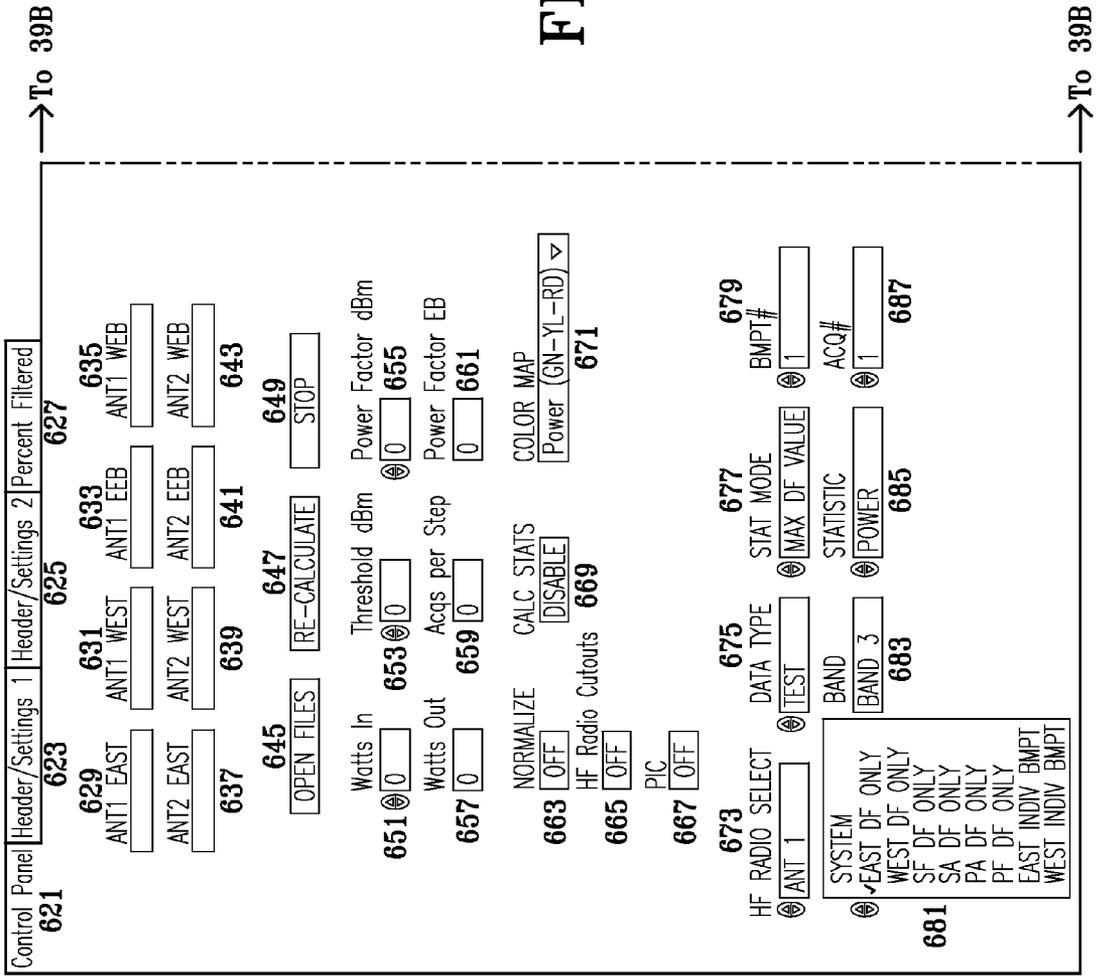


FIG-39A

→ To 39B

→ To 39B

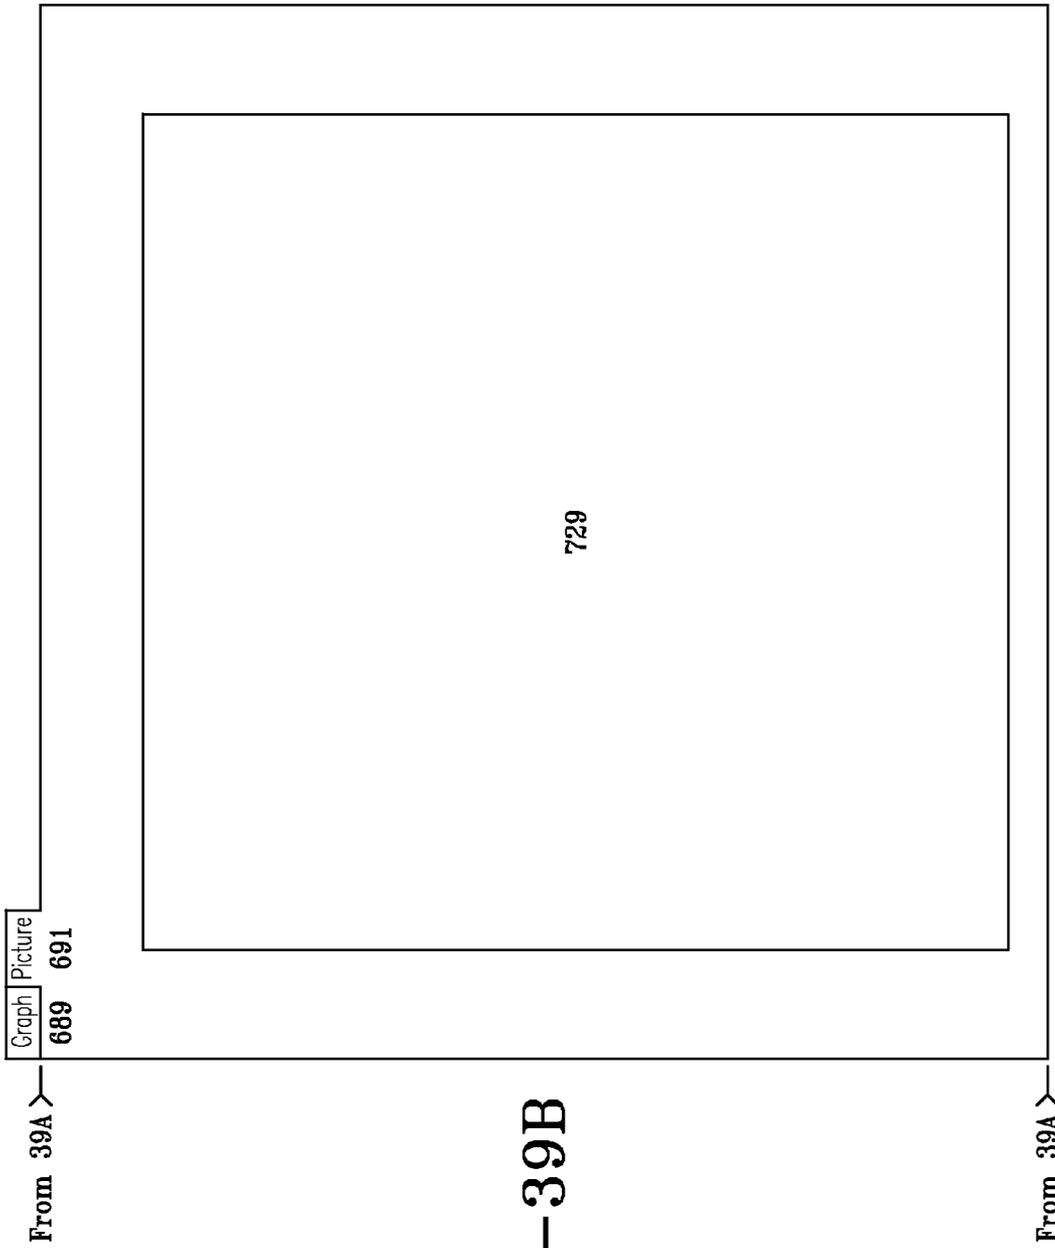


FIG-39B

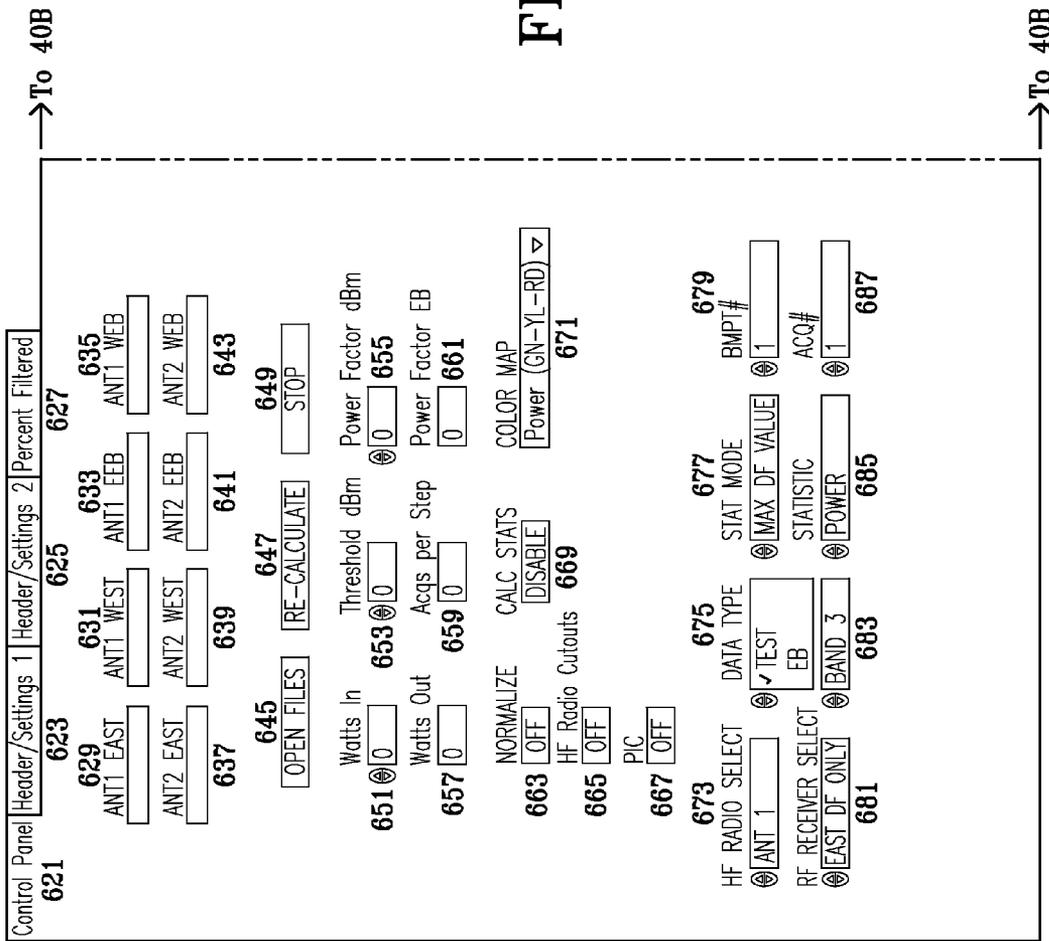


FIG-40A

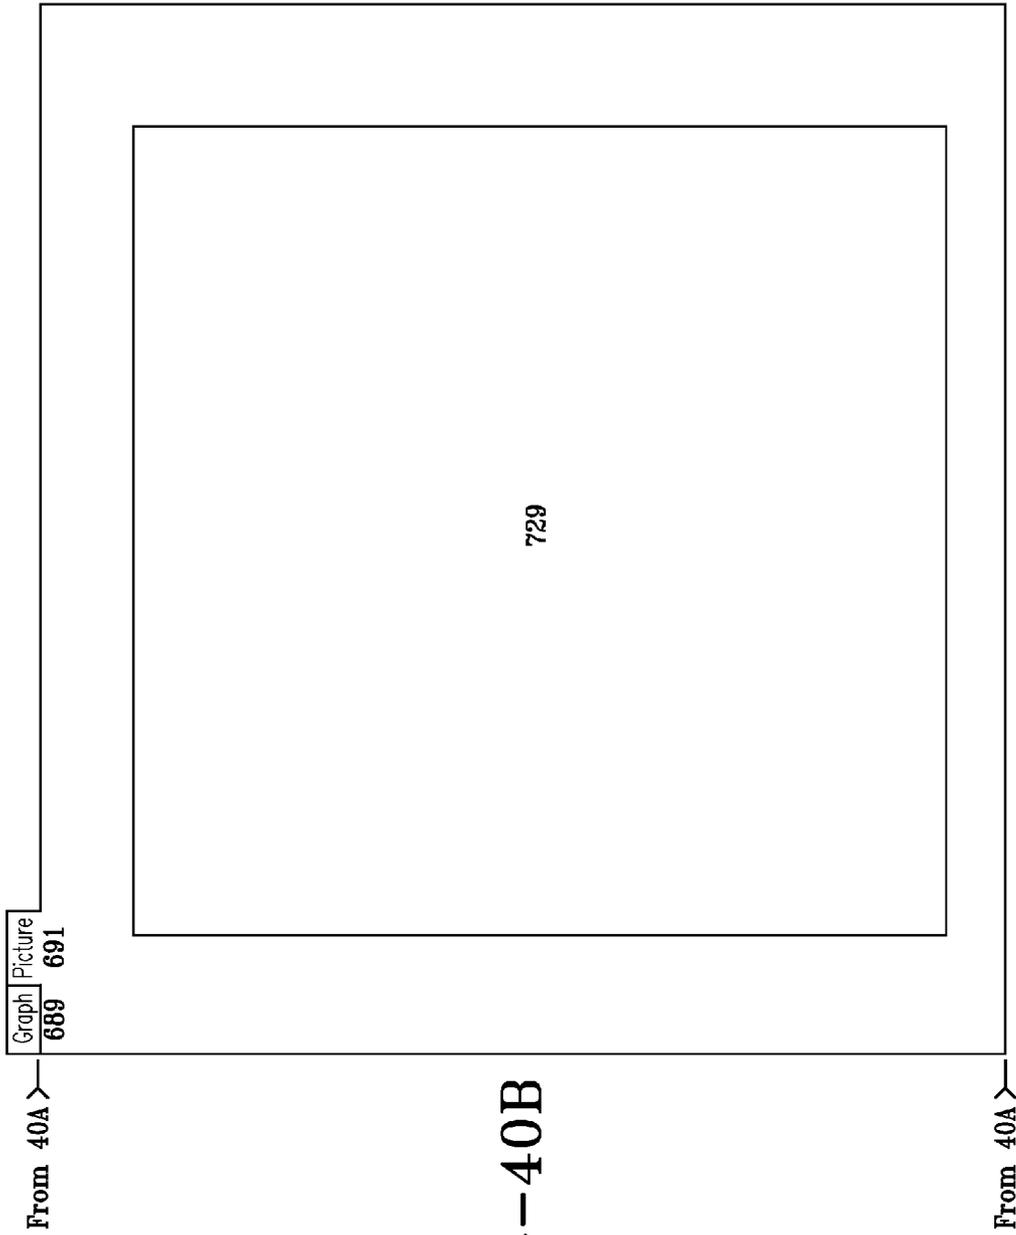


FIG-40B

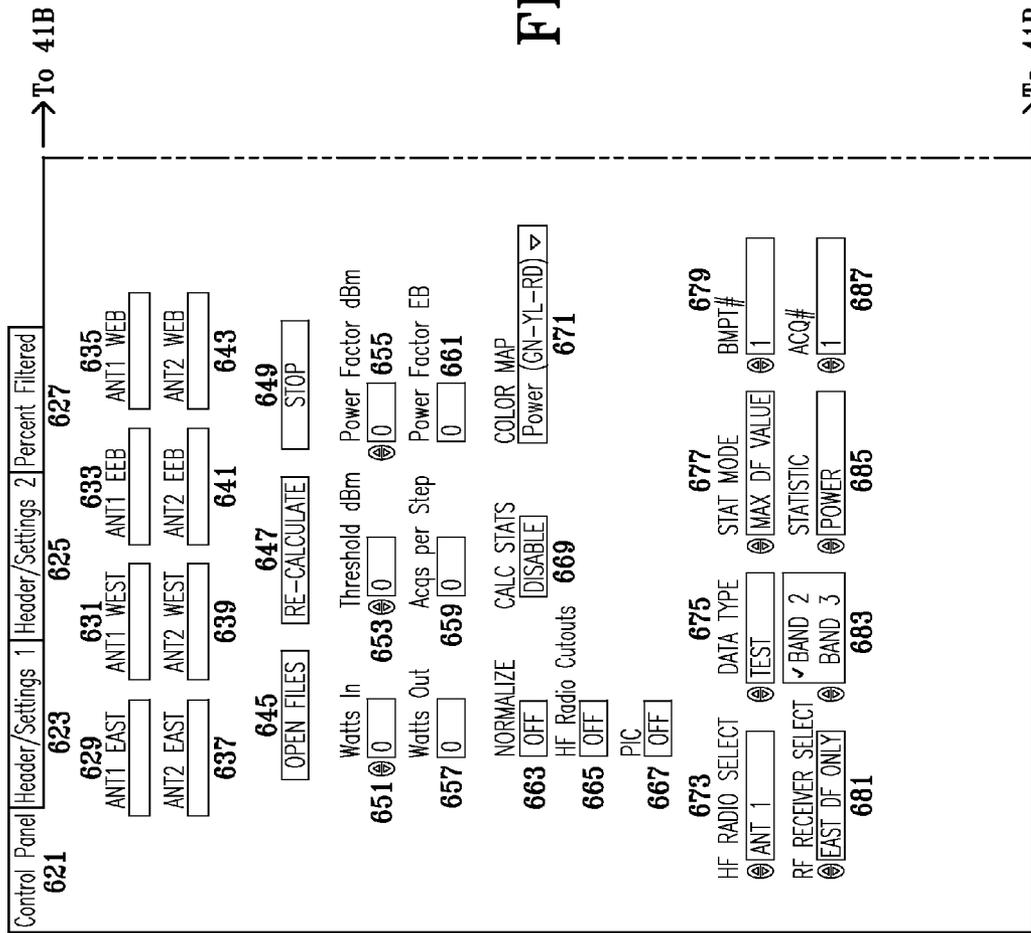


FIG-41A

→ To 41B

→ To 41B

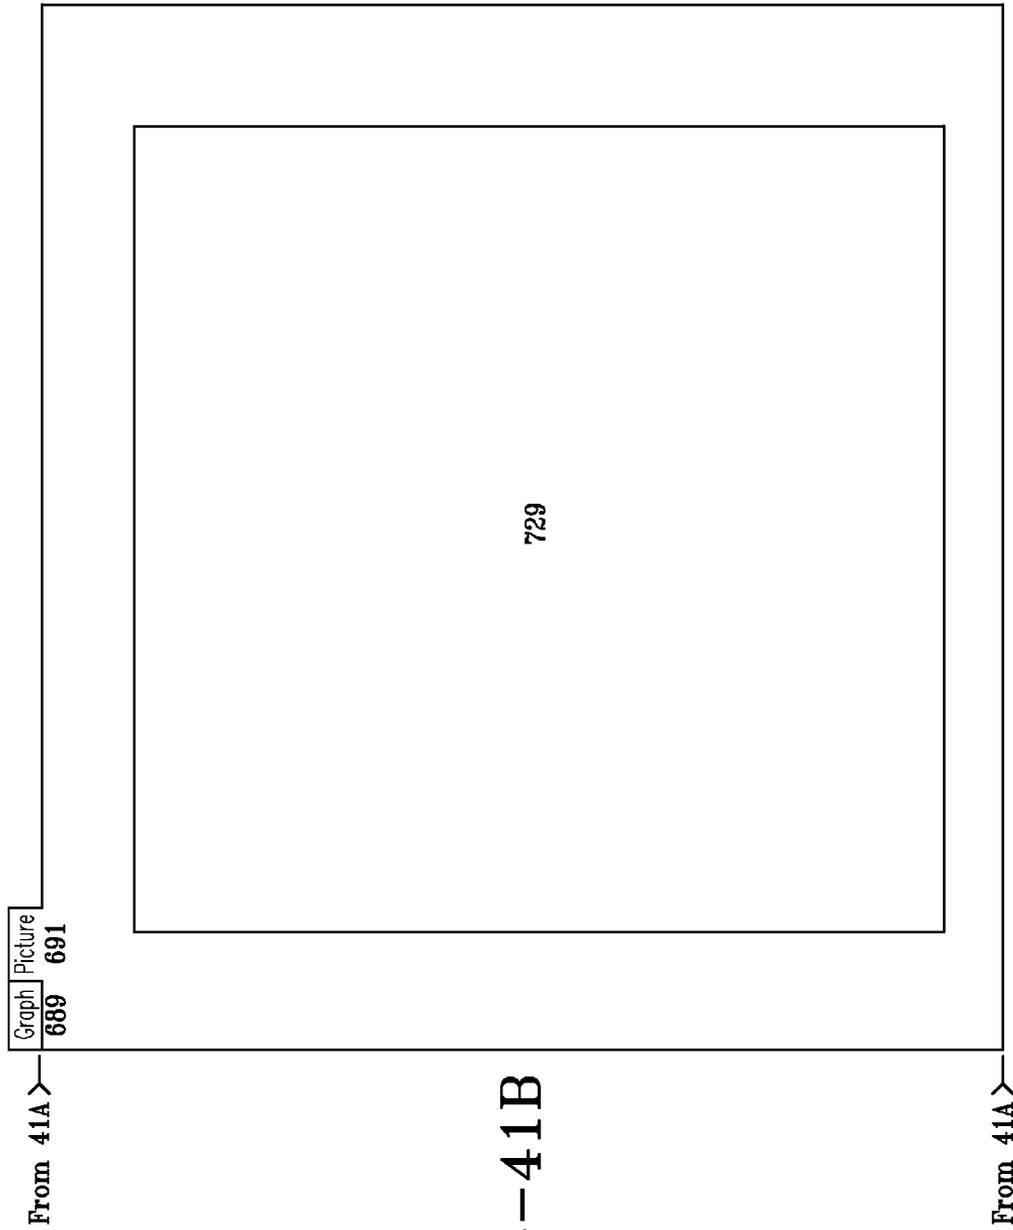


FIG-41B

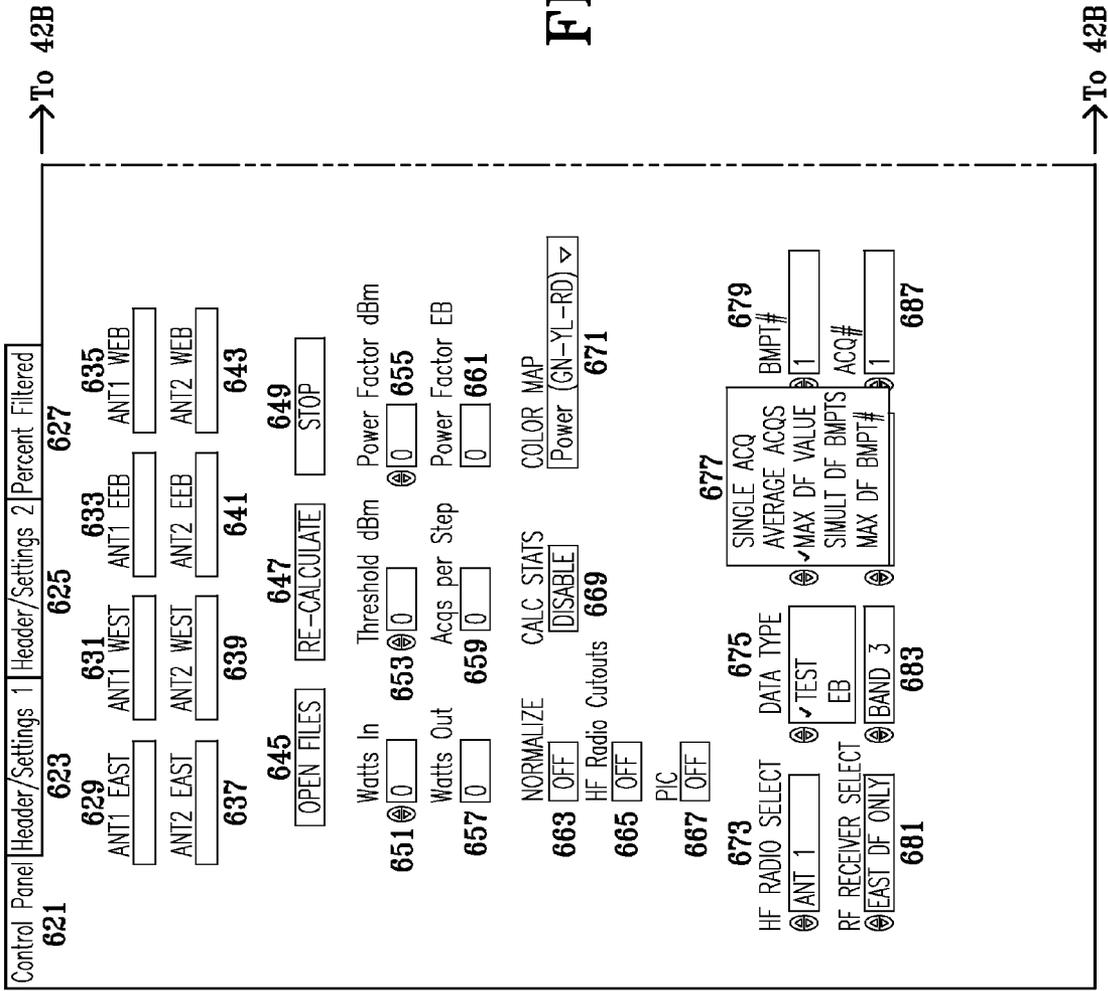


FIG-42A

→ To 42B

→ To 42B



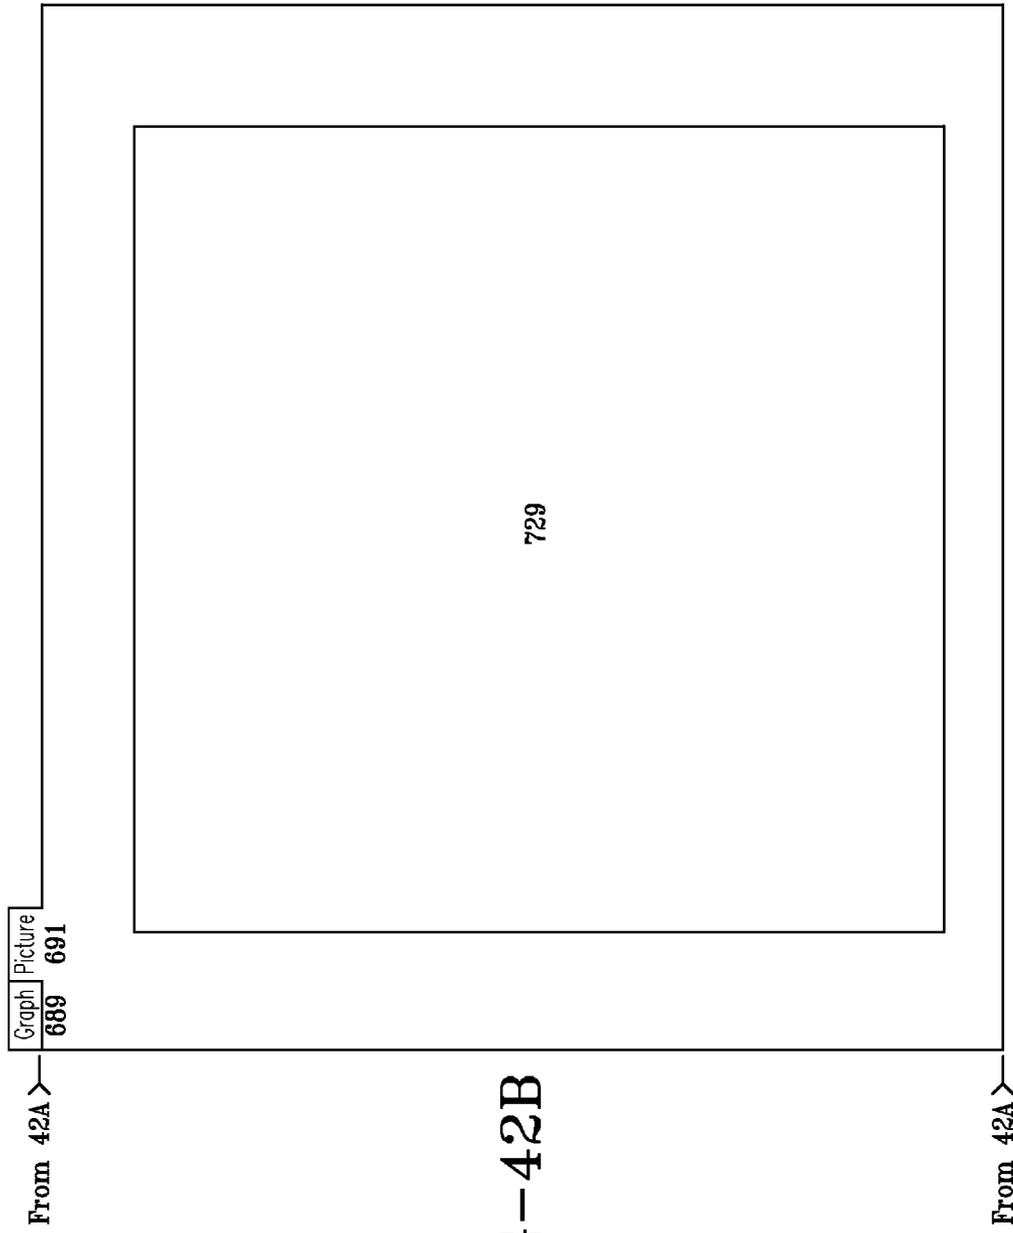


FIG-42B

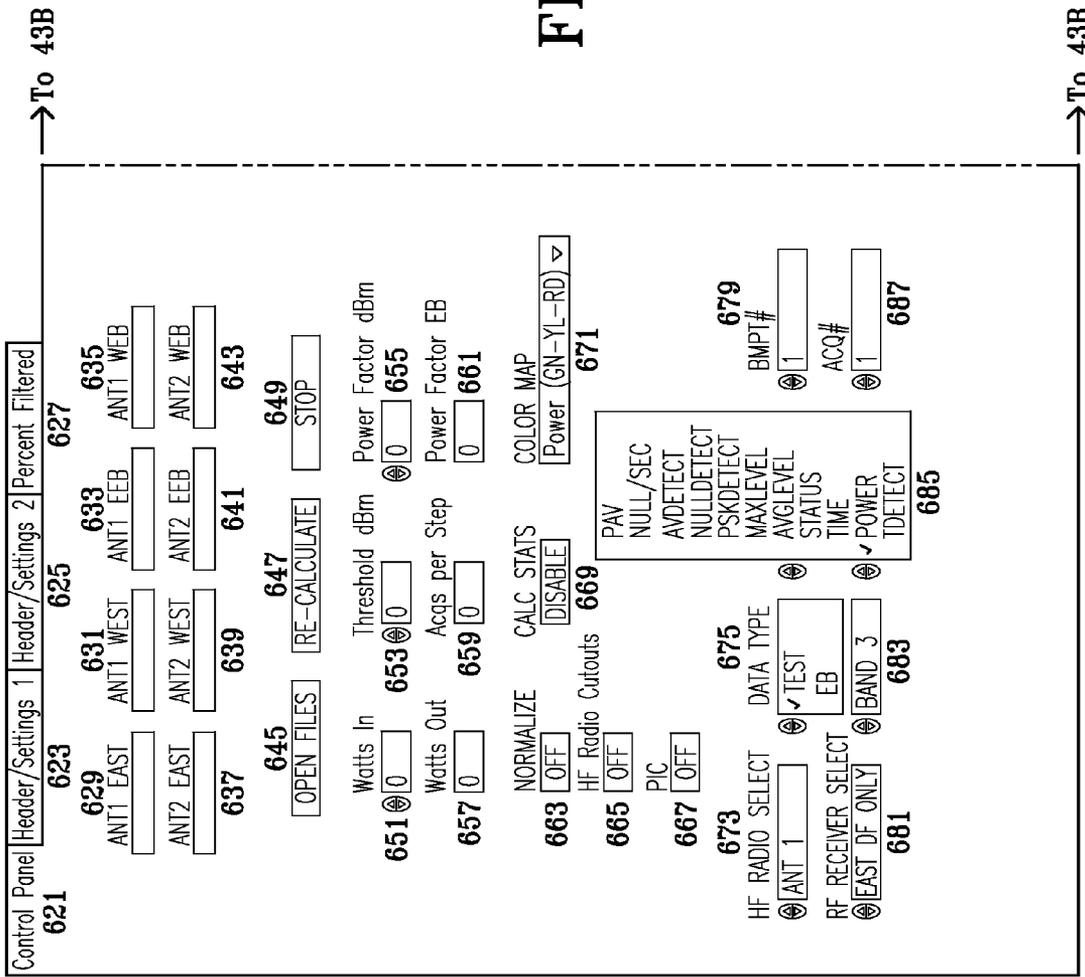

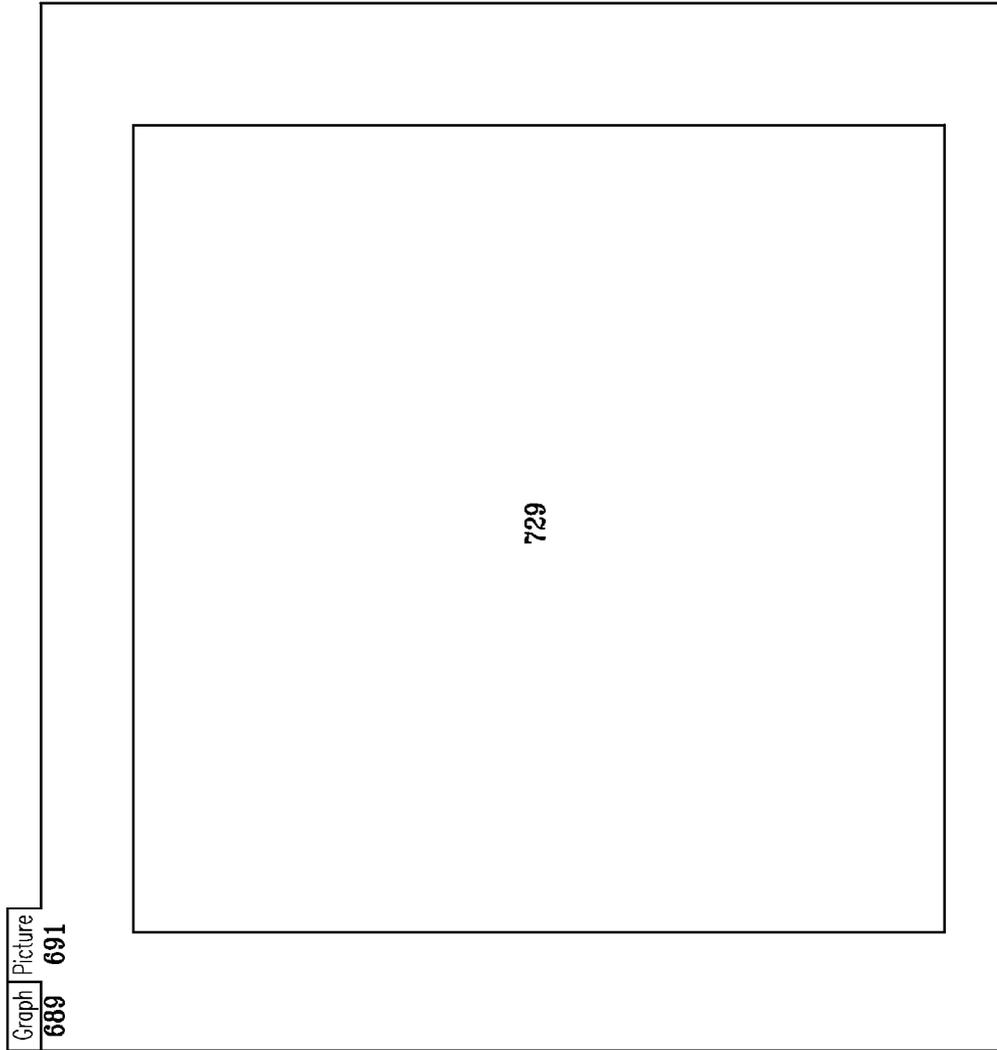

From 43A >

FIG-43B

From 43A >


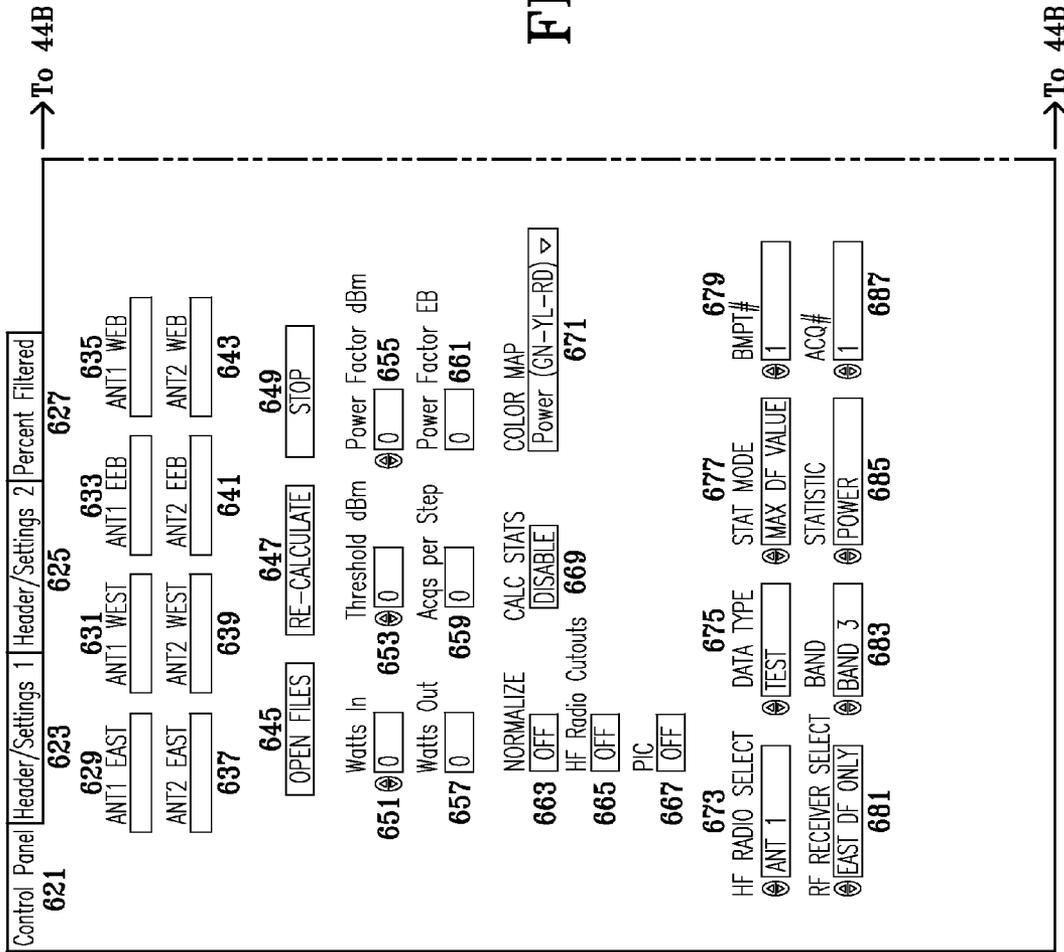


FIG-44A

→ To 44B

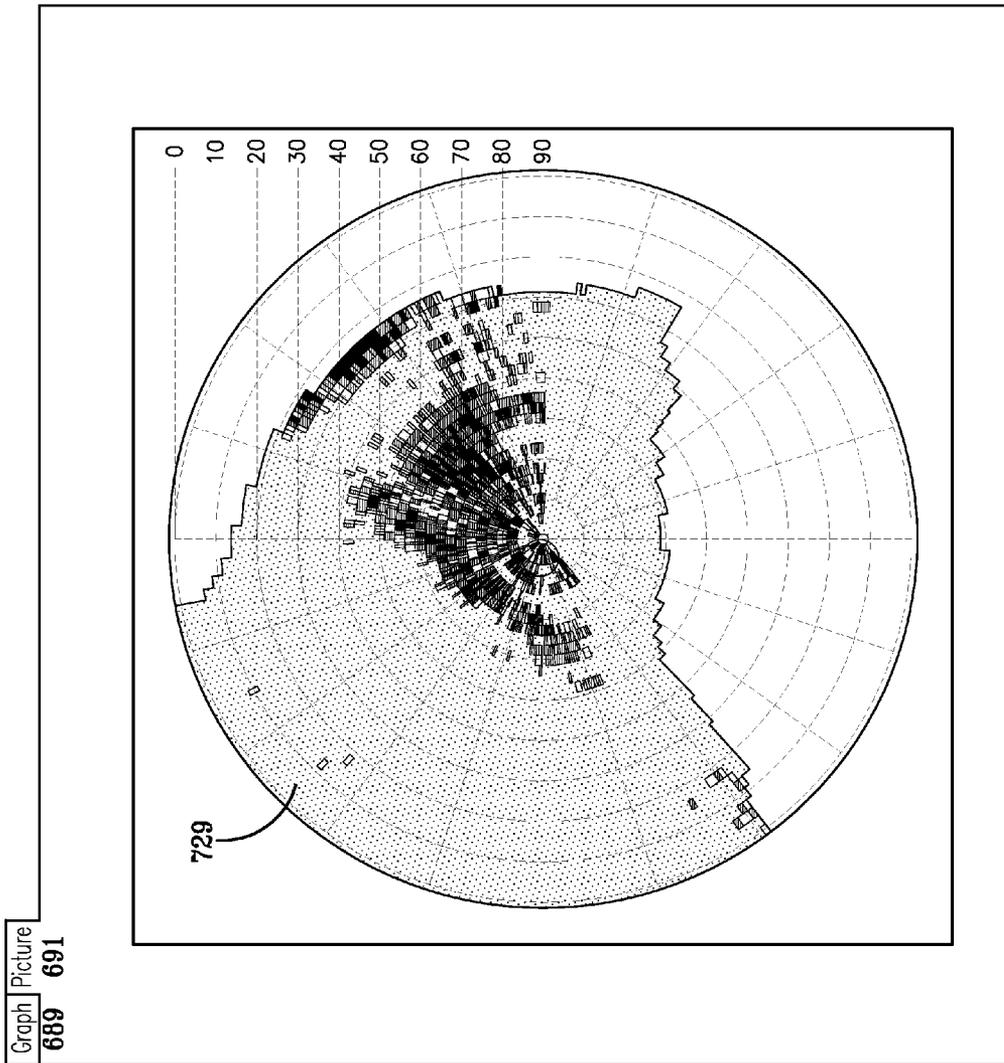


Graph Picture  
689 691

From 44A >

FIG-44B


From 44A >

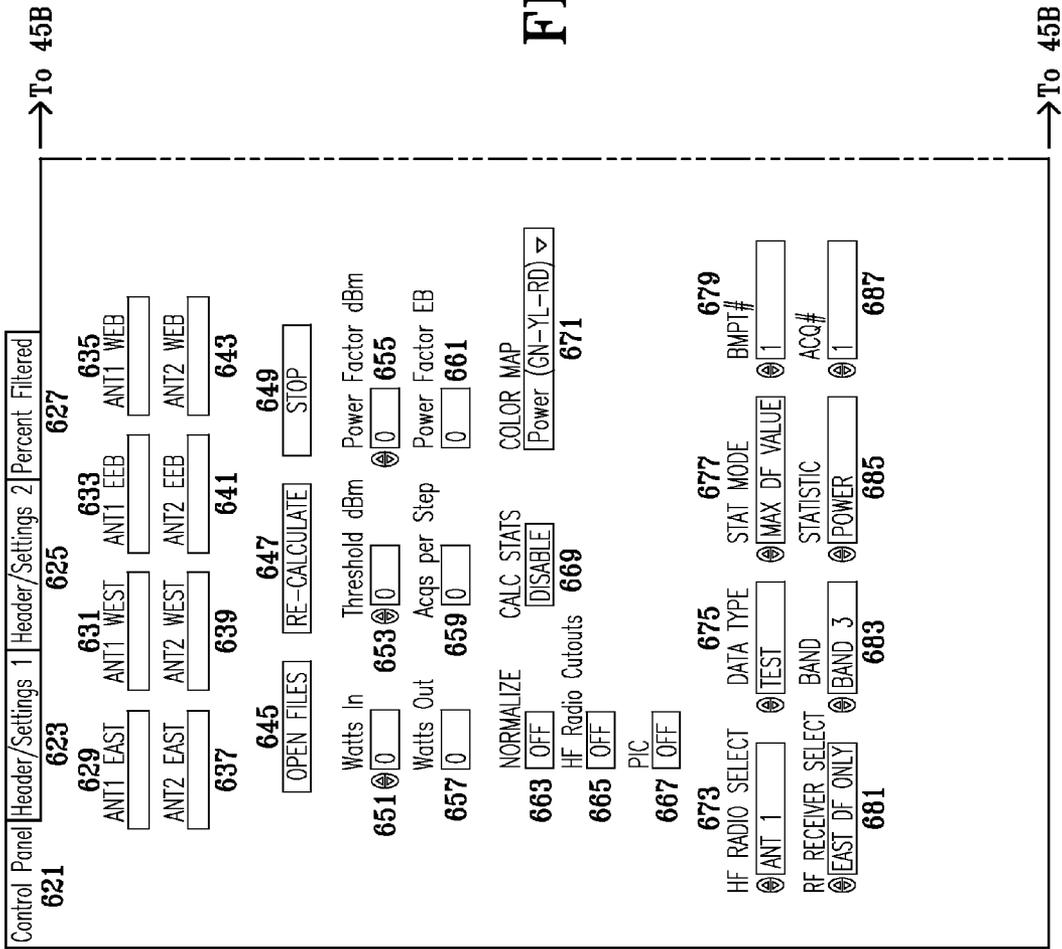

→ To 45B

FIG-45A

→ To 45B

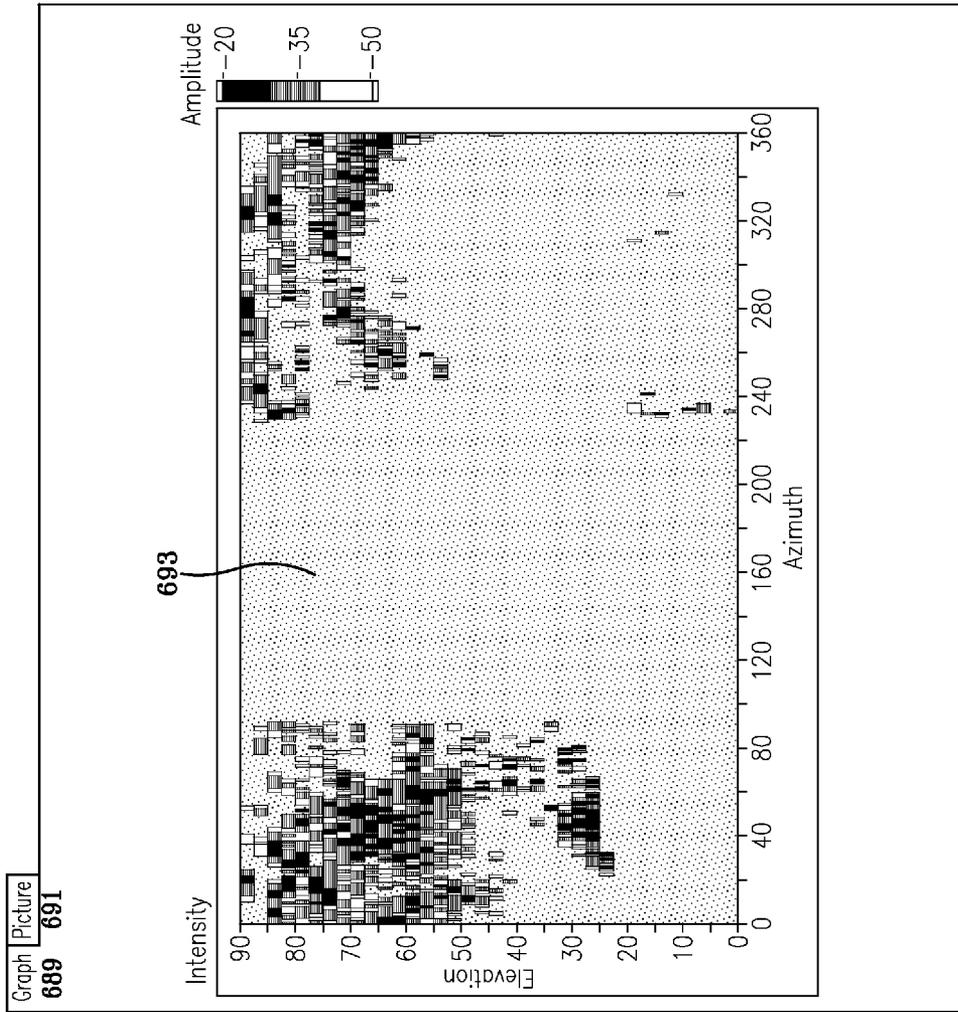

Graph Picture  
689 691

From 45A >

From 45A >

FIG-45B

1

## IDENTIFICATION OF TARGET SIGNALS IN RADIO FREQUENCY PULSED ENVIRONMENTS

### CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation application of, and claims priority to, U.S. patent application Ser. No. 12/211,483 filed Sep. 16, 2008, titled IDENTIFICATION OF TARGET SIGNALS IN RADIO FREQUENCY PULSED ENVIRONMENTS, which is a continuation-in-part application of U.S. patent application Ser. No. 11/900,141 filed Aug. 31, 2007, titled IDENTIFICATION OF TARGET SIGNALS IN RADIO FREQUENCY PULSED ENVIRONMENTS, both applications being expressly incorporated by reference herein in their entirety.

### STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

The invention described herein was made in the performance of official duties by an employee of the Department of the Navy and may be manufactured, used, licensed by or for the United States Government for any governmental purpose without payment of any royalties thereon.

### FIELD OF THE DISCLOSURE

The invention relates generally to the identification or the presence of a specific type of modulated signals such as, for example, phase modulation. In particular, the invention includes a system and method of using signal processing schemes to determine the presence of modulated signals and to correlate the intensity of the signals with the orientation of a signal source.

### BACKGROUND

Many applications use crystal video receivers (CVR), diode detector circuits or other circuits that simply create a signal, commonly called video, that represents the power level of the received signal. Such receiver circuitry is commonly used to process radio frequency (RF) pulse signals because of its simplicity and low cost. These receivers have difficulty yielding meaningful results when dealing with continuous wave (CW) modulated signals. Because of this, CW modulated signals are either avoided or removed from the CVR and similar receivers reception path. Increasing use of communication systems both mobile and stationary has led to an ever changing and complex RF spectrum. Digital modulation schemes that use phase shift key (PSK) are among the most popular. Other problems in complex RF environments include coupling and electromagnetic interference. A detection system that can isolate specific target signals based on the modulation scheme of source transmitters may be used to manage electromagnetic interference (EMI) in a complex RF environment.

### SUMMARY

A system and method to detect target signals in a first plurality of signals is disclosed herein. In one embodiment, the detection system comprises an interface portion adapted to receive a second plurality of signals based upon power levels of the first plurality of signals, a memory including a first parameter value, a second parameter value and a third

2

parameter value embedded therein, and a program embedded in the memory. The program is configured to identify active video values and null values in the second plurality of signals. The active video values are relatively higher than the null values by the first parameter value. The program is also configured to determine active video values per unit time and null values per unit time. The program is further configured output an active video signal if the active video values per unit time exceed the second parameter value and a null detect signal if the null values per unit time exceed the third parameter value.

### BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other disclosed features, and the manner of attaining them, will become more apparent and will be better understood by reference to the following description of disclosed embodiments taken in conjunction with the accompanying drawings), wherein:

FIG. 1 shows a phase shift key (PSK) state diagram;

FIG. 2 shows a quadrature phase shift key (QPSK) modulation and CVR reception signals;

FIG. 3 shows a sample PSK RF signal;

FIG. 4 shows an exemplary CVR video signal;

FIG. 5 shows another representation of a signal with QPSK modulation;

FIG. 6 shows a block diagram with one exemplary embodiment of the invention;

FIG. 7 shows an exemplary method of processing signals in accordance with one embodiment of the invention;

FIG. 8 shows a functional block diagram of one embodiment of the invention;

FIGS. 9A and 9B show a block diagram of an integrated circuit according to one embodiment of the invention;

FIG. 10 shows a signals environment and an exemplary detection system;

FIG. 11 shows a portion of an exemplary detection system and a target antenna;

FIG. 12 shows a conceptual diagram of another signals environment;

FIGS. 13-15 show block diagrams of portions of another embodiment of a detection system;

FIGS. 16-21 show functional block diagrams of a data processing unit including programs and files comprising portions of the detection system of FIG. 10;

FIGS. 22-24 show flowcharts of an exemplary detection method;

FIGS. 25-26 show exemplary data structures according to the detection method of FIGS. 22-24;

FIGS. 27-33B show screen displays of data acquisition programs for executing the detection method of FIGS. 22-24 in the detection system of FIG. 10; and

FIGS. 34A-45B show screen displays of an analysis program for analyzing data acquired with the detection system of FIG. 10.

### DETAILED DESCRIPTION

CVRs are used as RF signal processors that convert, by crystal detection, an RF modulated signal to an audio or video signal corresponding to the envelope of the signal's RF energy and amplify it to detection values. CVRs are used in a variety of RF receivers including radar detection systems. PSK is a digital communication modulation type in which the phase of the transmitted signal is varied to convey information. There are several different methods used to accomplish PSK. Each method sends a "symbol" based on the desired digital data. Each symbol differs only in the phase of the RF

carrier. There are several PSK schemes that differ by the number of discrete “symbols” and how they implement the transition between the symbols. Equation 1 describes a PSK modulated signal that represents an individual symbol.

$$\text{Sin}(\omega_c t + \phi_d) \quad (1)$$

Referring to Equation 1,  $\omega_c$  is the carrier frequency,  $t$  is time and  $\phi_d$  is the symbol phase shift determined by digital data. It is common practice to rewrite Equation 1 using orthogonal symbols in-phase (I) and quadrature-phase (Q). Modulators create a PSK signal by varying the amplitude off the I and Q signals. Equation 1 can be written as shown by Equation 2 and Equation 3 to produce Equation 4 as shown below.

$$I = \text{sin}(\omega_c t) \quad (2)$$

$$Q = \text{cos}(\omega_c t) \quad (3)$$

$$\text{Sin}(\omega_c t + \phi_d) = I^* \text{cos}(\phi_d) + Q^* \text{sin}(\phi_d) \quad (4)$$

Some common PSK types are binary-PSK (BPSK), quadrature-PSK (QPSK) and 8PSK also called octal-PSK. BPSK has two different symbols corresponding to one bit of data that are 180° apart. QPSK has four different symbols corresponding to two bits of data placed 90° apart. 8 PSK has four different symbols corresponding to three bits of data placed 45° apart.

The I vs. Q state maps of these modulation types are displayed in FIG. 1. The resultant signal magnitude and phase is represented with a vector emanating from the origin of a desired location on the state diagram. As shown in FIG. 1, each symbol PSK modulation method theoretically has the same magnitude or power. However, when transitioning from one symbol to another, the power level changes. When making a 180° transition, the power drops to zero as the state transition path goes through the origin. Since CVRs are essentially transforming power into a video signal, the video signal drops at symbol transitions.

FIG. 2 shows a QPSK modulation and CVR reception signals demonstrating how a CVR turns QPSK signals into a video signal. Theoretically, the carrier phase shift at the symbol transitions would be instantaneous. However, when implemented with real world circuitry, time is required to perform the phase shift which also causes fluctuations in the overall power level of the signal. FIG. 3 shows an oscilloscope sample of an actual PSK signal (the actual RF carrier wave is not seen due to bandwidth limitations of the oscilloscope) and FIG. 4 shows an oscilloscope sample of an actual PSK signal after conversion to a CVR video signal output.

FIG. 5 shows another representation of a signal with QPSK modulation. Active video in this embodiment is defined as an active video region 11 and a null region 15 is an inactive video area. Active video or null signals can be Boolean signals that represent the portions of video that adhere to a predefined condition or conditions. In particular, active video signal in this example is identified when a signal voltage value exceeds a reference threshold value 13, in this case a voltage threshold determined based at least in part on noise levels found in a sampled signal. Null portions can be identified as portion of video below the reference threshold value 13.

Research was conducted to examine the impacts of multiple PSK signals on CVR video. The research consisted of capturing CVR video with a variety of PSK signal being injected into the CVR. The following aspects of PSK signals were studied: RF carrier frequency; RF carrier amplitude; modulation type (BPSK, QPSK, 8PSK, 16PSK and OQPSK) and symbol rate. Research showed at slow to medium data rates, a video signal was characterized by short nulls at sym-

bol transitions that had a large phase shift and minor dips in voltage level for small phase transitions. This makes the presence of the PSK modulated signal detectable by looking for percent of active video ranges to be between 70% and 95%. Non-communication signals normally have a much lower duty cycle. At higher data rates, the traditional video response of the CVR begins to break down due to response limitations of the CVR. The null periods become much longer and the percent of active video starts to decrease. However, since symbol transitions happen much faster, the number of nulls greatly increases. At the higher data rates, the presence of PSK modulated signal is detectable by the large number nulls. Based on this research, a signal detection algorithm was created to detect a PSK signal which has been processed by a CVR.

One exemplary detection algorithm was implemented for a PSK signal. First, a voltage threshold was set just above a CVR video noise floor. Video above the threshold was considered active video while voltage output from the CVR below the threshold is considered inactive video. Periods of inactive video are referred to in this embodiment as “nulls”. Next, an examination of CVR video output signal is conducted for a predetermined amount of time, for this example approximately two milliseconds (ms). A percentage of active video and nulls per unit time, e.g., seconds, is analyzed. If the percent of active video is above a threshold (e.g., 75 percent) or if the nulls per second are above a set number (e.g., 1.5 million nulls per second (MNPS)), then a signal is declared to be a PSK modulated signal.

FIG. 6 shows an exemplary embodiment of the invention where a signal receiver 51, e.g., a radio frequency antenna, is coupled to a CVR 53. The output of the CVR 53 is input into a signal processor unit 55 with an exemplary embodiment of the invention.

FIG. 7 shows an exemplary processing sequence for identifying a target signal in a radio frequency pulsed environment using a CVR system. At processing step 101, a voltage threshold is set which is determined based upon ambient noise signal levels produced by the CVR where signals above the threshold are considered active CVR video signals. Hysteresis may be applied to the threshold level to reduce or eliminate the effects of noisy signals at the threshold level. Hysteresis causes the threshold to be slightly higher when video is below the threshold. At processing step 103, phase related signal characteristics of nulls per second and percent active CVR video signals (e.g., 1.5 MNPS and 80% active CVR video signals) are set. At processing step 105, a sample of the CVR video signal is taken over a sampling period such as 2 ms. At processing step 107, a statistical analysis of the CVR video signal is performed including determination of percent active and nulls per second using the phase related signal characteristics from processing step 103. In other words, analysis at this step can include analyzing threshold compared signals to determine signal characteristics such as percent of signal that is active per unit time and nulls per unit time thus calculating characteristic values for each sampled signal. At processing step 109, measured signal characteristics are compared to thresholds set in step 103 to determine and report the presence of PSK signal. In other words, for example, processing at this step can include comparison of signal characteristics or values produced from statistical analysis from Step 107 to threshold values set at Step 103 to determine and report the identification or presence of a target signal, such as e.g., a PSK signal. Incidence and other characteristics such as amplitude of target signals can be recorded in a counter at this step. At processing step 111, a determination is made of whether another signal is to be processed or reprocessed (e.g.,

analyze another signal for PSK detection); if yes, then processing resumes at processing step **105**; if no, then processing halts. Results from this process include a determination of whether or not a target signal, e.g. a PSK signal, was present in the sampled signal, e.g., CVR video signal. Additional data can be recorded at step **109** such as nulls per unit time and percent active video (e.g., assuming a voltage signal threshold X for a video signal input, time period actually above the voltage signal threshold X divided by a specified time period). For example, if a signal threshold of 6 mv is exceeded for 30 ms over a 60 ms measurement time period, analysis would calculate a 50% percent active video statistic.

Phase related signal characteristics set at step **103** can also be on duration of pulses such as max high duration, average high duration, modulation type (e.g., BPSK, QPSK, 8PSK, 16PSK, OQPSK) or antenna power levels at a transmitter which is producing a target signal versus signals received at a receiver antenna.

FIG. **8** shows a functional block diagram of one embodiment of a PSK detection processing sequence. Video Signal **151** is the output of a CVR or similar receiver which creates video based on received RF power level. Signal processor system **153** compares the video voltage level to a threshold to create a Boolean VAT signal **155**. Signal processor **153** could consist of either or both analog or digital circuitry. Hysteresis could be used in threshold to eliminate effects of noise close to threshold level. The threshold level is placed above ambient noise levels to demark levels of meaningful reception and no signal. VAT signal **155** represents Voltage Above Threshold (VAT) by identifying the active video regions. Both signal processor systems **157** and **159** analyze the VAT signal **155** to calculate signal characteristics. System processor **157** analyzes the signal for a set amount of time for the active video content and creates a measure. Percent Above Video (PAV) **161** represents such a active video measure. System Processor **159** analyzes the signal for the same set amount of time as used by system processor **157** to create a measure of the number of nulls. Nulls Per Second (NPS) **163** represents a null measurement. The signal characteristic measurements **161** and **163** are analyzed by system processor **165** to compare measure values to known references to calculate whether or not the original signal contained PSK modulation. The references or threshold levels are based on known characteristics of PSK signals such as  $PAV \geq 75\%$  or  $NPS \geq 1.5$  million. These references may change based on individual CVR receiver response characteristics. PSK Detect signal **167** is a Boolean signal that represents whether or not a PSK signal was detected. System processors **157**, **159**, and **165** could be implemented using either or a combination of analog circuitry, digital circuitry, or software.

FIGS. **9A-9B** show block diagrams of an integrated circuit with one embodiment of portions of the invention. Signal inputs ICLK **201**, DVAT **203**, ACQ **205** and CLR **207** are coupled with a signal processor system **211**. Inputs ACQ **205**, CLR **207** and DVBT **209** are coupled with signal processor system **213**. Signal inputs referenced herein in this embodiment are defined as follows:

ICLK=Inverse Clock (clock signal)

DVAT=Digitized Video Above Threshold (e.g., 1 bit analog to digital (A-D) of CVR video)

ACQ=Acquire (signal which is used to define the sample period time)

CLR=Clear (resets the video statistic count to 0 for start of next ACQ period)

DVBT=Digital Video Below Threshold (The inverse of DVAT)

Inputs DVAT **203** and DVBT **209** are from a signal processor (not shown) which digitizes outputs from a CVR; the signal processor (not shown) receives RF signals and output signals based upon power levels of received power signals comprising active signals and null signals where the active signals are relatively higher than said null signals by a predetermined value; in this case the predetermined value is a noise level of signals received by the signal processor (not shown).

Signal processor **211** is a signal processing system that outputs a data, in this case VACNT **215** (Video Above Count), which is a count of the number of samples above a specified threshold during a predetermined sample period detected in signal input DVAT **203**. Signal processor **213** is a signal processing system adapted to output data, in this case signal NULLCNT **217** (Null Count), determined based upon nulls per unit time observed in signal input DVBT **209**.

Signal VACNT **215** is coupled to an input of PAV Compare Signal Processor **221**. Signal processor **221** compares signal VACNT **215** with a predetermined value, in this case  $PAV \geq 75\%$ , and outputs signal DETECT(0) **225** if VACNT **215** exceeds the predetermined value (e.g.,  $PAV \geq 75\%$ ). In this case, the number actually compared is the count number that would equal 75%: total number of samples\*0.75.

Signal NULLCNT **217** is coupled to an input of NULL compare signal processor **223**. Signal processor **223** compares NULLCNT **217** with a different predetermined value, in this case  $NULL \geq 1.5$  MNPS, and output, signal DETECT(8) **227** if NULLCNT **217** exceeds the predetermined value (e.g.,  $NULL \geq 1.5$  MNPS). In this case, NULLCNT **217** is actually compared to a number that represents the number of nulls required create 1.5 MNPS:  $1.5e6 * \text{sample time}$ . Signals DETECT(0) and DETECT(8) may be pooled to determine whether a PSK signal has been detected.

A software, hardware or machine implemented detection algorithm can be used to detect the presence of other phase modulated signals in CVR video. Detection algorithms can be software, hardware or a mixed software/hardware implementation. A benefit of the invention is to detect with very simple circuitry the presence of a particular type of modulation which is useful in test systems and signal processing, particularly in cases where filtering of signals is not possible. It should be noted that the invention will work for other modulation types, such as many other Quadrature Amplitude Modulation (QAM) schemes, thus the invention is not limited to use in PSK schemes. It should also be noted that the invention can be used with wired system such as phone lines, cable lines, LAN, Internet, etc.

The detection method and system shown in FIGS. **6-9B** may be used to characterize a signals environment. In the embodiments of a detection system and method described herein, the unique characteristics of a signal from a source antenna may be used to characterize electromagnetic interference in a signals environment. An EMI characterization system, as described in detail further below, may be used to show graphically EMI intensities in relation to different orientations of the source antenna. The data collected by the detection system may be analyzed to determine the level of antenna coupling between two systems. Tests can be used to perform general characterizations or to evaluate different source antenna or signal environment modifications. Such modifications may include positioning of antennas, design of signal barriers, selection of RF levels, and any other changes and modifications that affect RF levels received by the target antennas.

The detection system is described herein with reference to a source antenna and two target, or victim, antennas. The source antenna may be controlled by the detection system,

thereby enabling mapping of EMI intensity at each of a multitude of orientations, or positions, of the source antenna. In another embodiment, the detection system receives orientation information from the source antenna without controlling the source antenna. The information received may be presented to a user, together with the intensity data, in a graph or a data table, in a computer display, and/or printed, to enable the user to recognize areas or regions around the target antenna of high, low and medium intensity interference at different source antenna orientations. The information received is correlated in time with the data obtained from the target antenna.

FIG. 10 shows a communication system and an exemplary detection system according to one embodiment of the invention. Communication system 257 includes source antenna 261 coupled to control unit 263 which is adapted to control the orientation, power, and other characteristics of source antenna 261. Communication system 257 further includes target antenna 275 and target antenna 277. Optionally, a global positioning system (GPS) may be coupled to identify antenna locations. A GPS may be desirable in situations where source antenna 261 and/or target antenna 275, 277 are mounted in movable or flexible structures such as, for example, atop high-rise buildings. Location information provided by the GPS may be used with EMI data to compensate for the motion of antenna 261, 275, 277. Data associated with transmissions, antenna movement, and the timing of such transmissions may be stored and combined with data received from AHU 274, 276.

FIG. 12 shows a plurality of antennas in a communication environment. Sources 293, 295, 297, 299, 301, and 303 represent a plurality of signals in the environment. Antenna's 285, 287 and 289 represent target antennas. Sources 293, 295, 297, 299, 301 and 303 generate a plurality of signals of varying characteristics. These signals, and their reflections, may be detected by, and may cause interference with, antennas 285, 287 and 289.

Referring again to FIG. 10, detection system 259 comprises detection control unit (DPU2) 265, keyboard emulator 267, communications system 269, and an antenna collection unit for each target antenna. An antenna collection unit may include an antenna control unit (DPU1) and an antenna hardware unit (AHU). FIG. 10 shows two antenna collection units which include DPU1 271 coupled to AHU 274 and DPU1 273 coupled to AHU 276. Keyboard emulator 267 couples to control unit 263 by any means known in the art such as a USB connector, PS/2 connector, and others. DPU2 265 provides instructions to keyboard emulator 267 to control the transmission parameters of source antenna 261, e.g. transmission orientation parameters such as elevation and azimuth angle. In an alternative embodiment, DPU2 265 couples directly to control unit 263 by any known means such as, for example, a wireless connection, a USB connection, an RS-232 connection, and others, without emulating a keyboard.

DPU2 265 communicates with DPU1 271, 273 via communications system 269 to receive data from signals acquired by AHU 274, 276, respectively. AHU 274, 276 interfaces with target antenna 275, 277, respectively, and acquire signals received by it. Target antenna 275, 277 comprises one or more receivers which may receive similar or different signals. Signals may include target signals, non-target signals and background noise signals. AHU 274, 276 comprises one or more detector cards for receiving signals from each of the one or more receivers. A target antenna may include a single receiver in which case a corresponding AHU may include a single detector card. Communications system 269 may comprise components to establish hard-wired, wireless, internet, cellu-

lar and any other known connection means. In one embodiment described more fully below, DPU2 265 and DPU1 271, 273 are coupled in a client-server network. DPU2 265 and DPU1 271, 273 comprise an operating program having a graphical user interface (GUI) for setting-up DPU2 265 as a client and DPU1 271, 273 as server. Upon activation of the appropriate GUI controls, DPU2 265 commands, through DPU1 271, 273, AHU 274, 276 to acquire data. The client-server network may be a local area network (LAN). DPU1 271, 273 may comprise DPU1 and DPU2 may be laptop computers including I/O ports such as, for example, National Instruments' PCMCIA cards and/or RS-45 ports, for connecting with the LAN.

AHU 274, 276 include signal processors for characterizing video signals from target antenna 275, 277. Signal processors may be implemented in hardware, software and a combination of hardware and software. AHU 274, 276 may include target signal detection cards and hardware/software for further processing and transmitting signals output from the detection cards. While the invention is described with reference to PSK signal receivers, the invention is not so limited. The teachings provided herein may be applied to characterize EMI intensity of signals with other types of signal modulation. Detection system 259 is configured to characterize PSK signals. AHU 274, 276 may comprise signal processors which receive video signals and signal processors to produce PAV, NPS, average level, maximum level, PSK detect and other data. The type of data produced by the signal processor depends on the characteristics of the modulation type of the target signal.

FIG. 11 shows an embodiment of an antenna collection unit. AHU controller unit 279 receives signals from AHU 281. AHU 281 is coupled to receive, and receives, signals from target antenna 283. Each transmitter in target antenna 283 is connected to a terminal on AHU 281. Terminals are labeled J1-J16. Each terminal is connected to a signal processor for detecting a target signal.

FIGS. 13-15 are block diagrams showing the configuration of an exemplary antenna collection unit. FIG. 13 shows a block diagram of an AHU. The AHU has a number n of detector cards receiving n antenna/receivers signals. The outputs of the detector cards are provided as inputs to a control card. The control card processes the plurality of signals produced by the detector cards and outputs AHU data to DPU1. While the AHU is generally described as including detector cards and control cards, the function of detector cards and control cards may be performed in a software implementation or in a combination of software and hardware implementation.

FIG. 14 shows a block diagram of a PSK detector card coupled to an antenna/receiver which produces a voltage signal from an RF signal and to a control card. A functional representation of a PSK detector card was provided previously with reference to FIG. 8. The detector card receives the voltage signal into an A/D converter and a pair of analog signal processors. The AND converter samples the voltage signal and provides a digital output to a VAT counter and to a NULL detect counter. The VAT counter counts VAT pulses during a fixed time period and outputs the count to a PAV comparator which compares the VAT count to a reference value to produce an AV (average video) detect signal when the active video content exceeds the reference value. The NULL detect counter counts null signals over a fixed time period, typically a second, and outputs the count to a NULL comparator which compares the signals to a NPS reference and produces a NULL detect signal when the signal exceeds the NPS reference. The AV detect and NULL detect signals may

be pooled to provide a PSK signal. Alternatively, the two signals may be provided to a control card without being pooled. The analog signal processors capture the average and max level of the voltage signal which is then digitized in a pair of A/D converters to produce average and maximum, or peak, power level signals. As is described below, the power level, or intensity, of a signal is used to correlate EMI to various source antenna orientations.

FIG. 15 shows a control card which receives inputs from a plurality of detector cards, processes the detector card signals, and outputs EMI characterization information to DPU1. The control card includes an input I/O port, a control processor, and an output I/O port. The control processor includes a controller, a memory controller, and a memory. In one embodiment, the control processor receives data from the detector cards and stores the data in memory until it receives a signal from a DPU1 instructing the control processor to output data throughout the output I/O to DPU1. In an alternative embodiment, the output I/O port is configured to communicate over a LAN, the internet, wirelessly or over a hardware connection, directly with DPU2. In another embodiment, the AHU streams data continuously to DPU 2 and DPU2 associates EMI intensity data to source antenna orientation based on the timing of transmission.

FIGS. 16-18 show components of a data processing unit configurable as a DPU1 and DPU2. The terms data processing unit, computer and computing device are used interchangeably to signify a system comprising a processing unit, computer-readable media, input/output devices, and a program stored in the computer-readable media operable to cause the processing unit to perform a function using the input/output devices. A program, application, or computer program is here, and generally, conceived to be a sequence of computer instructions representing steps of methods for achieving desired results. The instructions are processed by a computer and require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. Programs may use data structures for both inputting information and producing the desired result. Data structures impart a physical organization on the data stored in computer memory and greatly facilitate data management.

The actual physical implementation of a data structure may take several forms, from complete individual records storing the substantive information with several key indexes for locating a particular record, to a plurality of tables interrelated by relational operations, to a matrix of cross-linked data records, to various combinations and hybrids of these general types. In particular physical devices, a database may be structured and arranged to accommodate the restrictions of the physical device but, when transferred to a general purpose computer, be able to be stored in a variety of formats. Thus, while certain types of information may be described as being stored in a "database" or in a "data-structure" from a conceptual standpoint, generally such information may be electronically stored in a variety of related structures with a variety of encoding techniques.

Input/output devices include display devices, printers, and user input devices. Display devices include video screens, projectors and monitors. A display device may comprise a plurality of monitors coupled to a video output card, computer or server such that each monitor displays a portion of a graphic display and together the plurality of monitors display the entire graphic display. A display device may also comprise a plurality of monitors coupled to disparate video drivers which are coordinated to display an integral graphic inter-

face. An input device may comprise a mouse, a keyboard, a software recognition system, a touch-screen, a track-ball, a hybrid device including more than one aforementioned devices, and the like.

A graphic display refers to pixel data used to present an image on an output device. Generally, an application writes images in the form of pixel data to a memory array or frame buffer and provides the frame buffer data to the output device for presentation. Raster scanning is the most common method of image transmission to an output device. The screen display may comprise display objects having images representing the shape, color, style, and other characteristics of the object. Graphic images may represent text.

A computing device may include a variety of computer-readable media. Computer-readable media can be any available media that can be accessed by the computing device and includes both volatile and non-volatile media, and removable and non-removable media. Computer-readable media may comprise computer storage media to provide storage of computer-readable instructions, software applications, data structures, program modules and other data for the computing device. For simplicity and without limiting the disclosed embodiments to any particular physical embodiment of a computer-readable media, computer-readable media is referred to herein in singular form to represent one or more discrete physical media. Thus, computer-readable media includes a harddisk, a plurality of harddisks, a combination of a harddisks and one or more of an optical disk such as a CD or DVD, a flash-drive, and a diskette, and any other media combination. The physical embodiment of the media may comprise local components and remote components accessible through a network and/or the internet.

A computing device may operate in a network environment using logical connections to one or more remote computers. The remote computer may be a personal computer, a server, a network PC, and typically includes many or all of the elements described above. The logical connections include a local area network (LAN) and a wide area network (WAN), but also include other networks. The terms "network," "local area network," "LAN," "wide area network," or "WAN" mean two or more computers which are connected in such a manner that messages may be transmitted between them. Such network environments are commonplace in office, enterprise-wide computer networks, Intranets, and the Internet. In such computer networks, typically one or more computers operate as a "server," a computer with large storage media such as hard disk drives and communication hardware to operate peripheral devices such as printers or modems. Other computers, termed "clients" or "workstations," provide a user interface so that users of computer networks can access the network resources, such as shared data files, common peripheral devices, and inter-workstation communication. The computers have at least one processor for executing machine instructions, and memory for storing instructions and other information.

The computing device components shown in FIG. 16 include processor 305, storage 311, I/O port 309, and GUI 307. Processor 305 executes instructions stored in storage 311 responsive to inputs received through GUI 307 and I/O port 309. One or more programs for implementing a method according to the invention are stored in storage 311. Programs may include AHU control program 341, analysis program 343, operations program 345, reporting program 347, and other programs such as a standard operating system and web browser. In one embodiment, the programs are developed in a data acquisition software platform such as LabVIEW™ software, available from National Instruments Corporation, Aus-

tin, Tex. Different programs use different types of files during testing of a signal environment. The files may be created by operations program 345 and may be loaded into any compatible computer for use with analysis and reporting program 343, 347. In one embodiment, files associated with a particular test share the same file name but have different file extensions.

Files table 349, shown in FIG. 18, displays file names, data content, file type, and extensions associated with each file. The header file records several different test event parameters such as the test name, the date of the test, personnel involved in conducting the test, program version, the type of system being tested including types of antennas and available channels, modulation, and data rates, setting comments and notes. The settings file defines the test range and resolution including test frequency, attenuation, sweep dimensions, sweep type, azimuth start, azimuth increment, azimuth stop, etc. Some or all of these test settings characterize control of source antenna 261. AHU test data files may be used to record the time, orientation of source antenna 261, and AHU data. Furthermore, a time/date stamp may be applied to acquired and transmitted data. The time/date stamp may be used to correlate EMI values to external events. As source antenna 261 cycles through or sweeps through a sequence of test points, data corresponding to such a test point is recorded in data files. The filter settings file may be used to filter data and thereby exclude the data from analysis and reporting. The source antenna 261 profile may also be used to obtain information about a single transmitter/signal source for analysis and reporting. Once these inputs are set, an operator can run a characterization test. In an alternative embodiment, the files may be created by AHU control program 341 or other programs configured to receive AHU data.

FIGS. 19-21 are introductory block diagrams depicting the functionality of AHU control program 341, operations program 345, analysis program 343 and reporting program 347. The programs are described in more detail below. AHU control program 341 is used to setup and troubleshoot the AHU. The program can test detection cards and communications between detection cards and receivers. Flags are used to indicate malfunctions. Operations program 345 is used to perform tests. The program creates test files, controls the source antenna, and directs the AHU to acquire and upload data. Analysis program 343 uploads data from the files and performs analysis including generation of graphical displays of EMI intensity and data validation. The analysis program can compare and filter data. Reporting program 347 performs all the analytical tasks performed by analysis program 343 and creates reports of data and graphs. Reports may be created with templates such as Microsoft™, Excel™ and Word™ templates available from Microsoft Corporation, Seattle, Wash.

Having described the basic structure of detection system 259, its operation will now be described in detail. FIGS. 22-23 are flowcharts of one exemplary method for setting up and operating detection system 259. At step 801, hardware as previously described is provided. At step 803, a first antenna collection unit is configured. The antenna collection unit may comprise AHU 274, 276 and DPU1 271, 273 or DPU2 265. Setup may include testing EMI, self-testing of detection cards, testing of communications between receivers and detection cards and testing communications between AHU 274, 276 and DPU1 271, 273 or DPU2 265. AHU control program 341 may be used to direct some or all of the steps of the configuration process. The operator may manually send commands to AHU 274, 276 such as re-set, acquire, upload data, high sensitivity mode, turn RF limiter switch on and off,

and the like. The operator can also read AHU 274, 276 status flags and acquisition data on command.

At step 805, the operator may choose to setup additional antenna collection units. At step 807, the source antenna controls are configured. DPU2 265 is coupled to source antenna control system 263 to enable control of source antenna 261 by DPU2 265. Coupling may require use of a keyboard emulator or setup of a wireless or hard-wire connection. Setup may also include providing to DPU2 265 source antenna 261 model/configuration parameters to enable DPU2 265 to emulate the proper keyboard characters and control source antenna 261. At 809, a network is set up for establishing logical communication between DPU2 265 and AHU 274, 276. A network may comprise an internet network including a hub and a client server system, a wireless network, or a hard-wired connection. At 811, connectivity and quality of service are tested. Connectivity may be tested between AHU 274, 276, DPU1 271, 273, DPU2 265, and communications system 269. Connectivity and quality of service testing of networks and computers is well known in the art.

Once connectivity is established and quality of service is verified to be sufficient, antennas may be activated and configured for transmission. At step 813, source and target antenna 261, 275, 277 are activated. Source antenna 261, or transmission antenna, is configured using GUI 307 and operations program 345. Activation means turning the antennas on, self-testing, and performing necessary standard functions to enable the antennas to receive instructions from DPU1 271, 273 and DPU2 265 and to perform those instructions.

Once source and target antenna 261, 275, 277 is activated, testing may begin. At step 815, source antenna 261 transmission characteristics are set up. DPU2 265 commands source antenna 261 to transmit at predetermined power, frequency and attenuation levels. These levels are defined in files associated with the test. At step 817, source antenna 261 is steered to a transmitting position. Source antenna 261 may comprise electronic steering mechanisms, may only have mechanical mechanisms without electronic guidance, and may comprise arrays from which fixed position antennas are selected. The antenna position may be defined in polar coordinates as an elevation and azimuth parameters (EL/AZ). Elevation may range from 0-90° while azimuth may range from 0-360°.

At step 819, an acquisition pattern is set up. Setup involves defining test parameters such as the position of source antenna 261 (elevation and azimuth), scanning patterns, amount of movement between steps in a pattern, transmission frequencies, etc. and defining target antenna acquisition patterns to acquire data in a coordinated manner with source antenna 261.

During a test, the position of antenna 261 may be changed in a pattern of incremental steps of variable size and number. A detailed EMI graph may be created using a large number of small steps, for example by steering source antenna 261 in 1° steps in EL and AZ to produce 90x360 steps. The pattern may be a raster pattern which steps source antenna 261 at an elevation through all the programmed AZ steps and then repeats the pattern at a different elevation until all the steps in the test are complete. Setting the sweep pattern involves programming through GUI 307 and operations program 345 the AZ/EL limits of the sweep pattern, and the number and size of steps. Setup is described fully below with reference to the functionality of operations program 345. The acquisition pattern also includes the number of acquisitions, or data samples, to receive from each target antenna.

Optionally, at step 821, an environmental baseline is set. The environmental baseline (EB) is defined to acquire back-

ground RF signals when source antenna **261** is not active. EB data is useful to determine which portion of the EMI is caused by source antenna **261** and which portion is caused by other sources. Setting the EB involves defining a desirable sampling frequency and pattern. Obtaining a high volume of EB data may require slowing the test.

At step **823**, header information is provided. Header information identifies relevant information in the files which are created during each test. Once the header information is provided, testing may begin.

At step **825**, testing starts responsive to the operator's input. Testing may be initiated by activating a "start" object in the appropriate GUI **307** page. At step **827**, DPU2 **265** directs source antenna **261** to initiate transmissions and the antenna collection units to acquire data according to the patterns set up in the previous steps. Acquired data is uploaded from the antenna collection units to DPU2 **265** where it is saved in files.

At step **829**, depending upon status of the EB feature, appropriate processing is performed. If EB is enabled, processing continues at step **831**. If EB is disabled, processing continues at step **835**. At step **831**, EB data is stored in files. At step **833**, EB is disabled and source antenna **261** is set to transmit. Depending on the test, EMI data acquisition may take several hours and it may be desirable to obtain EB data at various intervals but not after each repositioning step of source antenna **261**. After the initial sampling of EB data, EMI data may be obtained until such time when the test requires re-sampling the EB. Then, the EB feature may be enabled to stop transmissions and acquire EB data. After acquiring EB data, the EB feature is once again disabled. EB data collection at periodic time intervals may be set up with operations program **345**.

At step **835**, depending upon status of the test, appropriate processing is performed. If the test pattern is complete, processing stops at step **837**. If the test pattern is not complete, processing continues at step **827** to conduct additional data acquisition cycles until the test pattern is complete.

FIG. **24** shows a flowchart of a data transfer process. At step **851**, DPU2 **265** commands source antenna **261** to move to a desired AZ/EL. DPU2 **265** also commands DPU1 **271**, **273** to load data from AHU **274**, **276**. At step **853**, DPU1 **271**, **273** commands AHU **274**, **276** to upload data. At step **855**, AHU **274**, **276** acquires data and sends the data back to DPU1 **271**, **273**. At step **859**, DPU1 **271**, **273** receives AHU **274**, **276** data for each sample of each receiver in target antenna **275**, **277**. DPU1 **271**, **273** creates data structures which will contain time, status, and signal data. An exemplary DPU1 data structure is shown in FIG. **25**. At step **861**, DPU2 **265** adds AZ/EL fields to the data structure and adds AZ/EL information to the DPU1 data to create a cluster. DPU2 **265** stores each cluster to create an array of clusters as AHU files as shown in FIG. **18**. An exemplary model of an array of cluster data structure is shown in FIG. **26**.

FIG. **25** shows an exemplary sample data structure Table **871**. Box **873** shows the system set up. The system includes two receivers. Two samples are acquired from each receiver at each source antenna position. The scanning pattern is from AZ 0-30° in one degree increments and EL from 0-10° in one degree increments. The scanning pattern produces 31×11 total sample points. 1st array position **875** contains data obtained from the first receiver during the first sample. Data includes results produced from PSK detection signals which are described in full detail with reference to the construction and operation of the PSK detection cards. 2nd array position **877** shows the same type of data which was obtained from the first receiver during the second sampling. 3rd and 4th array

position **879**, **881** contain first and second sample data the second receiver. Field **883**, **885** shows the status and time of the acquisition. The process will be repeated 31×11 times to complete the test.

FIG. **26** shows an exemplary DPU2 array of cluster data structure. The array comprises a plurality of rows similar in construction to the DPU1 sample data structure with the addition of fields AZ **887** and EL **889**. When the test is complete, the array will have 31×11 rows.

FIGS. **27-45B** are screen displays of different pages of programs. A screen display is an image or bitmap representation of icons or digital objects. Screen displays may be presented, for example, in a display device and a printer. Each screen display has a plurality of objects for activating processes, displaying data, setting parameters and information, and selecting settings from drop-down lists or tables. Following are descriptions of each screen display with reference to specific figures. The descriptions include tables listing in column format the reference numeral, label, and functional description of each object.

FIG. **27** shows an exemplary screen display showing a main menu of GUI **307** for activating, or opening, operations program **345** and AHU control program **341**. Menu **323** includes text box **325** indicating it is a main menu screen and a plurality of objects which may be activated to direct the operator to open various programs. In one embodiment, operations program **345** is installed in DPU1 **271**, **273** and in DPU2 **265**. First and/or second receiver **327**, **329** are activated in DPU1 **271**, **273** to open AHU control program **341**. First and/or second remote receiver **335**, **337** are activated in DPU2 **265** to open AHU remote client subprograms that allow the operator to use AHU control program **341** remotely from DPU2 **265**. In other words, DPU2 **265** communicates with AHU **274**, **276** through AHU control program **341** which is running in DPU1 **271**, **273**. The look and function of the AHU remote client is identical to AHU control program **341** with the exception of the ability to save multiple acquisition data to a file. Transmitter **335** activates operations program **345** which is described in detail with reference to FIGS. **30A-33B**.

GUI **307** may comprise a plurality of user interface portions for interfacing with various processing sequences. In one embodiment of a method for identifying target signals, first signals are transmitted by source antenna **261**. Target antenna **275**, **277** receives first signals along with other signals. Receivers in antenna **275**, **277** create second signals in the form of video from the power levels, or envelope, of the signals received. AHU **274**, **276** receives second signals and detects those of second signals corresponding to the first signals. AHU **274**, **276** transmits second data corresponding to detected signals via communications system **269** to DPU2 **265**, either directly or through DPU1 **271**, **273**. DPU2 **265** associates data corresponding to the first signals with data corresponding to the detected signals. Information files may be created to contain the associated data and stored in DPU2 **265** or DPU1 **271**, **273** may transmit the information to a different processor. A processing sequence represents the association or relationship between first signals and detected signals. Representation may comprise display in a computer monitor, printing in a printer, and presentation in any other representation means. Prior to representation, information may be filtered in a plurality of ways. Cutouts may be provided to facilitate analysis. Each of the method steps may be performed, at least in part, by an operator using a user interface.

FIGS. **28A-29B** illustrate operation of AHU control program **341**. AHU control program **341** can be operated locally on DPU1 **271**, **273** and can be activated remotely by enabling either first or second receiver **327**, **329** in DPU1 **271**, **273** and

then selecting either first or second remote receiver **331**, **333** on DPU2 **265**. In one embodiment, GUI **307** displays in DPU2 **265** pages similar to those associated AHU control program **341**.

FIGS. **28A-28B** show exemplary user interface page **351** of AHU control program **341** consisting of one tab display with two options labeled "Interface" and "Multiple Acquisition." Interface page **351** has a plurality of objects, listed in Table 1, for enabling an operator to set target antenna **275**, **277** parameters, test AHU **274**, **276**, and generally monitor the performance of AHU **274**, **276**. To initiate testing of an AHU, RF limiter switches are opened by activating LIMIT SWITCH **357**. This removes RF input from the CVRs. ACQC **371** is activated to acquire signals several times. Since RF input is removed from the CVRs, all results should be very close to zero. If a receiver reports PSK detect or average levels, then the receiver is malfunctioning. HIGH SENSE **353** switches detection sensitivity of target antenna **275**, **277** between high and normal. HIGH SENSE LED **355** and LIMIT SWITCH LED **359** display the status of the switches. RESET **361** resets AHU **274**, **276**, for example in case the algorithms lock-up.

FIFO Samples **363** indicates the number of acquisitions currently stored in the FIFO buffer of AHU **274**, **276**. Count **365** counts the iterations of internal software loops and displays no useful information except for troubleshooting. Array Size **367** indicates the size of one complete FIFO transfer. In one embodiment, the array comprises unsigned 8 bit numbers.

ACQC **371**, UPLOAD **375** and ACQC & UPLOAD **379**, and their corresponding numeric controls **373**, **377** and **381**, set the number of consecutive acquisition and upload commands sent to AHU **274**, **276**. ACQ Time Stamp **397** records the time when the last acquisition was performed.

Flags **387** provides feedback on the performance of AHU **274**, **276**. At start-up, the only flag that should be displayed is the FIFO empty flag which indicates that the FIFO buffer on the control card of the selected AHU is empty. The remaining flags indicate whether the FIFO buffer is full, there has been a communication error, AHU **274**, **276** is busy or transferring data to the FIFO buffer or acquiring signals from the transmitters.

CARD TEST **391** tests the communication between the AHU detection cards, the AHU control cards and DPU1 **271**, **273**. When activated, CARD TEST **391** causes the program to send a special acquisition command to AHU **274**, **276**. Instead of sending a command to acquire data, each detection card sends a predefined set of data to test the communications between DPU1 **271**, **273** and AHU **274**, **276**. All fourteen LEDs on Card Test **393**, which represent each detection card, should be lit green if the cards and DPU1 **271**, **273** are working properly. Card Time Stamp **389** shows the time when the last card test was performed.

BMPT Calculations **399** displays characteristics of signals received from each receiver. The BMP column shows the receiver name or identification code, and the other columns show the percent of time video was above threshold, number of times video fell below threshold each second, PSK detect via PAV criteria, PSK detect via NPS criteria, PSK detect (combined or pooled), average video level and maximum video level.

TABLE 1

353	HIGH SENSE	Activate to switch sensitivity level between high and normal
355	HIGH SENSE LED	Indicate present sensitivity level
357	LIMIT SWITCH	Activate to switch limit switch on/off

TABLE 1-continued

359	LIMIT SWITCH LED	Indicate limit switch on/off
361	RESET	Activate to reset
363	FIFO Samples	Display number of FIFO samples
365	Count	Display number of counts
367	Array Size	Display array size
369	Status Byte	Display status byte
371	ACQC	Activate to start acquisition
373	ACQC	Set number of acquisitions
375	UPLOAD	Activate to start upload
377	UPLOAD	Set number of uploads
379	ACQC & UPLOAD	Activate to start acquisition and upload
381	ACQC & UPLOAD	Set number of acquisitions and uploads
383	Flags Time Stamp	Display the time stamp when flag data was obtained
385	UPDATE FLAGS	Activate to update flags
387	Flags	Display flag status for eight flags
389	Card Time Stamp	Display the time stamp of the last card test
391	CARD TEST	Activate to test card
393	Card Test	Display card status for 14 cards
395	EXIT	Activate to exit
397	ACQ Time Stamp	Display the time stamp of the last acquisition
399	BMPT calculations	Display data from acquisitions
401	Error in	Error control box shows errors and error sources, and enables assignment of error codes
403	Error out	Error control box shows errors and error sources, and enables assignment of error codes

FIGS. **29A-29B** show multiple acquisition page **405**. Multiple acquisition page **405** displays a plurality of objects, listed in Table 2, and one tab display with two options labeled "Table" and "Graph" for acquiring, loading, saving and analyzing AHU data. The operator can set parameters for acquiring data from receivers several times at regular time intervals without repositioning source antenna **261**. The operator can also acquire and graph data. Number of ACQ **407** controls the value of the number of acquisitions that are consecutively taken. Time between ACQ **409** is the time in milliseconds between each of the multiple acquisitions. BMPT is an acronym for "receiver." Module Type **411** is the value, used in conjunction with BMPT **413**, to select which receiver is used for statistical analysis. Statistic **415** controls which statistic will be used for statistical analysis. Notes **421** is a text field which allows the operator to input notes or comments that will be saved with multiple acquisitions data. When multiple acquisition data is loaded, the notes are also loaded.

LOAD **423** re-loads multiple acquisition data files and SAVE **425** saves multiple acquisition data files. In one embodiment, this functionality is deactivated when setting AHU parameters from the remote receiver subprograms of operations software **345**.

START **427** initiates multiple acquisitions based on defined number of acquisitions and time between acquisitions input. PROCESS **431** initiates statistical analysis and display of statistical results for the defined receiver. The max and mean, and graph **435**, are repopulated based on the module type, receiver and statistic inputs.

Table page **433** displays table **437** showing statistics of the receiver selected with Module Type **411** and BMPT **413** over the multiple acquisition set. Graph page **435** displays a plot of the statistic selected with Statistic **415** for the selected receiver versus time (milliseconds). Table **437** and the graph are refreshed when data is acquired, loaded, or prompted by activating PROCESS **431**.

TABLE 2

407	Number of ACQ	Set number of acquisitions
409	Time between ACQ	Set time between acquisitions
411	Module Type	Set module type
413	BMPT	Set BMPT
415	Statistic	Set statistic
417	Max	Display maximum value of statistic
419	Min	Display minimum value of statistic
421	Notes	Add notes
423	LOAD	Load dataset
425	SAVE	Save dataset
427	START	Start multiple acquisition process
429	Multiple Time Stamp	Display time stamp of start of multiple acquisition
431	PROCESS	Activate to process data
433	Table	Table tab
435	Graph	Graph tab
437	Multiple Table	Multiple acquisition table

FIGS. 30A-30B show a screen display of an AHU server page displaying a plurality of objects listed in Table 3. Generally, the AHU server page displays information about communications between the client and the server which may be used to troubleshoot performance, stop communications and reset AHU 274, 276. The AHU server page is displayed in DPU1 271, 273 when first and second remote receiver 335, 337 are activated in DPU2 265. The AHU server page is also displayed in DPU1 271, 273 during use of testing operations program 345.

Count 455 displays the number of times AHU 274, 276 is commanded to acquire data. Bites written 457 displays the number of bites written to the client for each data loop iteration. Length 459 displays the number of bites to be written to the client for each data loop iteration. Time delta 461 is the time in milliseconds to take data for one data loop iteration. Plan deltas 463 is the accumulated array of time delta. Connection Status 465 displays the connection status of DPU1 271, 273 and DPU2 265. Control LED 467, which may be true or false, indicates whether the remote connection has or does not have control. Error in 469 displays error information present before entering the routine. Error out 471 displays the errors present. Count2 473 counts the iterations of the remote control loop2 which monitors for activation of remote first and second receiver 331, 333. Execution: State 475 indicates whether errors are preventing the remote program from executing, whether the remote program is in memory but not running, and also whether the remote program is running. STOP 477 stops all loops. Hours 479, Minutes 481, and Seconds 483 display the amount of time in a data loop. Interleave array 485 is a U8 array of data taken every data loop iteration. Graph 491 displays counts versus time.

TABLE 3

455	Count	Display count
457	bytes written	Display bytes written
459	length	Display length of bytes written
461	Time Delta	Display time delta
463	Time Deltas	Set number and amount of time deltas
465	Connection Status	Display connection status
467	Control	Display control status
469	Error in	Display status and assign status codes
471	Error out	Display status and assign status codes
473	Count2	Counter for remote control loop iterations
475	Execution: State	Displays indications of remote control problems
477	STOP	Stops all loops
479	Hours	Display hours
481	Minutes	Display minutes
483	Seconds	Display seconds

TABLE 3-continued

485	Interleaved array	Set and display interleaved array
487	Status byte	Display status byte
489	Flags	Display flags
491	Waveform Graph	Display waveform graph

FIGS. 31A-34B disclose in greater detail the function and operation of one exemplary embodiment of operations program 345. Operations program 345 is used to set up and conduct tests as was previously described with reference to FIGS. 22-23. The functions of operations program 345 will now be summarized and later explained in detail. The operator selects Transmitter 335 from the main menu to open the program. During a test, the operator receives feedback as to the number of errors, source antenna location, and receiver versus PSK detect signals. The operator has the ability to pause or stop testing before the entire test range is complete. The program may be implemented in a variety of ways depending on the desired method of transmission of data between AHU 274, 276 and the system controller unit. The screen displays display a plurality of objects, listed in Table 4, and one tab display with three options labeled "Header Info," "Settings" and "Graphs."

The operator then selects Settings tab 561 (shown in FIG. 32B) and activates Keyboard 569 to enable keyboard mode. Enabling keyboard mode allows every key pressed on DPU2 to be sent to source antenna control system 263. Next, the operator activates source antenna 261, sets up transmission frequency, sets up transmitter attenuation to determine the power transmitted out of source antenna 261, and orients source antenna 261 to the desired starting position using the keyboard to adjust to azimuth start point and to adjust elevation start point. The operator then selects Header Info tab 535 (shown in FIG. 31B) and fills the appropriate field to record test parameters. Alternatively, the operator may select Settings tab 561 to load previous test files. The operator then activates START 517 to begin the test.

In one embodiment, source antenna 261 may comprise two transmitters labeled "East" and "West". These labels are arbitrary and other labels, such as north/south, first/second, red/blue and others may be used. East Errors 493 displays the number of errors during transmission from the East transmitter during the test event. West Errors 495 displays the number of errors during transmission from the West transmitter during a test event. ASCII Commands 497 displays strings of ASCII commands sent over to keyboard emulator 267. Clockwise Count 499 displays the current clockwise step number of source antenna 261 sweep dimension. Counter-Clockwise Count 501 displays the current counter-clockwise step number of source antenna 261 sweep dimension. Clockwise and Counter-Clockwise delta 503, 505 display the difference between source antenna pointing angles step of the primary sweep dimension when sweeping clockwise and counter-clockwise, respectively. Elevation Count 507 displays the current elevation step number. Elevation Delta 509 displays the difference between source antenna elevation pointing angles. Read Time 511 displays in milliseconds the time required to read data from a TCP connection. East EN 513 and West EN 515 enable data transmission from the East and West transmitters. START 517 initiates testing.

Before tests actually begins, a pop-up window instructs the operator to verify that the system is properly set up. Upon confirmation, the test begins in accordance with defined settings. PAUSE 519 pauses a test in progress and resumes a

paused test. STOP 521 stops testing. Azimuth 525 displays the desired source antenna azimuth pointing angle. Elevation 527 displays the desired antenna elevation pointing angle. Error in 529 displays error information present before entering the routine. Error out 531 displays errors present during operation of the program.

TABLE 4

493	East Errors	Display East Errors
495	West Errors	Display West Errors
497	ASCII Commands	Add ASCII Commands
499	Clockwise Count	Display Clockwise Count
501	Counter-Clockwise Count	Display Counter-Clockwise Count
503	Clockwise Delta	Display Clockwise Delta
505	Counter-Clockwise Delta	Display Counter-Clockwise Delta
507	Elevation Count	Display Elevation Count
509	Elevation Delta	Display Elevation Delta
511	Read Time	Display Read Time
513	East EN	Activate to enable East AHU transmissions
515	West EN	Activate to enable West AHU transmissions
517	START	Activate START
519	PAUSE	Activate PAUSE
521	STOP	Activate STOP
523	EXIT	Activate to exit
525	Azimuth	Display Azimuth
527	Elevation	Display Elevation
529	Error in	Display errors and set error codes
531	Error out	Display errors and set error codes

The objects shown in the Header Info tab 5357 shown in Table 5, will now be described. INIT HEADER 537 returns all controls and indicators in Header Info tab 535 to default settings. Test Name 539 enables the addition of a test name which will be used to create all the files associated with a test. Operations program 547 enables the operator to select a source antenna system which detection system 259 will interface with. This enables detection system 259 to select proper commands to send to source antenna control system 263 which may be different depending on different models. The remaining objects allow an operator to select system characteristics for historical reference and documentation purposes.

TABLE 5

537	INIT HEADER	Activate to reset all fields
539	Test Name	Set Test Name
541	Date	Set Date
543	Test Personnel	Set Test Personnel
545	Notes	Set Notes
547	Operational Program	Select Operational Program
549	Source Antenna	Select Source Antenna
551	Target Antenna	Select Victim Antenna
553	Channels	Set Channels
555	Modulation	Set Modulation
557	Data Rate	Set Data Rate
559	Settings Comments	Set Settings Comments

FIGS. 32A-32B illustrate Settings tab 561. Objects displayed in Settings tab 561 are listed in Table 6. LOAD 565 launches a browser to enable the operator to select an existing settings file to load. SAVE 567 enables the operator to save control settings in a settings file. KEYBOARD 569 enables the keyboard mode, which enables DPU2 265 to virtually replace the source antenna controller keyboard. All setting controls are disabled while in keyboard mode. Keys pressed 571, in the keyboard mode, show the current button or buttons being pressed on DPU2 265. If no buttons are being pressed, or if the system is not in keyboard mode, the indicator will be shaded and inactive.

UP Converter Freq 573 allows the operator to input a desired source antenna 261 frequency setting. The number will be recorded in the settings file for reference. The operator must manually send the command to the source antenna system by activating SET FREQ 575. Attenuation is set in the same manner as Up-converter frequency. The numeric control and checkbox controls listed in Table 6 are activated to set a scanning pattern. These parameters establish the sample points (range of positions of the source antenna) which may, in one embodiment, include sweep dimension, type, azimuth start, azimuth increment, azimuth end, elevation start, elevation increment, and elevation end. Sweep types may include circular, reverse circular, raster, and reverse raster, among others. These parameters also establish the number of acquisitions to be made at each sample point, whether to scan as fast as possible or to delay between acquisitions, whether to measure EB and, if so, how many acquisitions to capture, on what interval and how fast to do so. Only one EB acquisition step will be made per sweep if the selected number of sample points between EB acquisitions is greater than the number of antenna steps per sweep.

TABLE 6

563	INIT HEADER
565	LOAD
567	SAVE
569	KEYBOARD
571	Keys Pressed
573	Up-Converter Freq
575	SET FREQ
577	Up-Converter Attenuation
579	SET ATTEN
581	Sweep Dimension
583	Sweep Type
585	Azimuth Start
587	Azimuth Increment
589	Azimuth End
591	Elevation Start
593	Elevation Increment
595	Elevation End
597	Acqs per Step
599	Fast as Possible
601	Time between Acqs
603	Environment Baseline
605	EB Every-Steps
607	Acqs per Step EB
609	Fast as Possible EB
611	Time between Acqs EB

FIGS. 33A-33B are a screen display showing Graphs tab 533 and displaying a plurality of objects listed in Table 7. Objects INIT DISPLAY 615, plot 617 and plot 619 are shown. Upon activation of INIT DISPLAY 615, acquired data is plotted in plot 617, 619. Plot 617 displays the overall test duration status. A red dot is placed at every source antenna pointing angle (sample point) over the entire test range. White dots replace red dots as the source antenna scans the pattern to show what portion of the test has been accomplished and what portion is yet to be performed.

TABLE 7

615	INIT DISPLAY	Activate to initiate display
617	EL/AZ graph	Display orientation of source antenna
619	PSK Detect	Display histogram of PSK detect signal

FIGS. 34A-45B illustrate the functions of analysis program 343. FIGS. 34A-43B illustrate how to select data for display, and FIGS. 44A-45B illustrate data graphically in

different formats. A plurality of objects including a tab display with four options labeled "Control Panel," "Header/Settings 1," "Header/Settings 2" and "Percent Filtered" and a second tab display with two options labeled "Graph" and "Picture" are provided via GUI 307 to facilitate data analysis. The operator may view test and system settings and may view a graphical display of the EMI or test data. Analysis involves analyzing and displaying EMI data by receiver and by band, showing EB data in the same way as EMI data is shown, changing the graphing display, showing receivers/antennas with highest EMI intensity at various AZ/EL levels and indicating how many receivers were simultaneously above the EMI threshold by AZ/EL level via a graph using filter settings. Analysis may also include sampling and displaying data by polar or rectangular graph form from one or all AZ/EL levels points using green, yellow, red colors to signify EMI intensity. Other symbols may be used to distinguish categories, e.g. high, medium, low, of intensity levels. For example, numbers and geometric shaped objects may be used.

FIGS. 34A-34B are a screen display of control panel tab 621 illustrating objects for selecting receivers and display settings for data corresponding to a selected receiver. In an exemplary embodiment, data corresponding to a selected one of object 629, 631, 633, 635, 637, 639, 641, 643 may be analyzed by activating the object and then activating OPEN FILES 645. Object 629, 631, 633, 635, 637, 639, 641, 643 select data subsets corresponding to one of eight receivers labeled ANT1 EAST, ANT1 WEST, ANT1 EEB, ANT1 WEB, ANT2 EAST, ANT2 WEST, ANT2 EEB, ANT2 WEB. An antenna may include more or less receivers which may be labeled in any way.

Data may be filtered by selecting preset values in object 651, 653, 655 corresponding to source and target antenna 261, 275, 277 transmission and reception values including such as, for example, power level (Watts in 651), threshold (threshold dBm 653), and power factor (power factor dBm 655). Object 657, 659, 661 display test characteristics set up as described above with reference to operations program 345 including, for example, power out, acquisitions per step, and EB power factor. RE-CALCULATE 647 resets the display of data and STOP 649 ends analysis based on a particular set of analysis parameters.

Data may be displayed in various ways by activating one or more of a plurality of objects. NORMALIZE 663 reduces graph variations (noise) by normalizing data, HF RADIO CUTOUPS 665 presents a cutout with the data. In one embodiment, a cutout is created by mapping AZ/EL points at which source antenna 261 does not transmit. The map of AZ/EL points may be stored in a text file having an extension ".cut" as described with reference to table 349 in FIG. 18. The file, or information to create it, may be provided by control unit 263 or may be created from the orientation data provided by DPU2 265 or may be created in any known manner. When EMI data is plotted against AZ/EL values, the cutout may be plotted in a distinguishable manner, for example using a different plotting color. EMI values above background noise are not expected at AZ/EL plot points corresponding to source antenna 261 orientations at which a transmission did not occur. Presence of such EMI values would indicate malfunction of a receiver, because the receiver appears to receive a target signal when such signal is known not to exist. Data from the malfunctioning receiver may be masked or removed from the plot by applying a filter as disclosed with reference to FIGS. 37A-37B. PIC 667 disables or enables display of picture 729, shown in FIGS. 38A-38B, and CALC STATS 669 enables and disables routines that calculate statistics, which may be useful to speed analysis. Color map 671

changes colors used to map data in picture 729. Object 673, 675, 677, 679, 681, 683, 685, 687 may be activated to select a specific receiver, data type, statistic and acquisition cluster number for display as illustrated in more detail below with reference to FIGS. 38A-43B. The labels for these objects vary with the type of antennas used.

FIGS. 35A-35B and 36A-36B are screen displays of header/settings 1 tab 623 and header/settings 2 tab 625 illustrating objects displaying header settings and test settings corresponding to test data files having data obtained during transmission from one or a second transmitter in a source antenna 261. More or less tabs may be used depending on the number of transmitters used.

FIGS. 37A-37B are a screen display of percent filtered tab 627 displaying a plurality of objects for filtering data. Several forms of filtering may be applied. The Filter Table shows the percentage of data filtered for each transmitter/receiver combination which may be used to confirm that filtering is occurring. In one embodiment, filters may be applied to mask data from individual receivers. Data from each receiver may be first plotted along with a cutout to determine whether to filter the receiver's data. EMI data may comprise data from one or more receivers. Receivers may be provided which receive different types of target signals. Receivers may be oriented to receive from different directions a target signal which is the signal transmitted from source antenna 261. The target signal may bounce off a surface before being received by a receiver. Data from multiple receivers and from multiple target antennas may be plotted concurrently to obtain an image representing all of the EMI information received by them. If one or more receivers malfunction, data from the malfunctioning receiver may corrupt the EMI representation by presenting EMI values above background noise where none exist. A malfunctioning receiver may be identified by application of a cutout as described with reference to FIGS. 34A-34B and their data may be masked using a filter. In one embodiment, data is masked by changing the EMI value from a high value to the lowest value category or the lowest intensity value in the display. In another embodiment, data is masked by plotting masked data with an identifying color or symbol. In yet another embodiment, masked data is not plotted.

In another embodiment, data may also be filtered and masked by setting threshold parameters of detection cards based on the characteristics of various modulation types. When detecting PSK signals, for example, as described with reference to FIG. 14, a PSK detect signal is produced based on comparison of various counts related to active video received to predetermined parameters. The active video received count information may also be compared to predetermined parameters to filter data. A processing sequence and a user interface may be provided to adjust the predetermined parameter values to change filtering criteria. Masking may be applied in the manner described in relation to masking data from specific receivers. Alternatively, predetermined parameter values to filter data may be programmed based on experiential knowledge obtained using a particular detection system.

As described previously with reference to a PSK detection card, a PAV comparator compares a VAT count to a predetermined reference to produce an AV detect signal when the active video content exceeds the reference value, and a NULL comparator compares a NULL count to a second predetermined reference, or NPS reference, and produces a NULL detect signal when the signal exceeds the NPS reference. Another pair of threshold reference values, or filter values, may be set by a user interacting using a user interface to interact with a processing sequence. The processing sequence compares filter values to counts and filters data when filter

values achieve a predetermined relationship related to the counts. Filtering may involve changing values of the AV detect signal, the Null detect signal and/or the EMI values. Filter values may be set higher or lower to customize how EMI values from the receiver are plotted. A signal representative of EMI level may be obtained from an exemplary detection portion as shown in FIG. 14 where both average and maximum EMI levels are output in addition to an AV detect signal, a percentage above video, or PAV, signal, a NULL detect signal, and a Nulls per second, or NPS, signal.

In one exemplary embodiment, a PAV filter may be created by setting a PAV filter value. A processing sequence compares the PAV filter value to the PAV signal and overrides the AV detect signal and the EMI value if the PAV signal exceeds the PAV filter value. For example, if the PAV filter value is set to 99%, the PAV detect signal and the average and max EMI levels may be masked to prevent presentation of EMI values corresponding to PAV signals exceeding 99%. This filtering technique may be useful when a receiver outputs a PAV signal equal to 100% for all AZ/EL points which may be highly improbable. In an analogous manner, a NPS filter may be created by setting a NPS filter value.

Filtering may be accomplished by enabling FILTER ENABLE 719 and specifying receivers whose data will be filtered. Dials or buttons or other interfaces may be provided to facilitate selection of receivers for filtering. A user interface displays Filter Cluster 725 showing eight groups of receivers formed based on transmitter and band configurations. Groups may be formed in other ways or not at all. A group may have any number of receivers, i.e. one, five, ten, fifteen, twenty and more receivers. Each receiver is assigned a number for convenience. Selection may be performed by activating one or several dials in Filter Cluster 725. The left-most dial in a group indicates how many receivers are filtered. The right-most dial in a group selects a receiver number. Initially, a user dials a receiver number, i.e. 3, so that the dials show "0, 3" to filter receiver number 3. To filter another receiver in the group, the user increments the left dial and selects a receiver number, i.e. 5, so that the dials show "1, 5". A processing sequence records the selected information and another processing sequence applies the selected information to change the intensity plot based on masking criteria.

Once dials in Filter Cluster 725 have been set, the settings can be saved to a filter file having extension ".flt", as described with reference to table 349 in FIG. 18, by activating SAVE FILTER 721. In the embodiment shown, one filter file is created which is used to filter the desired receivers when the filter is enabled. In another embodiment a plurality of filter files may be created and the user may select from the plurality of filter files a desirable filter. CLEAR FILTER 723 resets the dials and removes filters.

FIGS. 38A-43B are screen displays of control panel 621 illustrating various options for selecting data subsets for display and analysis. HF RADIO SELECT 673 enables the operator to select subsets corresponding to each transmitter, combined low EMI values from both transmitters, or combined maximum EMI values from both transmitters. Selection of ANT 1 is shown in FIGS. 38A-38B. RF RECEIVER SELECT 681 enables the operator to select subsets corresponding to all receivers (SYSTEM) or individual receivers. Selection of EAST DF ONLY is shown in FIGS. 39A-39B. EAST DF ONLY is an exemplary label denoting an individual receiver is selected. Other exemplary labels include SA, SF, PA and PF representing starboard/port forward/aft directions in the case of vessels, and NE, NW, SE, SW representing fixed orientations.

DATA TYPE 675 enables the operator to select subsets corresponding to test data with source antenna 261 activated or EB data. Selection of TEST data is shown in FIGS. 40A-40B. BAND 683 enables the operator to select from a plurality of reception bands which a receiver may detect. Selection of BAND 3 is shown in FIGS. 41A-41B. STAT MODE 677 enables the operator to select a subset of data for display based on the test modality, e.g. single acquisition or average of multiple acquisitions, maximum DF value, simultaneous DF receivers, and maximum number of DF receivers. DF is a label for a type of receiver and holds no particular meaning in relation to the invention. Selection of MAX DF VALUE is shown in FIGS. 42A-42B. STATISTIC 685 enables the operator to select a statistic of the data for display. Selection of POWER, corresponding to the power level of a transmission from source antenna 261, is shown in FIGS. 43A-43B.

FIGS. 44A-44B are a screen display of picture tab 691 displaying a data subset selected as described above with reference to FIGS. 38A-43B in a polar coordinate graph 729. Graph 729 includes a plurality of concentric elevation grid lines spaced in 10° intervals ranging from 0° to 90° and a plurality of radial azimuth grid lines spaced in 18° intervals ranging from 0° to 360°. EMI test data obtained from receiver EAST DF of ANT 1 receiving on BAND 3 is shown. As previously described, any subset of data may be presented in graphical form by selecting the appropriate parameters in control panel tab 621. Data obtained at each sample point may be displayed in color representing various intensity levels. Color Map 671 was selected therefore low intensity values are displayed in green, medium intensity is shown in yellow, and high intensity is shown in red in DPU1 or DPU2. In black and white, the screen display shows green as a white square, red as a black square, and yellow as a cross-hatched square. Graph 729 shows that small amounts of EMI are generated when source antenna 261 transmits from an elevation below 40° at azimuth ranging between 72° to 360°. However, at an elevation between 20° and 30° at azimuth ranging between 36° and 54°, a number of consecutive high EMI values are shown.

FIGS. 45A-45B are a screen display of graph tab 689 displaying a data subset selected as described above with reference to FIGS. 38A-43B in orthogonal coordinate graph 693. Graph 693 shows elevation on the vertical axis in 10° intervals ranging from 0° to 90° and azimuth on the horizontal axis in 18° intervals ranging from 0° to 360°. Data values obtained at each sample point are displayed in color representing various intensity levels. EMI with amplitude ranging between -40 and -50 dBm is displayed in green, amplitude ranging between -30 and -40 is shown in yellow, and amplitude ranging between -20 and -30 is shown in red in DPU1 or DPU2. In black and white, the screen display shows green as a white square, red as a black square, and yellow as a cross-hatched square. As before, the graph shows that small amounts of EMI are generated when source antenna 261 transmits from an elevation below 40° at an azimuth range between 72° to 360°. However, at an elevation between 20° and 30° at an azimuth range between 36° and 54°, a number of consecutive high EMI values are shown. Graph 693 also shows no EMI at an azimuth range between 100° and 220°.

Report generation program 347 loads test data from test events and automatically creates a report document. Report generation functions are performed via a GUI in a manner similar to that shown above with reference to analysis program 343. All tasks performed by analysis program 343 may be reported. Templates may be used to create graphs and data may be exported via Microsoft word documents and Excel spreadsheets. A operator may create, access and store report templates

While this disclosure has been described as having exemplary designs, the present disclosure can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the disclosure using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this disclosure pertains and which fall within the limits of the appended claims.

What is claimed is:

1. A detection system for detecting target signals in a first plurality of signals comprising:

an interface portion adapted to receive a second plurality of signals which are based upon power levels of said first plurality of signals;

a memory comprising a first parameter value, a second parameter value and a third parameter value embedded therein;

a program embedded in said memory configured to:

identify active signal values and null values in said second plurality of signals, wherein said active signal values are relatively higher than said null values by said first parameter value;

determine active signal values per unit time and null values per unit time;

output an active signal if said active signal values per unit time exceed said second parameter value; and

output a null detect signal if said null values per unit time exceed said third parameter value;

said detection system further comprising:

a user interface portion for receiving at least one of said first parameter value, second parameter value and third parameter value from a user and selectively displaying at least one of said first, second and third parameter values; and

a user interface adapted to display intensity and an orientation of said first plurality of signals which are determined to be an active signal or null detect signal a with respect to a fixed point.

2. A signal detection system as in claim 1, wherein said second plurality of signals are generated by a crystal video receiver.

3. A signal detection system as in claim 1, wherein said first parameter value is determined based upon a power differential between transition states of a phase shift keyed (PSK) modulated signal.

4. A signal detection system as in claim 1, wherein said second parameter value is determined based upon a relationship between active signal values and null values which is represented by a percentage of active signal values over a sampling time period.

5. A signal detection system as in claim 4, wherein said percentage of signal values over a sampling period is at least 70 percent and at most 95 percent.

6. A signal detection system as in claim 1, wherein said third parameter value is determined based upon a state transition value which is characteristic of a specific modulation scheme.

7. A signal detection system as in claim 1, wherein said active signal and said null detect signal comprise a binary output.

8. A signal detection system as in claim 1, wherein said first parameter value is based upon an ambient noise signal level in said first plurality of signals.

9. A non-transitory computer-readable medium for use in a computing system to detect target signals in a first plurality of signals, the computer-readable medium comprising:

a first processing sequence for obtaining acquisition parameters from a user with a user interface, the acquisition parameters including a first parameter value, a second parameter value and a third parameter value;

a second processing sequence adapted acquire a second plurality of signals corresponding to power levels of said first plurality of signals;

a third processing sequence to identify active video values and null values based on said second plurality of signals, wherein said active video values are relatively higher than said null values by said first parameter value;

a fourth processing sequence to determine active video values per unit time and null values per unit time;

a fifth processing sequence to output an active video signal if said active video values per unit time exceed said second parameter value;

a sixth processing sequence to output a null detect signal if said null values per unit time exceed said third parameter value; and

a seventh processing portion adapted to output a graphical display representing a plurality of first data and a plurality of second data, wherein said first data is said first plurality of signals which are determined to be one of said active video signal or a null detect signal, said second plurality of data is a respective orientation of each of said first data with respect to a fixed point, wherein each of said first data is displayed based on a respective or corresponding one of said second plurality of data.

10. A non-transitory computer-readable medium as in claim 9, wherein said second plurality of signals are generated by a crystal video receiver.

11. A non-transitory computer-readable medium as in claim 9, wherein said first parameter value is determined based upon a power differential between transition states of a phase shift keyed (PSK) modulated signal.

12. A non-transitory computer-readable medium as in claim 9, wherein said second parameter value is based upon a relationship between active video values and null values which is represented by a percentage of active video values over a sampling time period.

13. A non-transitory computer-readable medium as in claim 12, wherein said percentage of active video values over a sampling period is at least 70 percent and at most 95 percent.

14. A non-transitory computer-readable medium as in claim 9, wherein said third parameter value is determined based upon a state transition value which is characteristic of a specific modulation scheme.

15. A non-transitory computer-readable medium as in claim 9, wherein said acquisition parameters include at least one of number of acquisitions, time between acquisitions, module type, receiver identification number, statistic, maximum, minimum, load instruction, save instruction, and start instruction.

16. A non-transitory computer-readable medium as in claim 9, wherein said first plurality of signals are transmitted in a transmission sequence, and wherein said acquisition parameters are configured to acquire said second plurality of data in a detection sequence based on said transmission sequence.

17. A non-transitory computer-readable medium as in claim 16, wherein said first plurality of signals are transmitted in a plurality of orientations related to said transmission sequence, further including a eighth processing portion adapted to output a graphical display representing a relationship between intensities of said second plurality of signals and said plurality of orientations.

27

18. A non-transitory computer-readable medium as in claim 17, wherein said intensities are represented by indicia corresponding to intensity ranges.

19. A non-transitory computer-readable medium as in claim 17, further including cutout orientations, wherein said graphical display distinguishes intensities corresponding to cutout orientations from intensities not corresponding to cutout orientations.

20. A method of detecting a target signal in a first plurality of signals comprising the steps of:

receiving a second plurality of signals based upon power levels of said first plurality of signals;

receiving a first parameter value, a second parameter value and a third parameter value with a user interface;

identifying active video values and null values in said second plurality of signals, wherein said active video values are relatively higher than said null values by said first parameter value;

determining active video values per unit time and null values per unit time;

generating an active video signal if said active video values per unit time exceed said second parameter value;

generating a null detect signal if said null values per unit time exceed said third parameter value;

28

generating a user interface portion for receiving at least one of said first parameter value, second parameter value and third parameter value from a user and selectively displaying at least one of said first, second and third parameter values; and

generating a user interface adapted to display intensity and an orientation of said first plurality of signals which are determined to be an active signal or null detect signal with respect to a fixed point.

21. A method as in claim 20, wherein said second plurality of signals are generated by a crystal video receiver.

22. A method as in claim 20, wherein said first parameter value is determined based upon a power differential between transition states of a phase shift keyed (PSK) modulated signal.

23. A method as in claim 20, wherein said second parameter value is determined based upon a relationship between active video values and null values which is represented by a percentage of active video values over a sampling time period.

24. A method as in claim 20, wherein said third parameter value is determined based upon a state transition value which is characteristic of a specific modulation scheme.

\* \* \* \* \*