



US 20130025112A1

(19) **United States**

(12) **Patent Application Publication**
Clifton et al.

(10) **Pub. No.: US 2013/0025112 A1**

(43) **Pub. Date: Jan. 31, 2013**

(54) **VEHICLE AND MAST MOUNTING ASSEMBLY THEREFOR**

Related U.S. Application Data

(62) Division of application No. 12/696,856, filed on Jan. 29, 2010, now Pat. No. 8,276,325.

(71) Applicants: **Christopher Clifton**, Bloomfield, IN (US); **Dean L. Jones**, Bloomington, IN (US); **Philip S. Mitchell**, Springville, IN (US); **David Myers**, Bloomfield, IN (US); **James M. Pruett**, Montgomery, IN (US)

Publication Classification

(51) **Int. Cl.**
B23P 11/00 (2006.01)
(52) **U.S. Cl.** **29/525.08**; 29/428


(72) Inventors: **Christopher Clifton**, Bloomfield, IN (US); **Dean L. Jones**, Bloomington, IN (US); **Philip S. Mitchell**, Springville, IN (US); **David Myers**, Bloomfield, IN (US); **James M. Pruett**, Montgomery, IN (US)

(57) **ABSTRACT**

A vehicle is disclosed having a mast assembly mounted to a sidewall of the vehicle. The mast is pivotally mounted and can be held in a first stowed position by way of a first clamp member. The mast is pivotal relative to the sidewall, to an essentially vertical and erect position, and held in the second position by way of a second clamp.

(21) Appl. No.: **13/623,561**

(22) Filed: **Sep. 20, 2012**

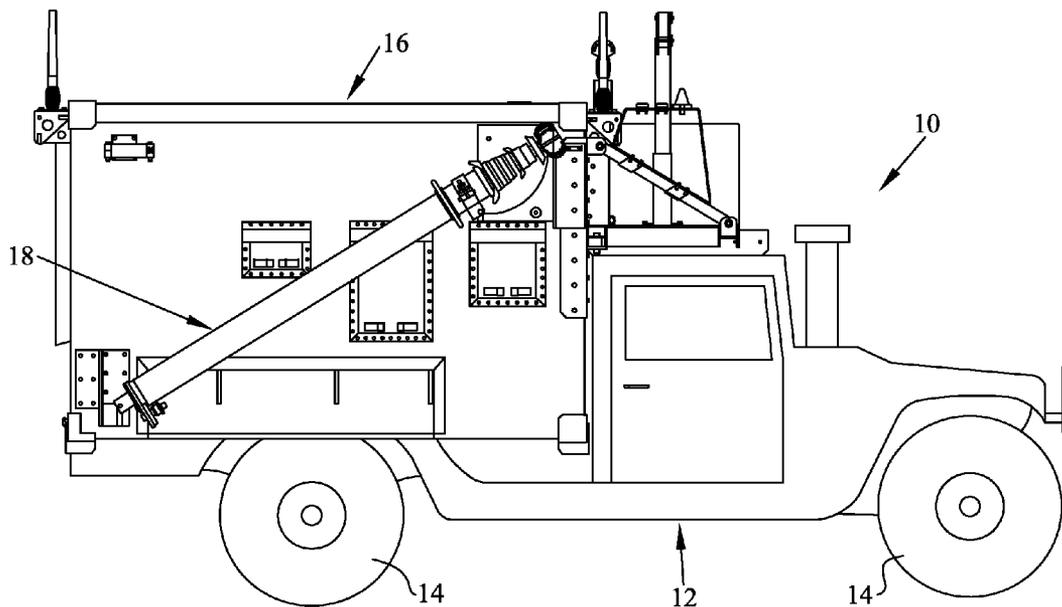

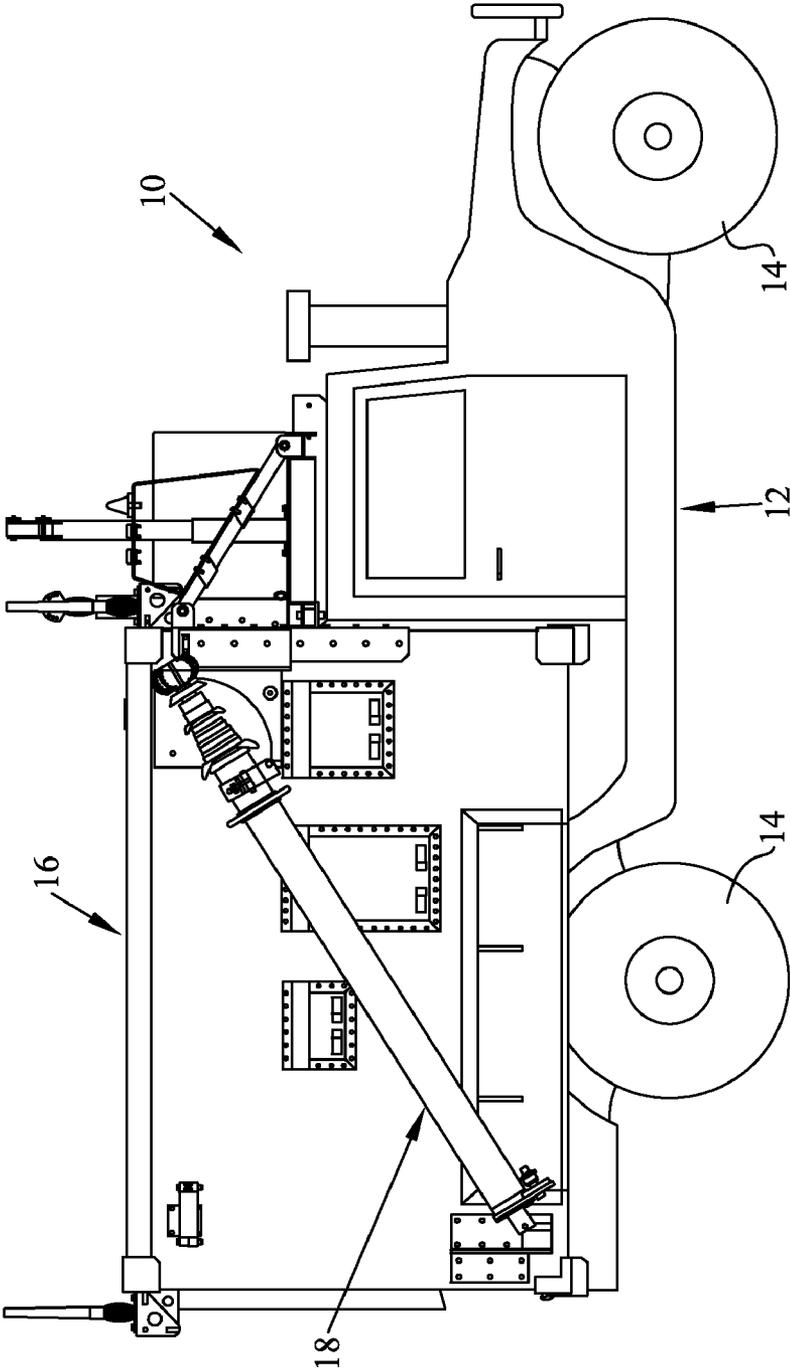


FIG. 1

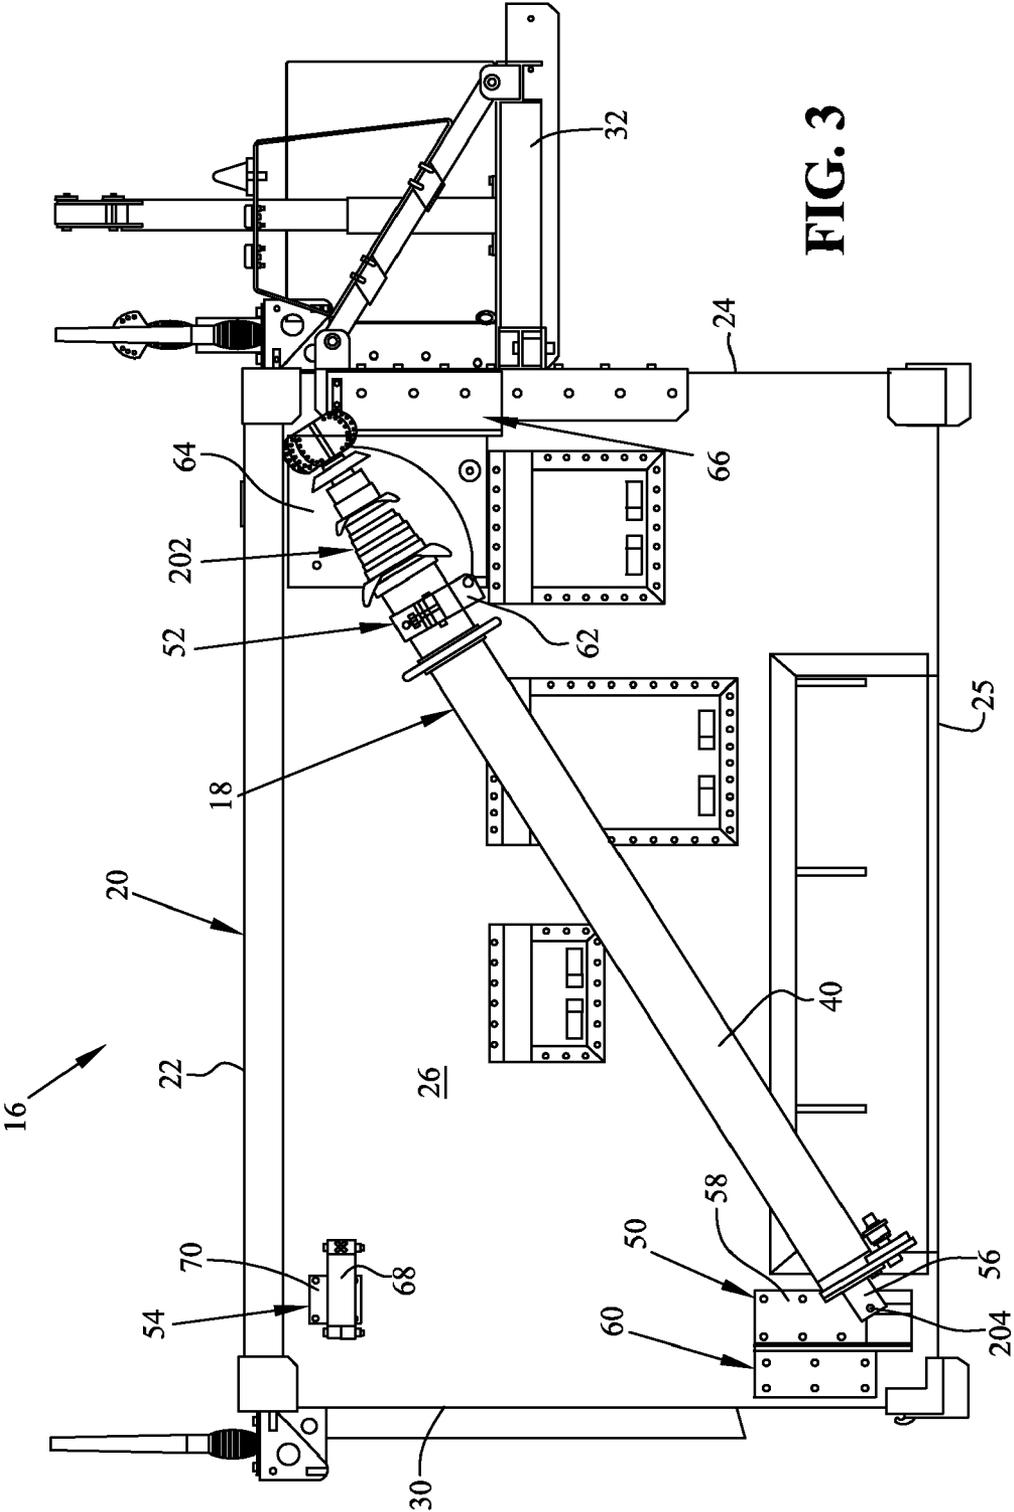


FIG. 3

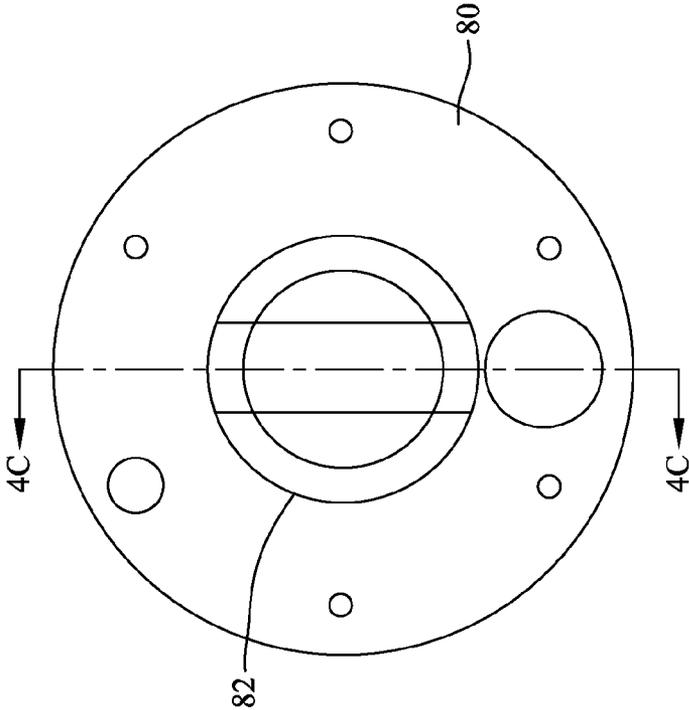


FIG. 4A

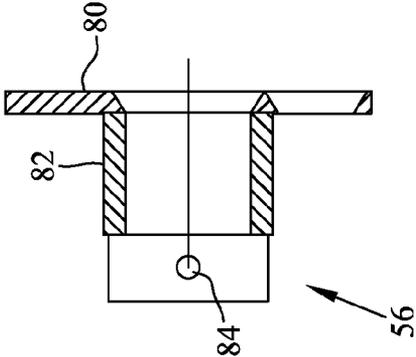


FIG. 4C

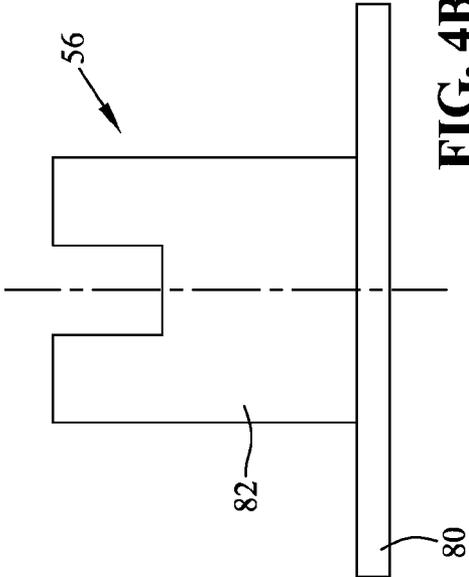


FIG. 4B

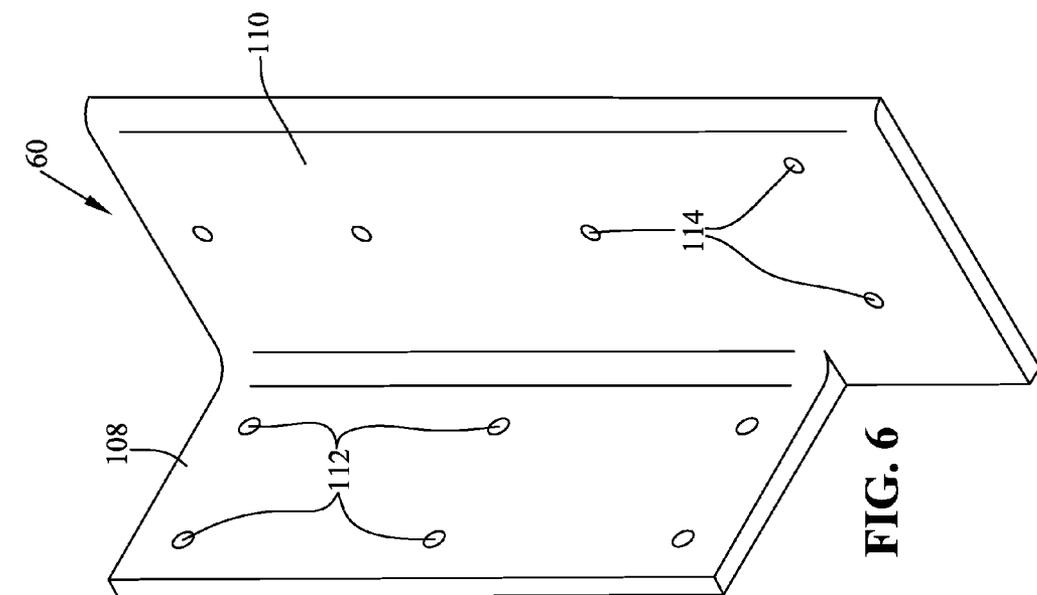


FIG. 6

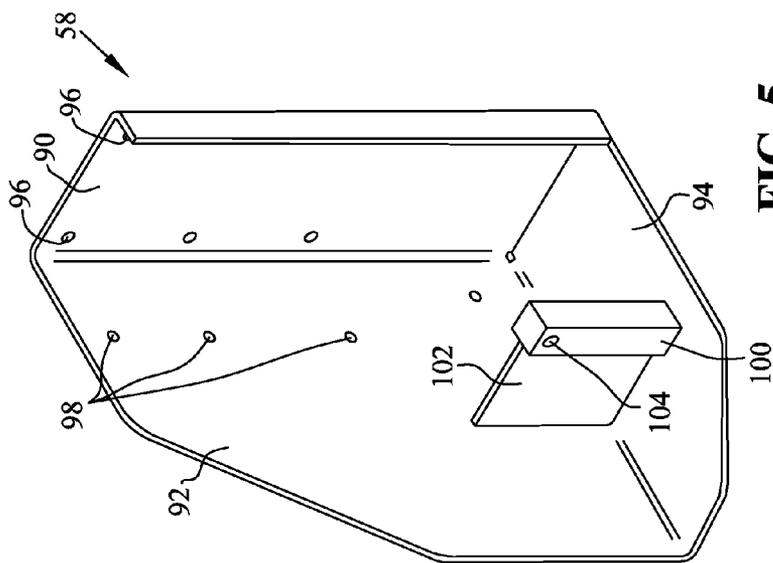


FIG. 5

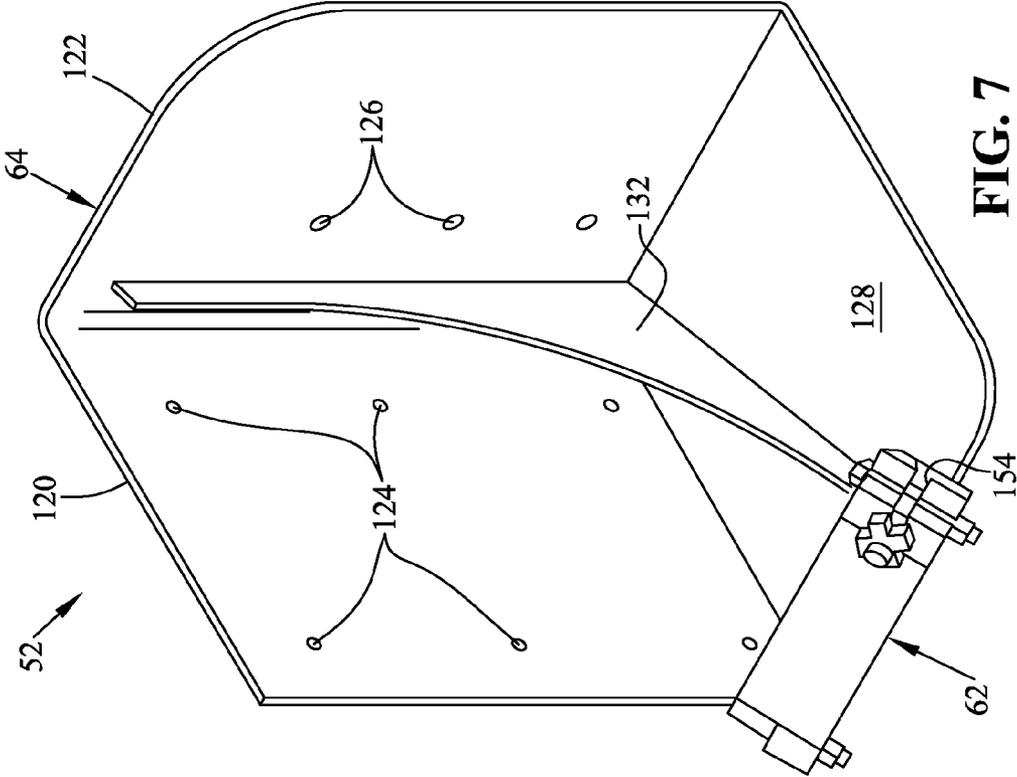


FIG. 7

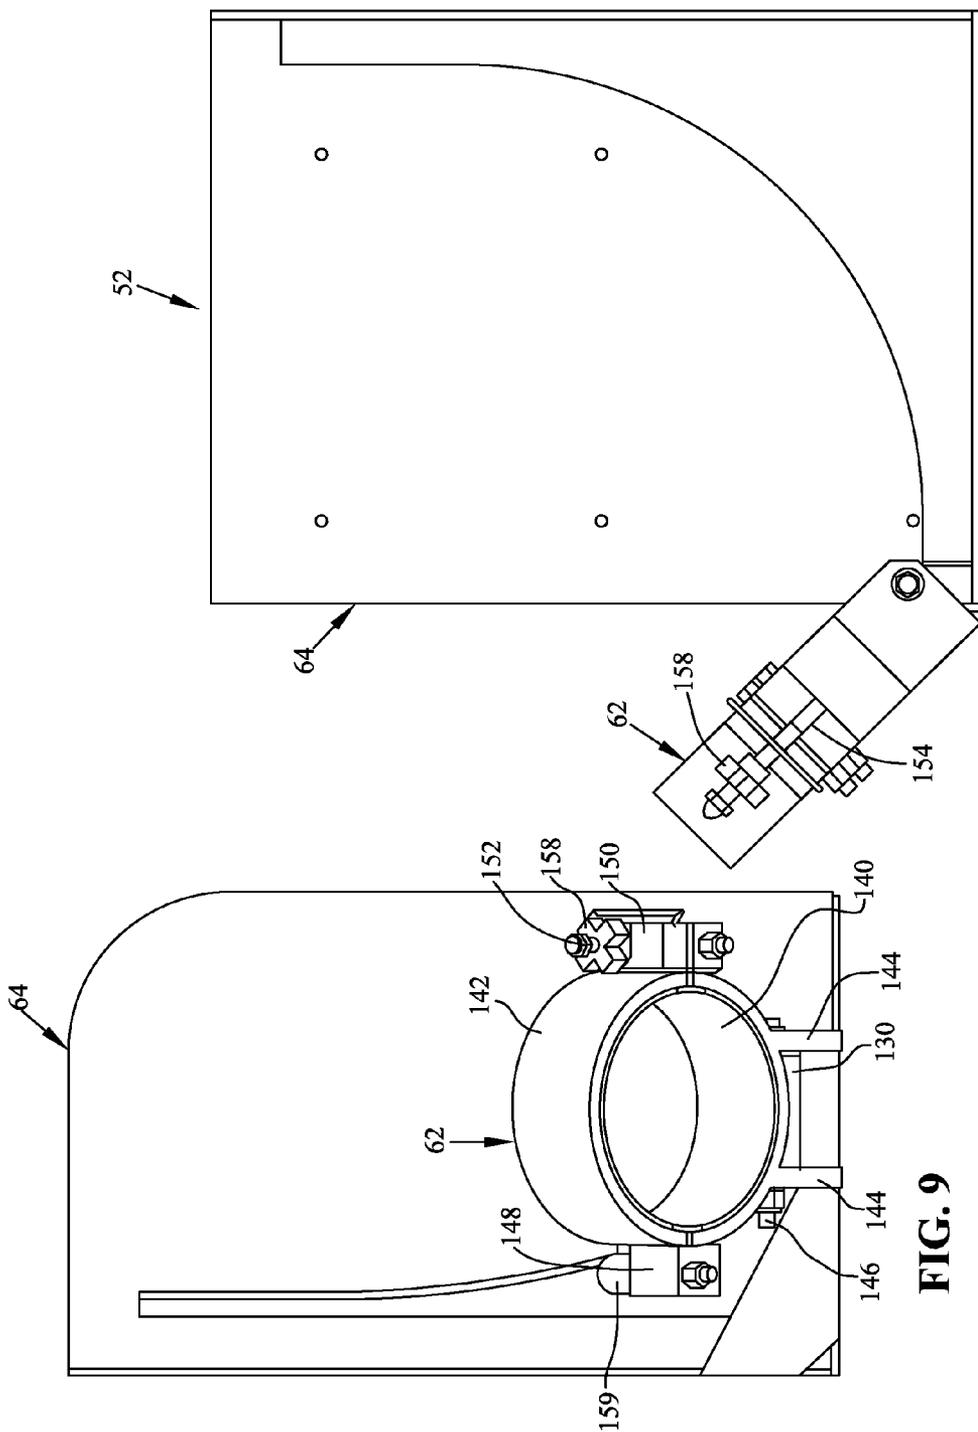


FIG. 8

FIG. 9

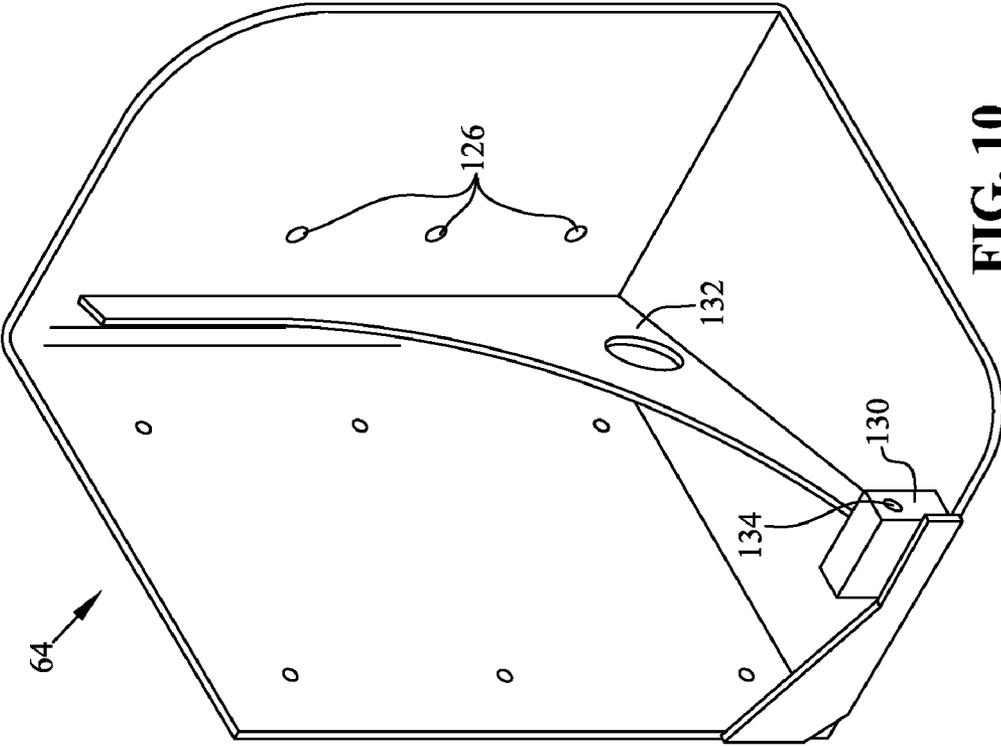


FIG. 10

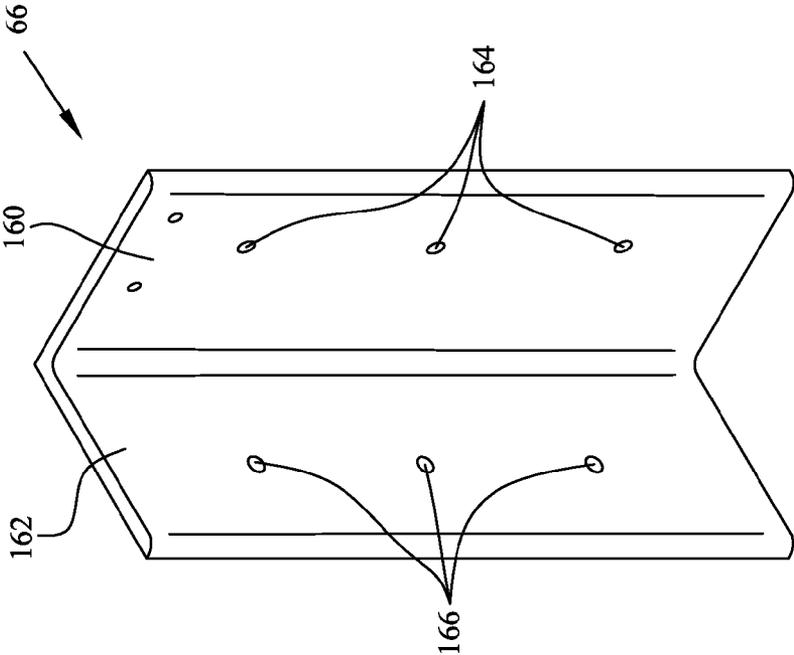


FIG. 11

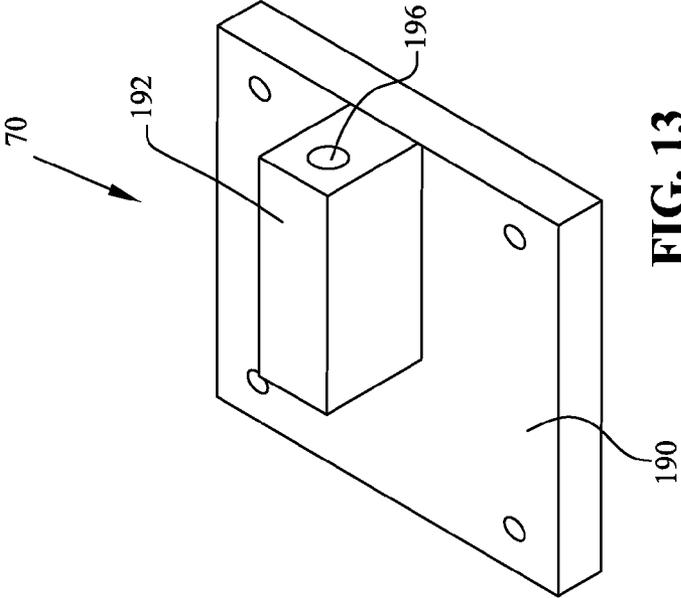


FIG. 13

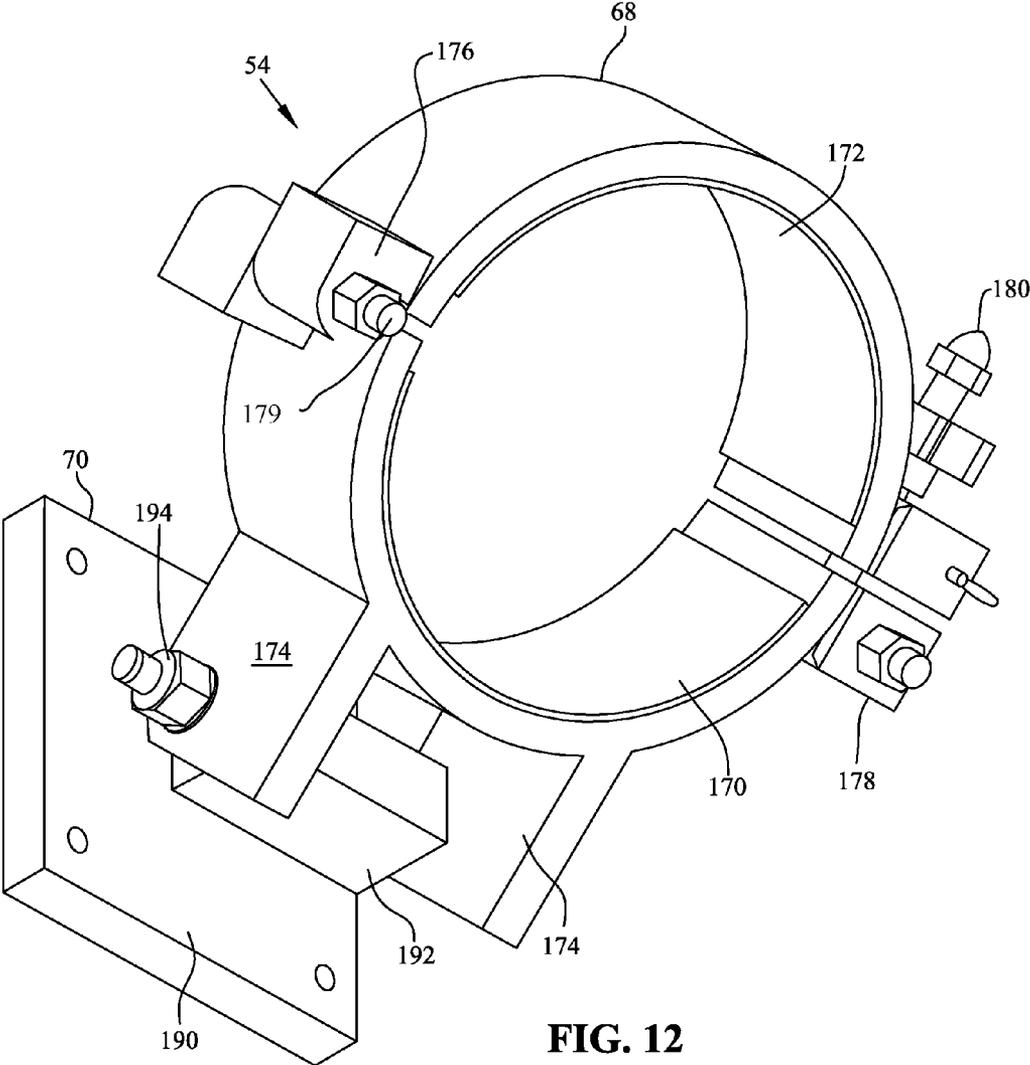


FIG. 12

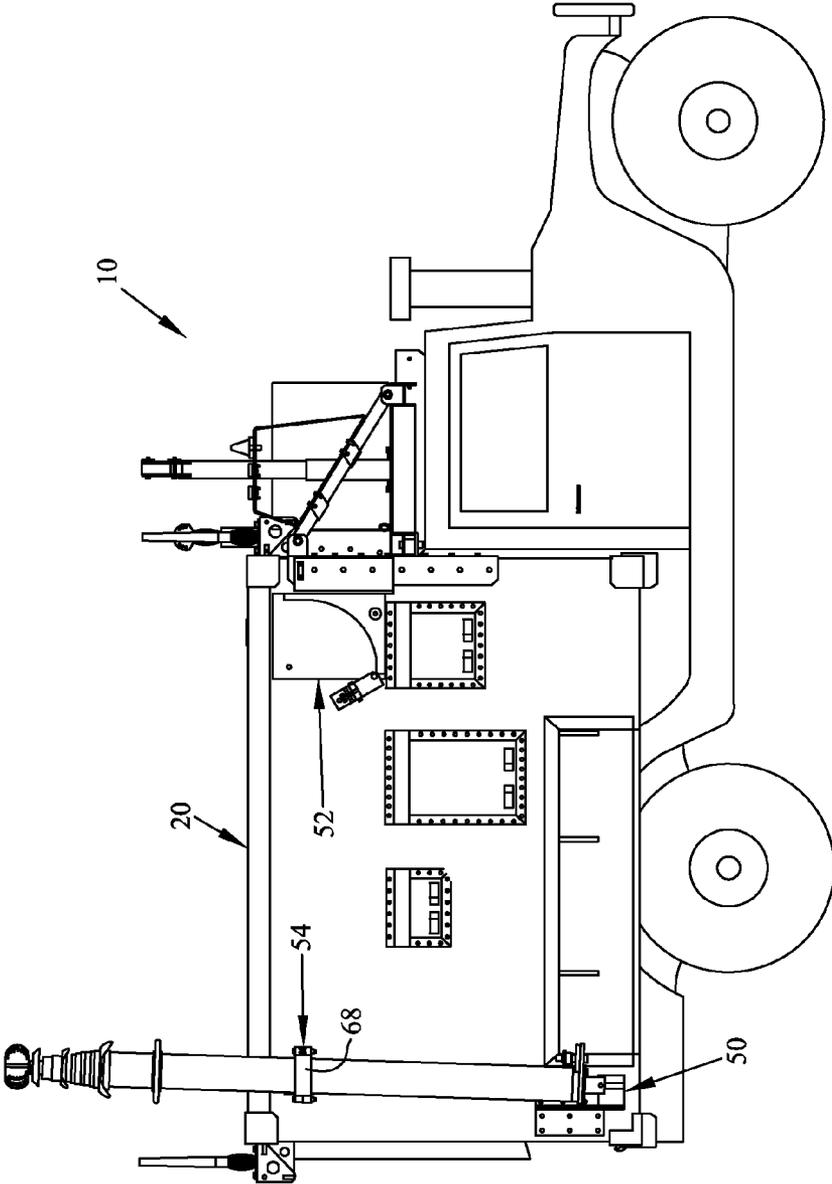


FIG. 14

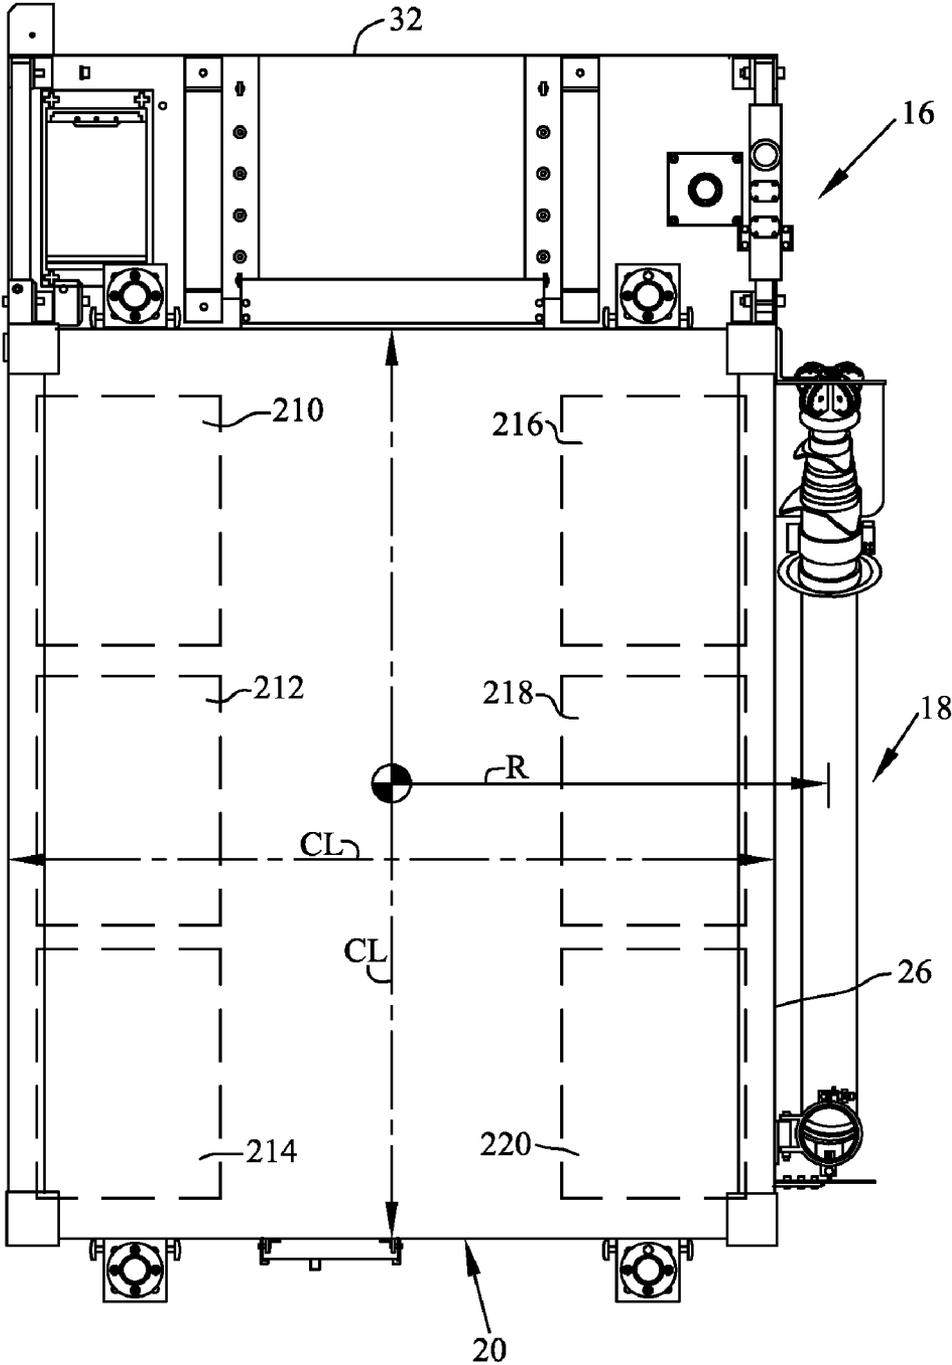


FIG. 15

VEHICLE AND MAST MOUNTING ASSEMBLY THEREFOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present divisional application claims priority to U.S. patent application Ser. No. 12/696,856, filed Jan. 29, 2010, entitled "VEHICLE AND MAST MOUNTING ASSEMBLY THEREFOR," which claims priority to U.S. Provisional Patent Application Ser. No. 61/291,694, filed Dec. 31, 2009, entitled "VEHICLE AND MAST MOUNTING ASSEMBLY THEREFOR," the disclosures of which are expressly incorporated by reference herein.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] The invention described herein was made in the performance of official duties by employees of the Department of the Navy and may be manufactured, used and licensed by or for the United States Government for any governmental purpose without payment of any royalties thereon.

BACKGROUND OF THE INVENTION

[0003] Oftentimes it is necessary in the commercial and military communications field to carry antenna masts for the use of receiving radio frequency signals. These masts are generally telescopic and can be either standalone or vehicle mounted.

[0004] The standalone masts can be carried in bags and removed at the point of use and manually erected, having guy wires for maintaining the mast in an upright position. Typically, the vehicle mounted masts are also held by guy wires, as the masts are telescopically extendable from a collapsed length of 8-10 feet to an erected height of 20-100 feet.

[0005] The vehicle mounted masts tend to be cumbersome and raise the vehicle height or weight substantially. In the case of military vehicles, both height (vertical clearance) and weight are important as oftentimes, the entire vehicles are shipped via aircraft.

SUMMARY OF THE INVENTION

[0006] In one embodiment, a mast assembly comprises a mast having a pivot end and an extendable end; a pivot connection assembly for attachment to the mast pivot end; a first clamp assembly for clamping retention of the mast in a stowed position; and a second clamp assembly for clamping retention of the mast in an erect position.

[0007] The assembly could be wall mounted where the pivot connection assembly pivotally attaches the mast to the wall; and the first and second clamp assemblies are also attached to the wall. The assembly could also be in the form of a mast mounting assembly, comprising a pivot connection assembly for a mast, the pivot connection member comprising a first portion fixable to a structure, a second portion fixable to a mast, and a pivot section interconnecting the first and second portions; a first clamp member for retention of the mast in a stowed position; and a second clamp member for retention of the mast in an erect position. The assembly could also be attached to a vehicle, where the vehicle has a frame; ground engaging members supporting the frame; and a propulsion mechanism for propelling the ground engaging members. The wall could be a vehicle sidewall. A method of

making a transportable mast and a method of erecting a transportable mast are also described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a side view of the vehicle of the present disclosure;

[0009] FIG. 2 is a front left perspective view of the shelter carried by the vehicle of FIG. 1;

[0010] FIG. 3 is a right side view of the shelter shown in FIG. 2 showing the mast in the stowed position;

[0011] FIG. 4A shows a top view of the pivot member for attachment to the mast;

[0012] FIG. 4B shows a side view of the pivot member of FIG. 4A;

[0013] FIG. 4C shows a cross-sectional view of the pivot member through lines 4C-4C of FIG. 4A;

[0014] FIG. 5 shows the bracket member of the pivot connection assembly;

[0015] FIG. 6 shows the backup bracket for the pivot bracket shown in FIG. 5;

[0016] FIG. 7 shows a clamp assembly for attachment to a shelter and for retaining the mast in a stowed position;

[0017] FIG. 8 shows a front view of the clamp assembly of FIG. 7;

[0018] FIG. 9 shows an end view of the clamp assembly of FIG. 7;

[0019] FIG. 10 shows the bracket member of the clamp assembly of FIG. 7;

[0020] FIG. 11 shows a perspective view of the backup bracket for the clamp assembly of FIG. 7;

[0021] FIG. 12 shows a clamp assembly for attachment to a shelter and for retaining the mast in an erect position;

[0022] FIG. 13 shows the bracket portion of the clamp assembly of FIG. 12;

[0023] FIG. 14 is a view similar to that of FIG. 1, showing the mast in a second position, erect position, prior to the telescopic extension; and

[0024] FIG. 15 shows up an upper plan view of the shelter with the internal equipment shown diagrammatically.

DETAILED DESCRIPTION OF THE EMBODIMENT

[0025] With reference first to FIG. 1, a vehicle 10 is disclosed which as disclosed is depicted as a truck, and more particularly as a military vehicle. It should be understood that the disclosure is equally applicable to commercial vehicles for use, for example, in radio or TV broadcasting or in any other application in which an extendable mast is used.

[0026] As shown, vehicle 10 comprises a frame 12, and ground engaging members 14 which support the frame 12. As depicted, the ground engaging members are shown as tires and wheels, however it should be understood that other ground engaging members such as tracks or skis could be employed. The invention is equally applicable to any water flotation devices. As shown, a shelter assembly 16 is supported by the vehicle frame 12 and includes a mast assembly 18 which will be described in greater detail herein.

[0027] With respect now to FIGS. 2 and 3, shelter assembly 16 is shown in greater detail. Shelter assembly 16 includes an enclosure 20 having a top wall 22, a front wall 24, lower edge 25 (FIG. 3), side walls 26, 28 and rear wall 30. Shelter assembly 16 could also include a front work platform 32 including

a hoist **34**, as well as a plurality of antennas positioned around enclosure **20** and shown generally at **36**.

[0028] As shown best in FIG. 3, mast assembly **18** is comprised of a mast **40** as well as a mast mounting assembly. Mast mounting assembly is comprised of pivot connection assembly **50**, a first connection assembly **52** and a second connection assembly **54**. First connection assembly **52** and second connection assembly **54** are in the form of clamp assemblies as described herein.

[0029] Pivot connection assembly **50** includes a pivot mount member **56**, fixed to the bottom of the mast **40**, and a bracket member **58**, to which the pivot mount member rotates, as described herein. A backup bracket **60** is positioned against bracket member **58** as described herein. Connection assembly **52** is defined as a clamp assembly including a clamp **62** and a bracket **64**. A backup bracket **66** is positioned against bracket **64** as described herein. Connection assembly **54** is defined as a clamp assembly including a clamp member **68** and a bracket member **70**.

[0030] With respect now to FIGS. 4A-4C, pivot mount member **56** includes a flange **80** for attachment to the end of mast **40** and a cylindrical extension portion **82** for connection to pivot bracket **50**. Extension portion **82** includes apertures such as **84** for receiving a fastener as described herein.

[0031] As shown in FIG. 5, bracket **58** includes a back wall **90**, side wall **92** and lower wall **94**. Back wall **90** includes a plurality of apertures **96** for connection to side wall **26** (FIG. 3) and side wall **92** includes a plurality of apertures **98** for connection to backup bracket **60**. Bracket **58** further comprises a pivot block **100** upstanding from lower wall **94** and spaced apart from side wall **92** by way of a spacer rib **102**. Pivot block **100** includes an aperture **104** for alignment with aperture **84** (FIG. 4C) of pivot member **56**, as described herein.

[0032] With respect to FIG. 6, backup bracket **60** includes a back wall **108** for attachment to shelter side wall **26** and a side wall **110** for placement against side wall **92** of bracket **58**. Wall **108** includes apertures **112** for attachment to side wall **26** and wall **110** includes apertures **114** which match in template form with apertures **98** on wall **92** (FIG. 5), for attachment to side wall **92** of bracket **58**.

[0033] With reference now to FIGS. 7-10, connection assembly **52** will be described. As shown in FIG. 7, bracket **64** includes back wall **120** and side wall **122**. Back wall **120** has apertures **124** for attachment to side wall **26**, whereas side wall **122** has apertures **126**, for attachment to back-up bracket **66**. Bracket **64** further includes a lower wall **128** which retains a pivot block **130** (FIG. 10) with a spacer rib **132** positioned between spacer block **130** and side wall **122**. Spacer block **130** includes an aperture **134** extending therethrough for retaining clamp **62**, as described herein.

[0034] With reference now to FIG. 9, clamp **62** is in the form of semi-cylindrical halves **140** and **142** where half **140** includes pivot feet **144** which flank pivot block **130** (FIG. 9) having a fastener **146** extending therethrough. Meanwhile, clamp halves **140** and **142** are pivotally attached at side **148** and are clamped at side **150** by way of a swing bolt **152** which swings through a slot **154** (FIGS. 7 and 9) in the clamp halves **140**, **142**. It should be understood that swing bolt **152** includes a threaded star wheel **158**, which when loosened, allows swing bolt **152** to rotate through slot **154**, whereupon clamp half **142** may pivot open about fastener **159**.

[0035] With reference now to FIG. 11, back-up bracket **66** is shown having plates **160**, **162** having apertures **164**, **166** respectively, as more fully described below.

[0036] With reference now to FIGS. 12 and 13, clamp assembly **54** is shown having clamp halves **170** and **172** where clamp half **170** includes pivot feet **174**. Clamp halves **170** and **172** rotate about side **176** and lock about side **178** in a virtually identical manner as described above with respect to clamp **62**. Thus, side **178** includes a swing bolt **180** which can be loosened to allow clamp half **172** to rotate about side **176** and more particularly about fastener **179**. Bracket **70** includes flange **190** for attachment to side wall **26** and a pivot block **192** for mounting pivot feet by way of fastener **194** through aperture **196** (FIG. 13).

[0037] As shown, mast **40** is telescopic, and includes a plurality of coaxially extendable sections **202** (FIG. 3). Mast could be of the type offered by The WILL-BURT Company of Orrville Ohio, as one of their quick erecting antenna masts (QEAM).

[0038] As described above, the mast assembly **18** is assembled by attaching bracket member **58** to sidewall **26** as shown in FIG. 3. Back-up bracket **60** is then attached to sidewall **26** and to bracket member **58**. It should be understood that plate **92** (FIG. 5) would be positioned adjacent to plate **110** (FIG. 6) with apertures **98**, **114** aligned. Fasteners could then be inserted to secure the bracket **58** and back-up bracket **60** together. Pivot mount member **56** is then attached to mast **40**, and pivot mount member **56** is rotatably secured to bracket member **58** by way of a fastener **204** (FIG. 3). Connection assembly **52** may then be attached to sidewall **26** and to back-up bracket **66**. As such, bracket **64** is positioned adjacent to sidewall **26** and fasteners are inserted through apertures **124** (FIG. 7). Back-up bracket **66** is then positioned with plate **160** against sidewall **26** and plate **162** adjacent to wall **122**, with apertures **166** (FIG. 11) aligned with apertures **126** (FIG. 7). Finally, connection assembly **54** is attached to sidewall **26** with bracket **70** attached to sidewall **26**.

[0039] To stow the mast **40**, mast **40** is positioned in FIG. 3, with clamp halves **140**, **142** encompassing the mast **40**, and with swing bolt **152** (FIG. 9) in the locked position. As shown in the stowed position of FIG. 3, mast is confined within the envelope of the sidewall **26**, that is, it extends diagonally from corner to corner, but between front wall **24**, rear wall **30**, top wall **22**, and lower edge **25**. In this configuration, the vehicle **10** can be maneuvered from place to place with mast **40** in the stowed position. Vehicle **10** may also be loaded onto transport vehicles such as cargo planes as the mast in the stowed position is lower than the top wall **22** of the vehicle.

[0040] When the vehicle arrives at a site where the antenna needs to be erected, clamp **62** is released and mast **40** is rotated counterclockwise (as viewed in FIG. 14) to clamp **68**. Clamp halves **170** and **172** are then positioned around mast **40**, and swing bolt **170** is locked to tighten clamp member around mast **40**. Mast **40** may then be erected according to the mast specifications, for example, by jack screw or pneumatic activation.

[0041] With reference to FIG. 15, mast assembly **18** extends outwardly from sidewall **26**, and extends a distance "R" from the lateral centerline of the shelter **20**. The shelter includes electronic equipment, for example radio transmission equipment. This equipment could be mounted to the inside of the shelter walls, or could be provided on electronic racks. This equipment is shown diagrammatically, as items **210-220** in FIG. 15. This equipment is arranged for its weight

distribution, such that the center of gravity is laterally and longitudinally centered with the shelter, as shown in FIG. 15. Said differently, the location of items 210-220 is such as to compensate for the offset mass position of the mast assembly 18.

[0042] It should be appreciated from the disclosure that the elements of the pivot connection assembly 50, first connection assembly 52 and second connection assembly 54 are constructed of suitable materials for the application, and as shown are steel members, such as steel plate, steel channels, steel tubes, etc. However these items could be comprised of any alloys or composites suitable for the use as described. The connection of the various members is done by a typical connection technology such as welding, but fasteners, bonding etc. could also be employed. The pivot connection assembly 50, first connection assembly 52 and second connection assembly 54 are also described as held to the shelter enclosure 20 by way of fasteners, but it should be appreciated that the bracket members could be fixed to the shelter by way of welding or other suitable fastening techniques. In addition some of the components, such as the brackets themselves could be integrated into the shelter sidewall 26 altogether. These and other variants should be appreciated readily to one skilled in the art.

[0043] While this invention has been described as having an exemplary design, the present invention may be further

modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains.

1.-30. (canceled)

31. A method of making a transportable mast, comprising the steps of:

pivotaly mounting a mast to a sidewall of a vehicle;
providing a first connection assembly for retention of the mast in a stowed position; and
providing a second connection assembly for retention of the mast in an erect position.

32. The method of claim 31, wherein the step of providing first and second connection assembly comprises attaching first and second clamp assemblies to the sidewall of the vehicle.

33. The method of claim 32, wherein the first clamp assembly is attached to the vehicle sidewall such that the mast is stowed diagonally across the sidewall.

34. The method of claim 33, wherein the second clamp assembly is attached to the vehicle sidewall such that the mast is erected vertically relative to the sidewall.

35.-40. (canceled)

* * * * *