



US008283562B2

(12) **United States Patent**
Clifton et al.

(10) **Patent No.:** **US 8,283,562 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **ELECTRICAL INTERFACE ASSEMBLY**

(56) **References Cited**

(75) Inventors: **Christopher Clifton**, Bloomfield, IN (US); **Dean L. Jones**, Bloomington, IN (US); **Philip S. Mitchell**, Springville, IN (US); **David Myers**, Bloomfield, IN (US); **James M. Pruett**, Montgomery, IN (US)

(73) Assignee: **The United States of America as represented by the Secretary of the Navy**, Washington, DC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 350 days.

(21) Appl. No.: **12/696,787**

(22) Filed: **Jan. 29, 2010**

(65) **Prior Publication Data**
US 2011/0155412 A1 Jun. 30, 2011

Related U.S. Application Data
(60) Provisional application No. 61/291,694, filed on Dec. 31, 2009.

(51) **Int. Cl.**
H02G 3/18 (2006.01)
(52) **U.S. Cl.** **174/59**; 174/53; 174/57; 174/58; 220/3.2; 220/3.3; 312/300; 312/324; 361/600; 361/724; 361/730; 361/752
(58) **Field of Classification Search** 174/50, 174/58, 59, 520, 559, 480, 66, 67; 439/535; 248/906; 220/4.02; 333/181-185; 361/600, 361/724, 730, 752; 312/223.1, 223.2, 223.3, 312/223.6

See application file for complete search history.

U.S. PATENT DOCUMENTS

1,919,986 A *	7/1933	Powers	312/100
3,858,091 A	12/1974	Wilkinson	
3,960,353 A	6/1976	Leutwyler	
4,460,895 A	7/1984	Bert et al.	
4,496,057 A	1/1985	Zenitani et al.	
4,497,411 A	2/1985	DeBortoli	
4,746,263 A	5/1988	Cook	
4,792,881 A	12/1988	Wilson et al.	
4,802,008 A	1/1989	Walling	
4,815,757 A	3/1989	Hamilton	
4,871,103 A	10/1989	Martinson	
4,932,176 A	6/1990	Roberts et al.	
5,070,429 A	12/1991	Skirpan	

(Continued)

FOREIGN PATENT DOCUMENTS

GB 1 246 538 9/1971

OTHER PUBLICATIONS


The online materials information resource [Online] [retrieved on Mar. 27, 2012] Retrieved from the internet:<<http://www.handymanfixhomerepair.com/how-to-replace-electric-outlets/>>. Posted online on Sep. 15, 2009.*

(Continued)

Primary Examiner — Jinhee Lee
Assistant Examiner — Binh Tran
(74) *Attorney, Agent, or Firm* — Christopher A. Monsey

(57) **ABSTRACT**
An electrical interface assembly configured to be supported within a wall of a mobile structure. The electrical interface assembly includes a frame having spaced apart inner and outer supports. Panels including electrical connectors are removably supported by the inner and outer supports.

20 Claims, 24 Drawing Sheets

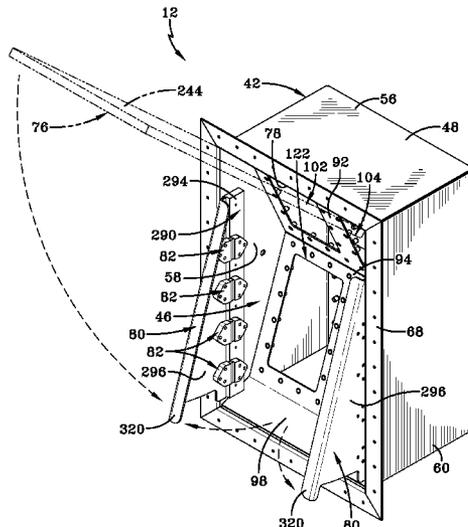

U.S. PATENT DOCUMENTS

5,229,925 A 7/1993 Spencer et al.
 5,239,129 A 8/1993 Ehrenfels
 5,272,279 A 12/1993 Filshie
 5,304,964 A * 4/1994 DiMarco 333/181
 5,328,260 A 7/1994 Beirise
 5,366,071 A 11/1994 Laszlo
 5,572,837 A 11/1996 Featherstone et al.
 5,615,855 A 4/1997 Marue et al.
 5,683,001 A 11/1997 Masuda et al.
 5,721,394 A 2/1998 Mulks
 5,743,635 A 4/1998 Hulse et al.
 5,778,612 A 7/1998 Kissinger et al.
 5,794,794 A 8/1998 Hull
 5,819,956 A 10/1998 Rinderer
 5,921,402 A 7/1999 Magenheimer
 6,152,048 A 11/2000 Vander Park
 6,201,687 B1 3/2001 Murray
 6,253,502 B1 7/2001 Layton
 6,260,310 B1 7/2001 Price et al.
 6,347,963 B1 2/2002 Falkenberg et al.
 6,466,431 B1 10/2002 Thomas
 6,497,442 B1 12/2002 Wacker
 6,546,677 B1 4/2003 Featherstone
 6,796,438 B2 9/2004 Mendoza
 6,964,463 B1 11/2005 Hindle et al.
 7,000,357 B1 2/2006 Stearns et al.
 7,017,760 B2 3/2006 Zuclich et al.
 7,045,706 B1 5/2006 Lincoln, III et al.
 7,080,865 B2 7/2006 Bergeron et al.
 7,265,292 B2 9/2007 Greenfield

7,462,777 B2 12/2008 Dinh
 7,479,598 B1 * 1/2009 Shotey et al. 174/58
 7,585,191 B2 * 9/2009 Hawley et al. 439/676
 2007/0102180 A1 5/2007 Brosig-Rodriguez et al.
 2008/0258931 A1 10/2008 Christensen et al.

OTHER PUBLICATIONS

Antenna Products PM Mast Series—"Telescopic Masts", retrieved from: <http://www.antennaproducts.com/telmasts.pdf>, pp. 42 and 43, Mineral Wells, TX.
 ArmyProperty.com, "Quick Erect Antenna Mast System (QEAM)," retrieved from <http://www.armyproperty.com/Equipment-Info/QEAM.htm> on Nov. 2, 2009, 4 pgs.
 Clark Masts Fast Erecting Mast Systems, "Mast Mounting," retrieved from http://www.clarkmasts.com/mast_mounting.php on Oct. 31, 2009, 1 pg.
 Floatograph Technologies, "Commercial Telescoping Masts," ©2008, retrieved from <http://www.telescopingmast.com> on Nov. 2, 2009, 24 pgs.
 Trival Antene d.o.o., "Teleopic Winch Driven Masts STV," retrieved from <http://www.trival-antennas-masts.com>, 4 pgs., Kamnik, Slovenia.
 Wenzlau Engineering, "Will-Burt Quick Erecting Antenna Masts," retrieved from <http://www.wenzlau.com/masts-qeam.htm> on Oct. 31, 2009, 2 pgs., Pasadena, CA.
 The Will-Burt Company, "Mast Installation Guide for External Mounting," at least as early as Nov. 2, 2009, p. 1, sheet 412 and p. 18.

* cited by examiner

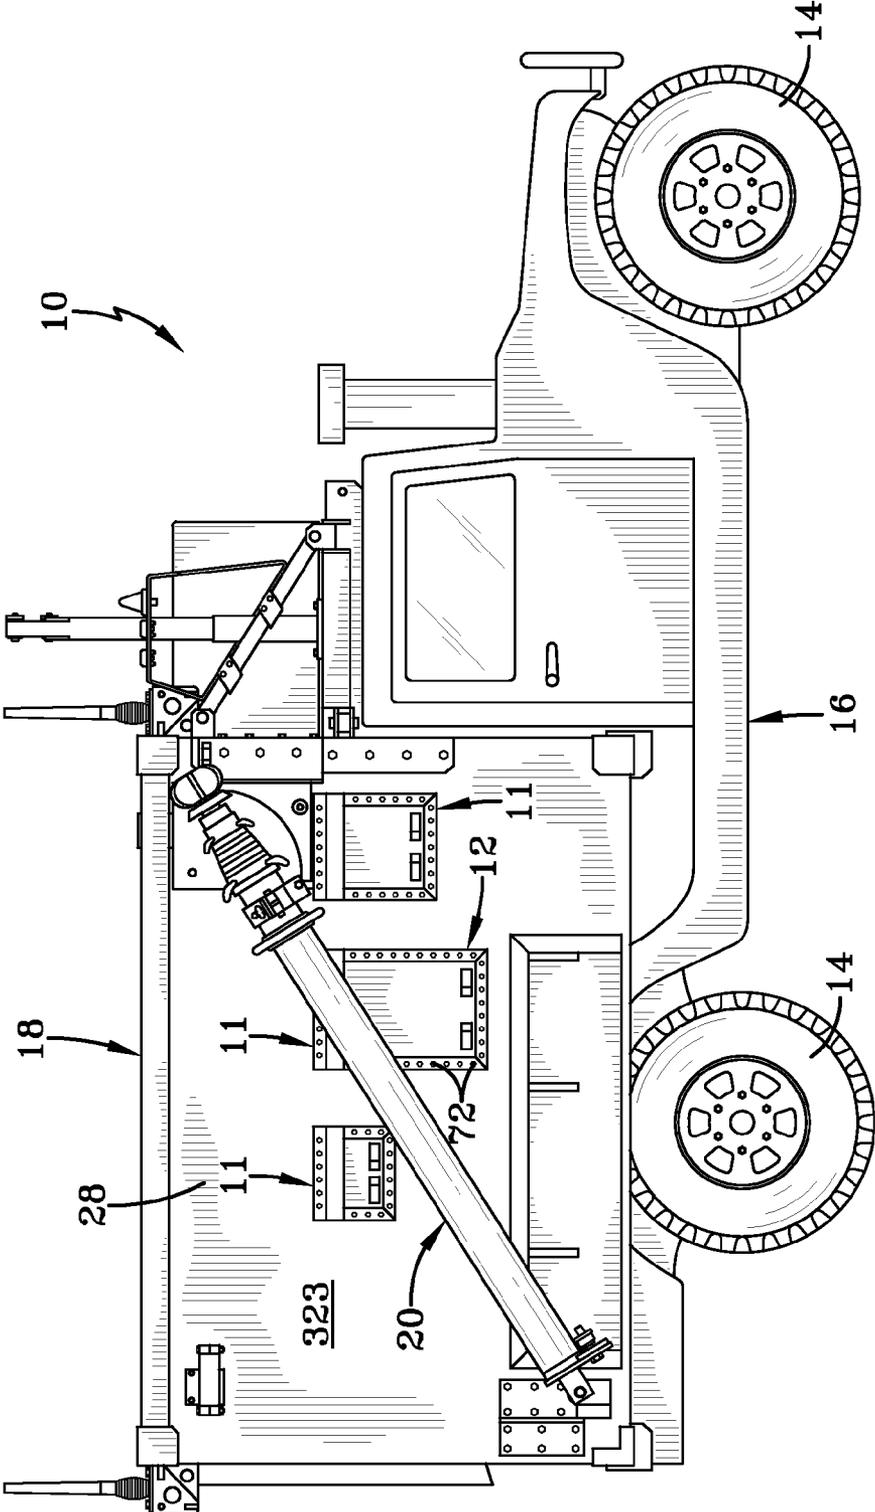


FIG-1

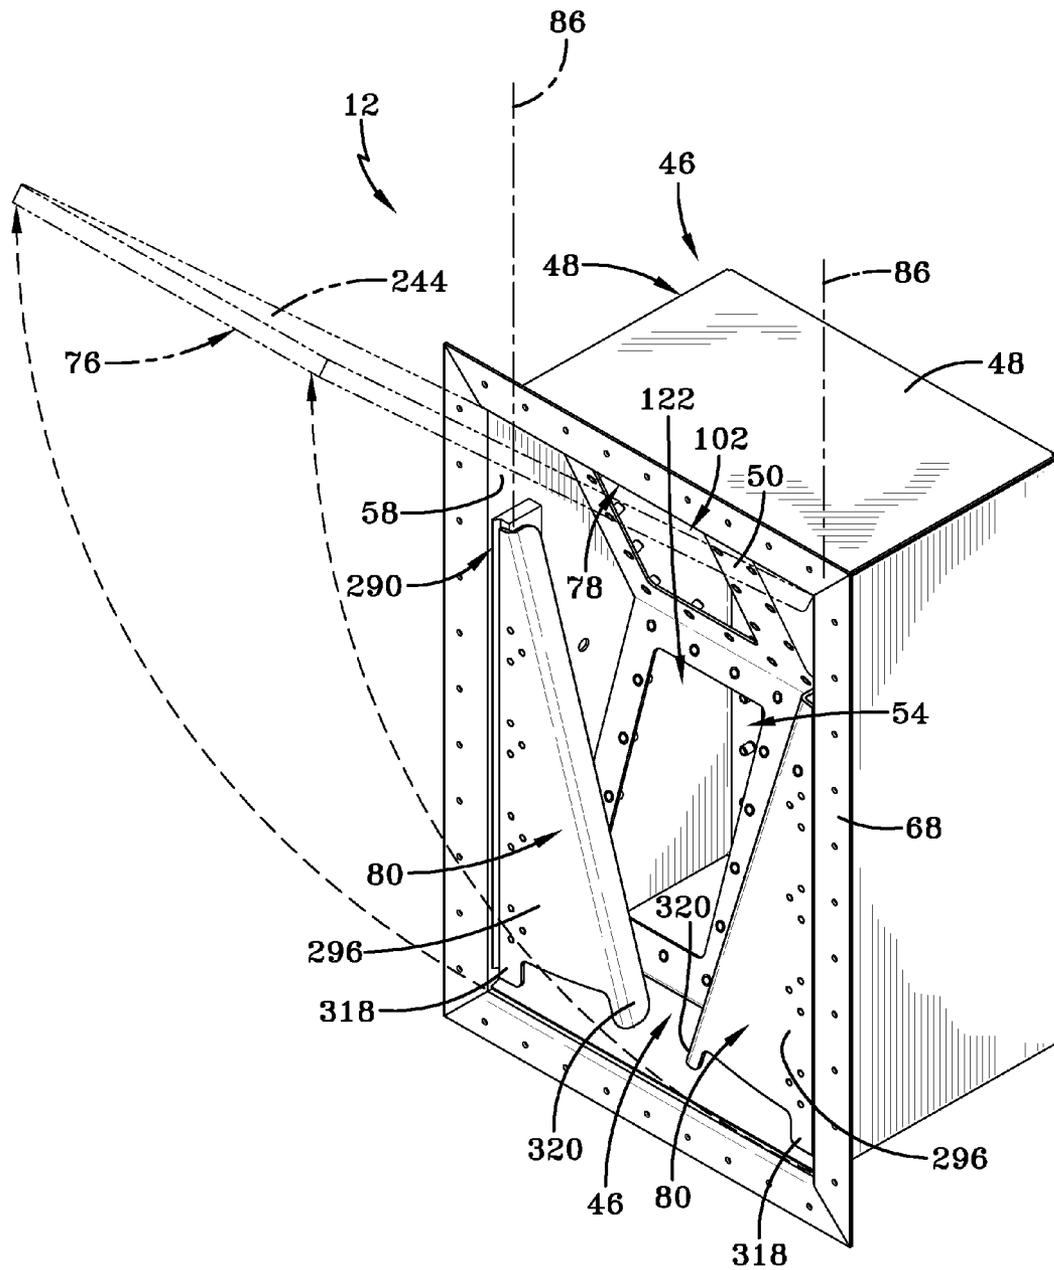


FIG-4

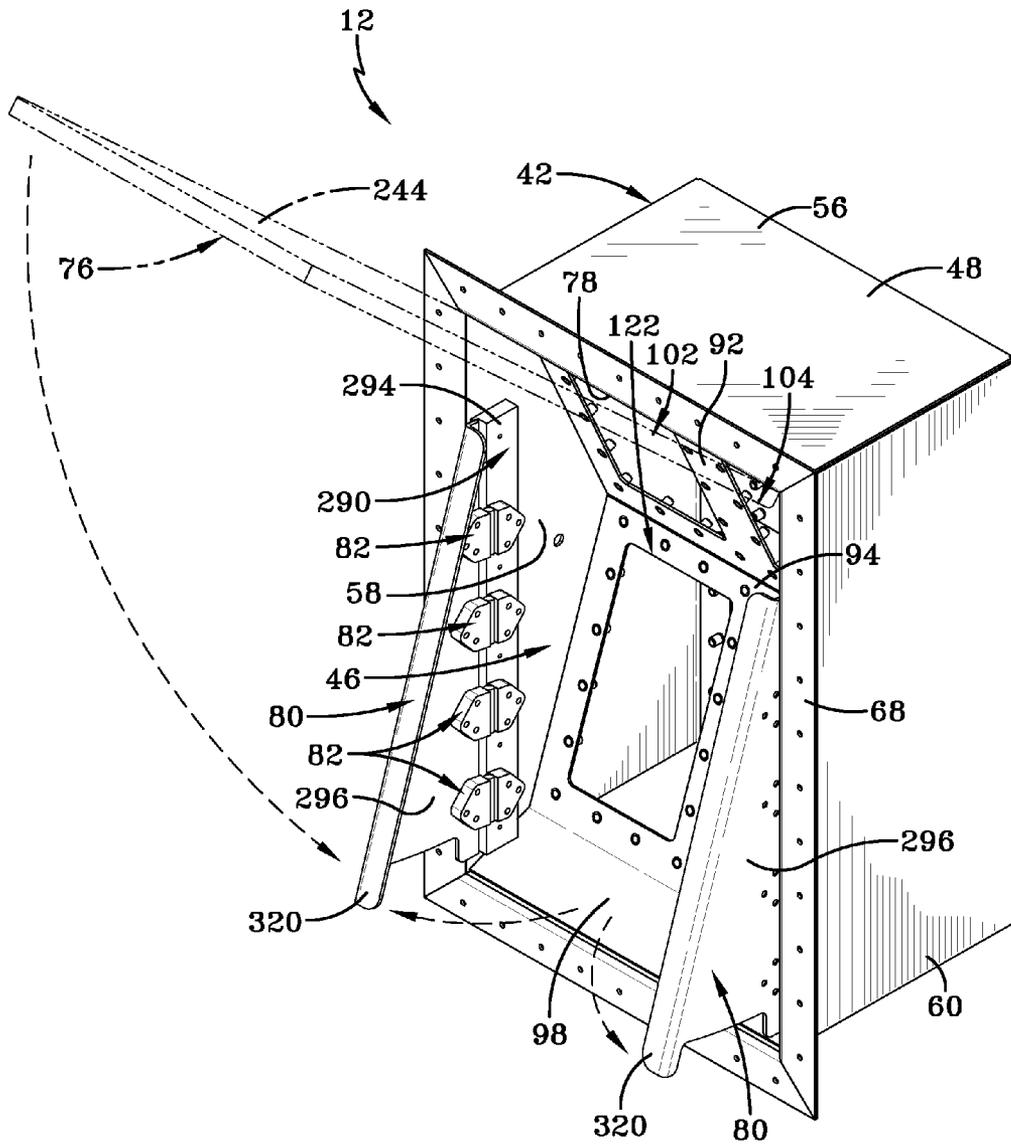


FIG-5

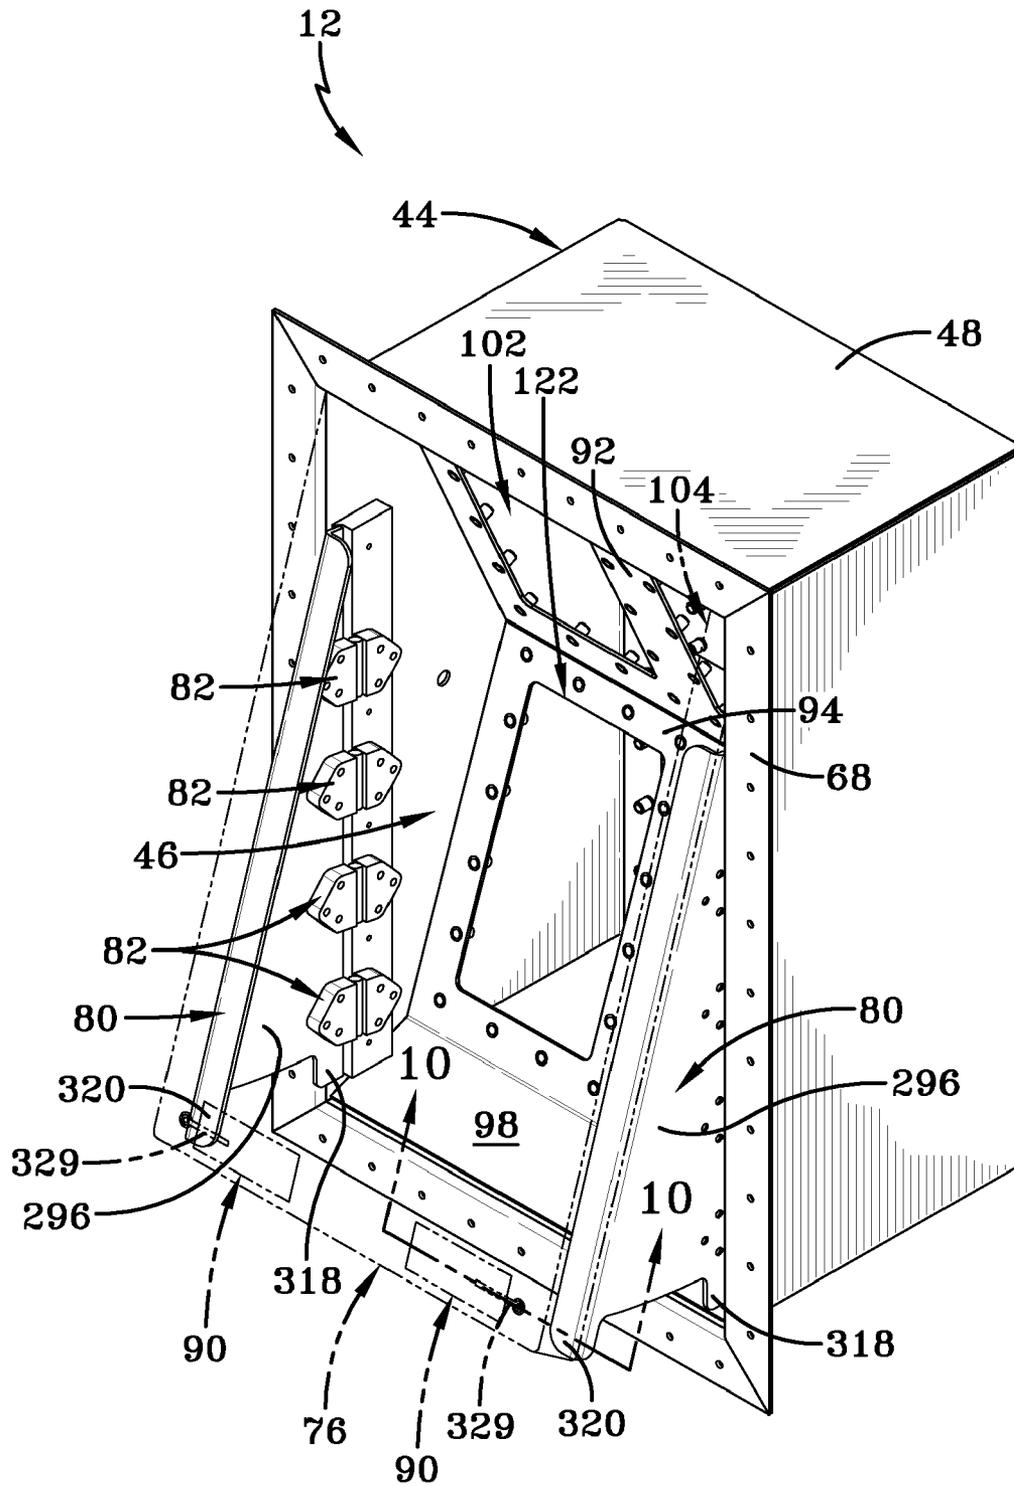


FIG-6

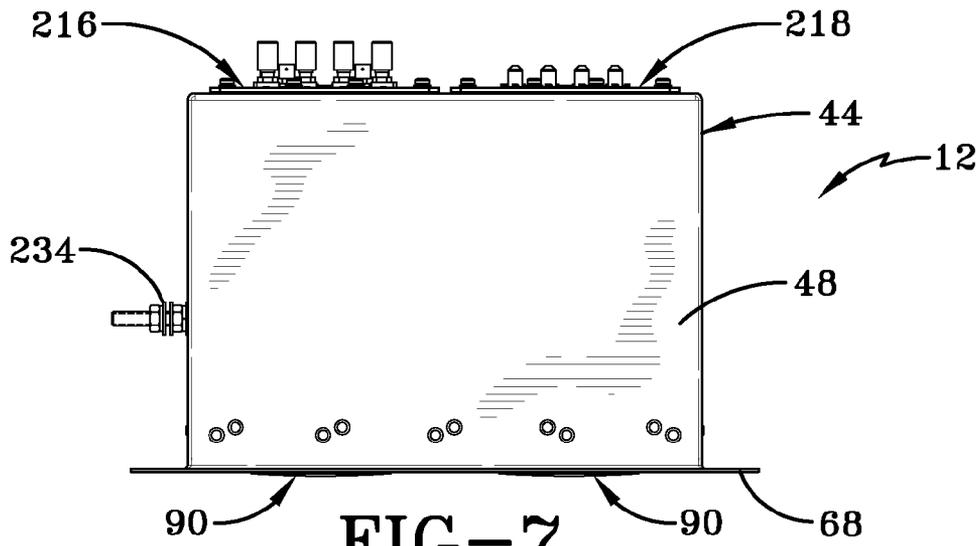


FIG-7

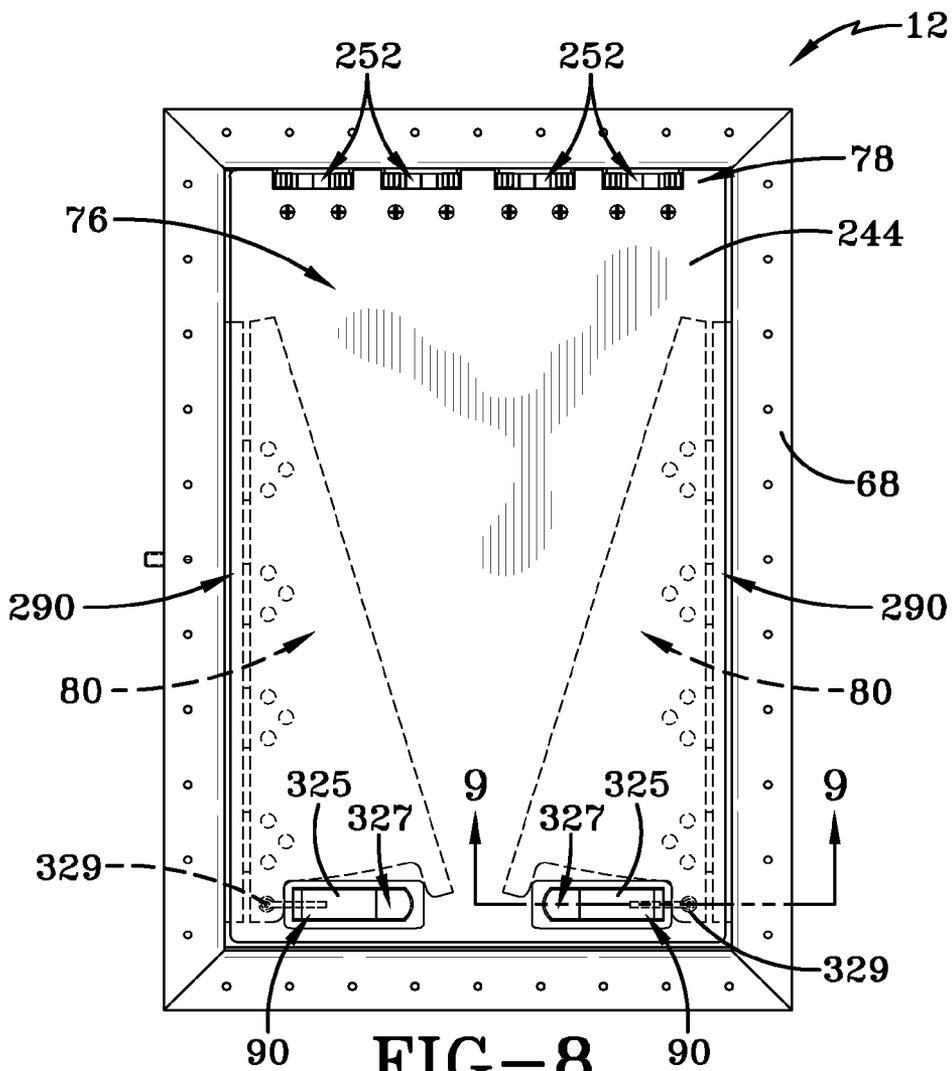


FIG-8

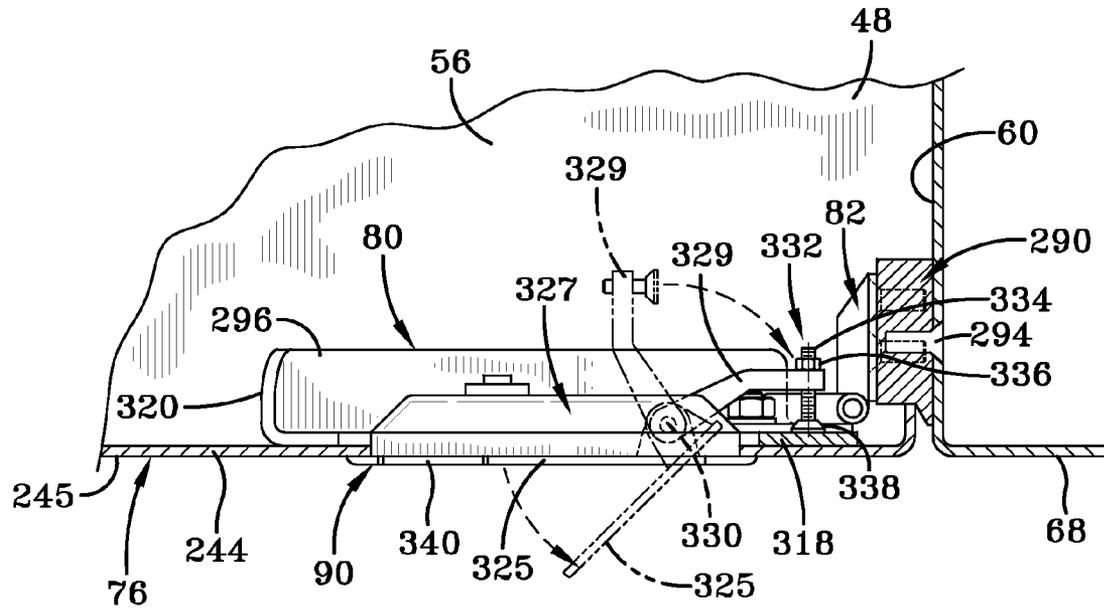


FIG-9

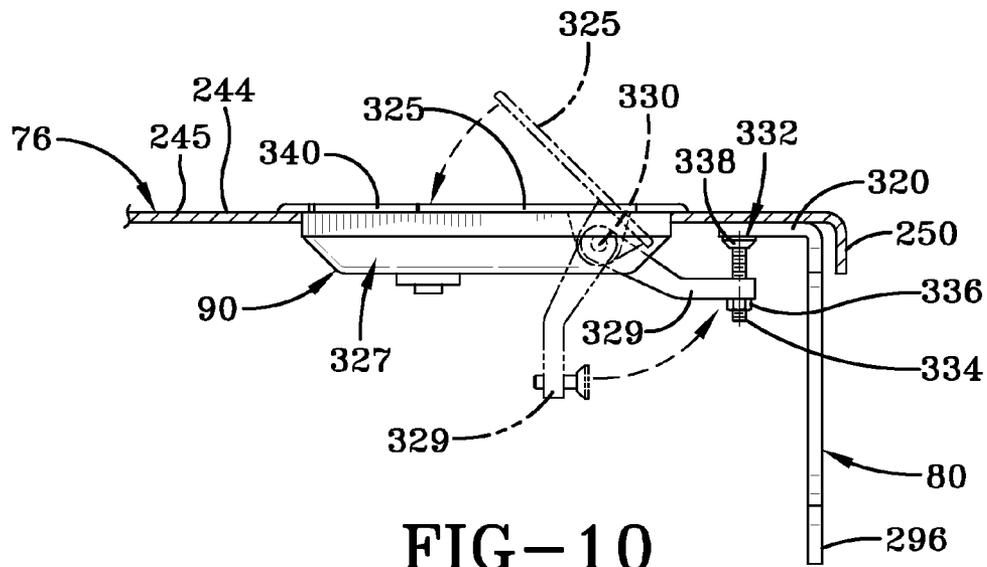


FIG-10

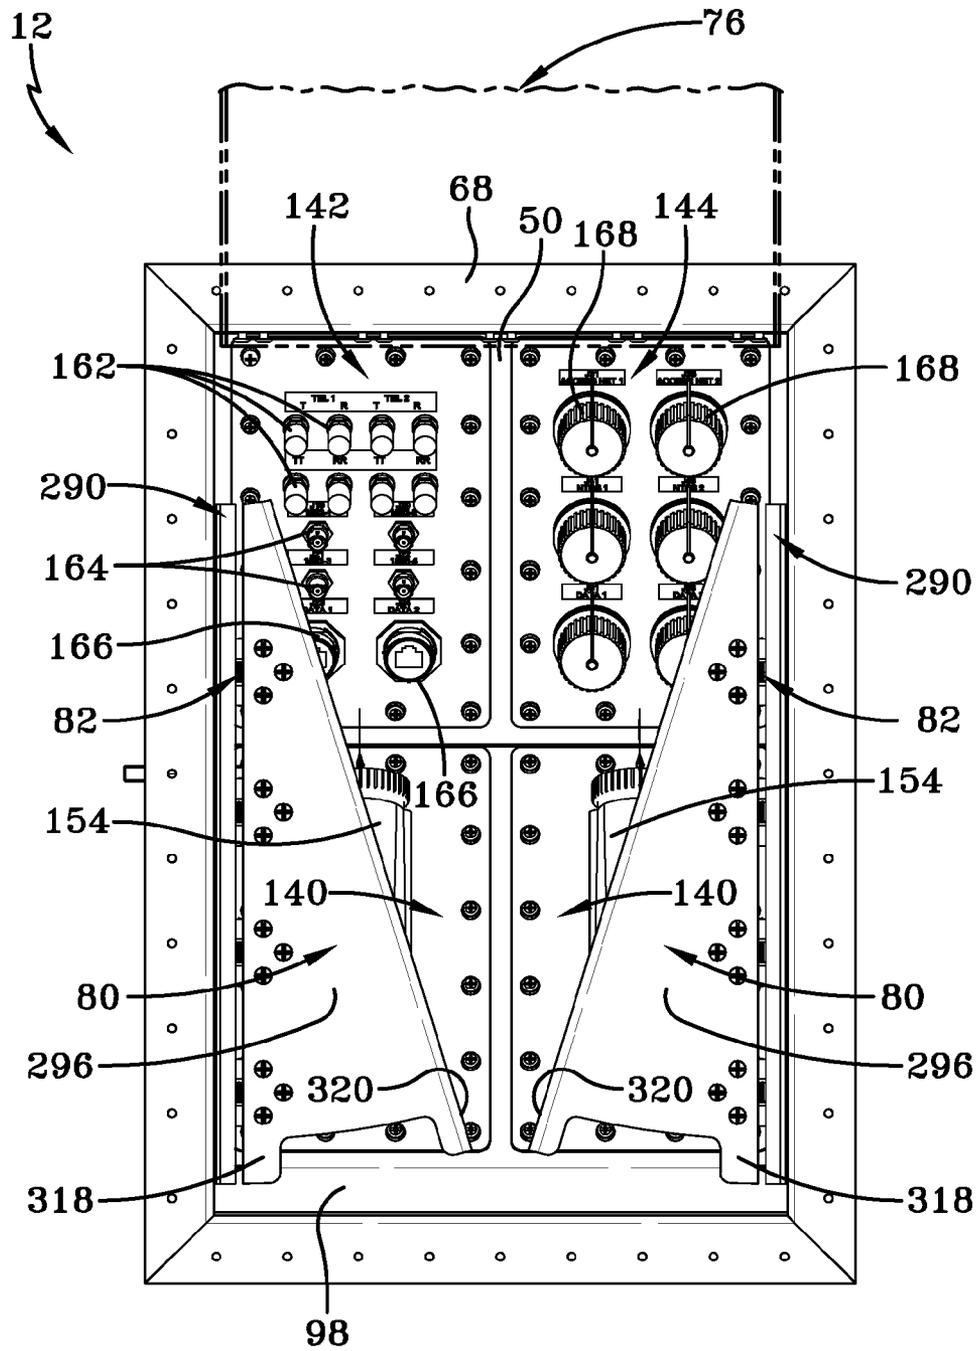


FIG-11

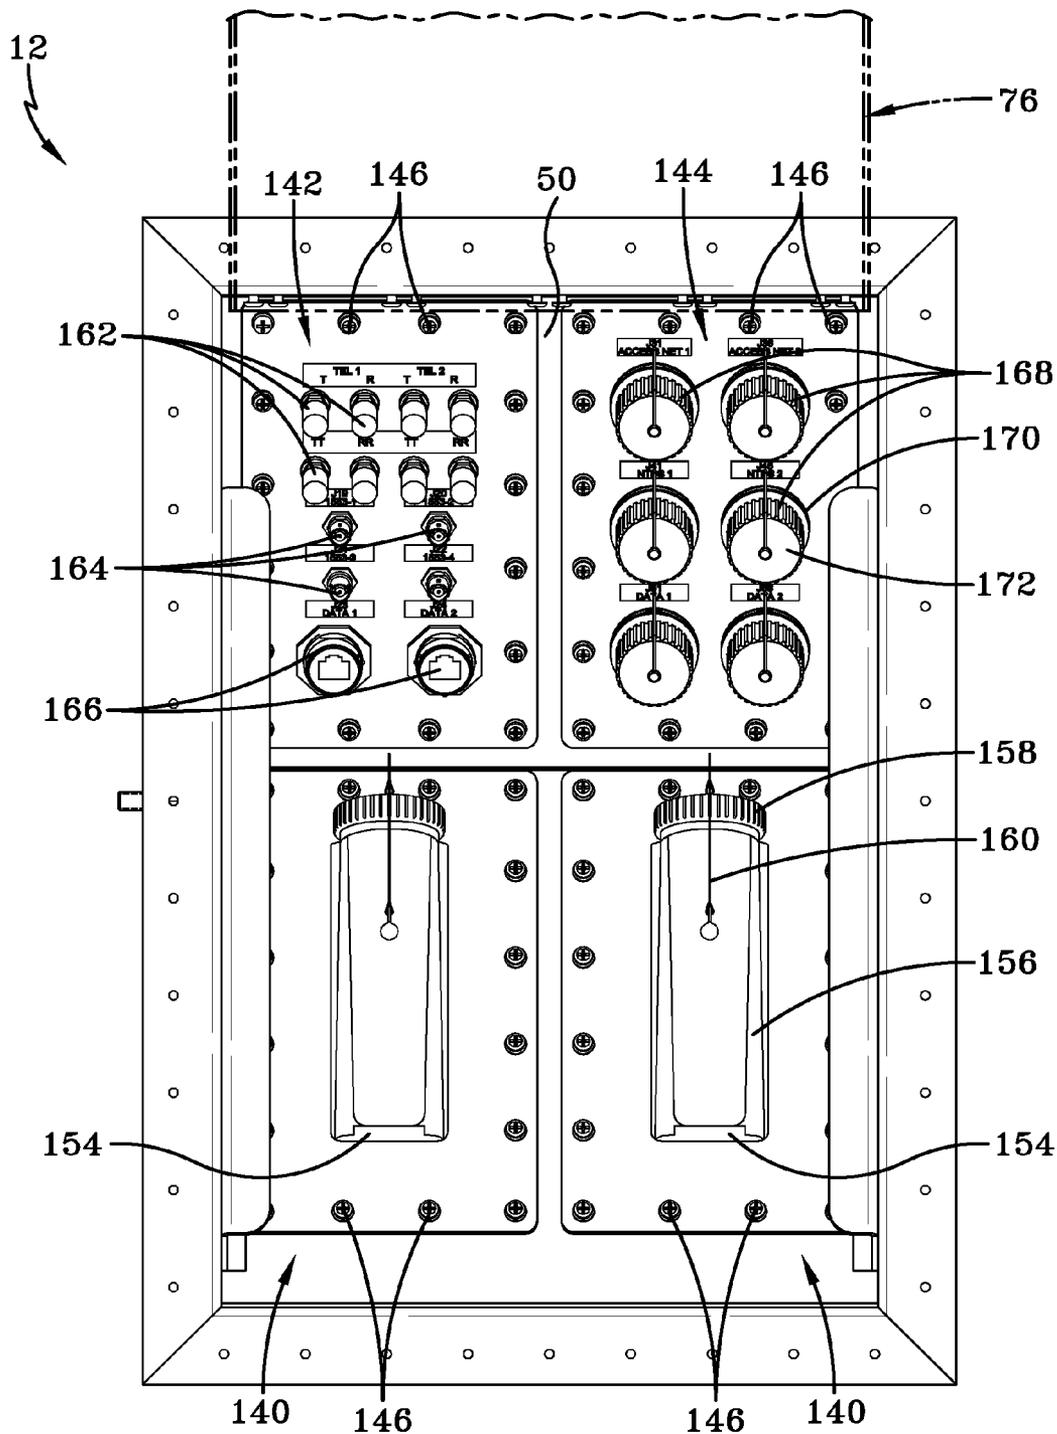


FIG-12

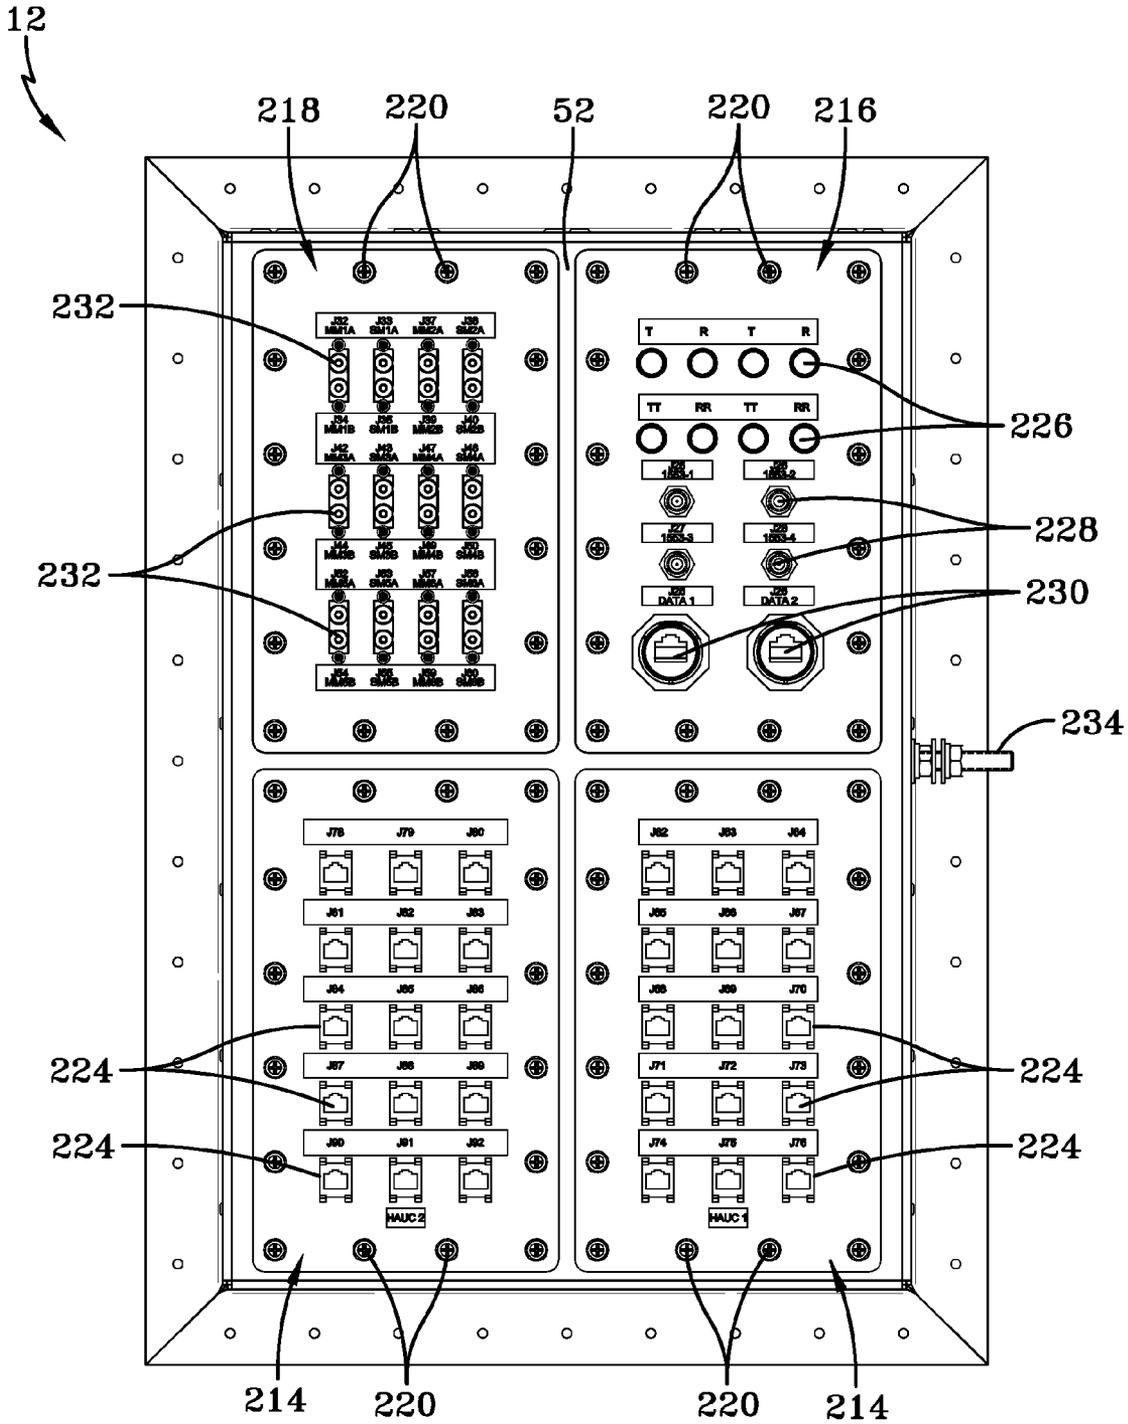


FIG-13

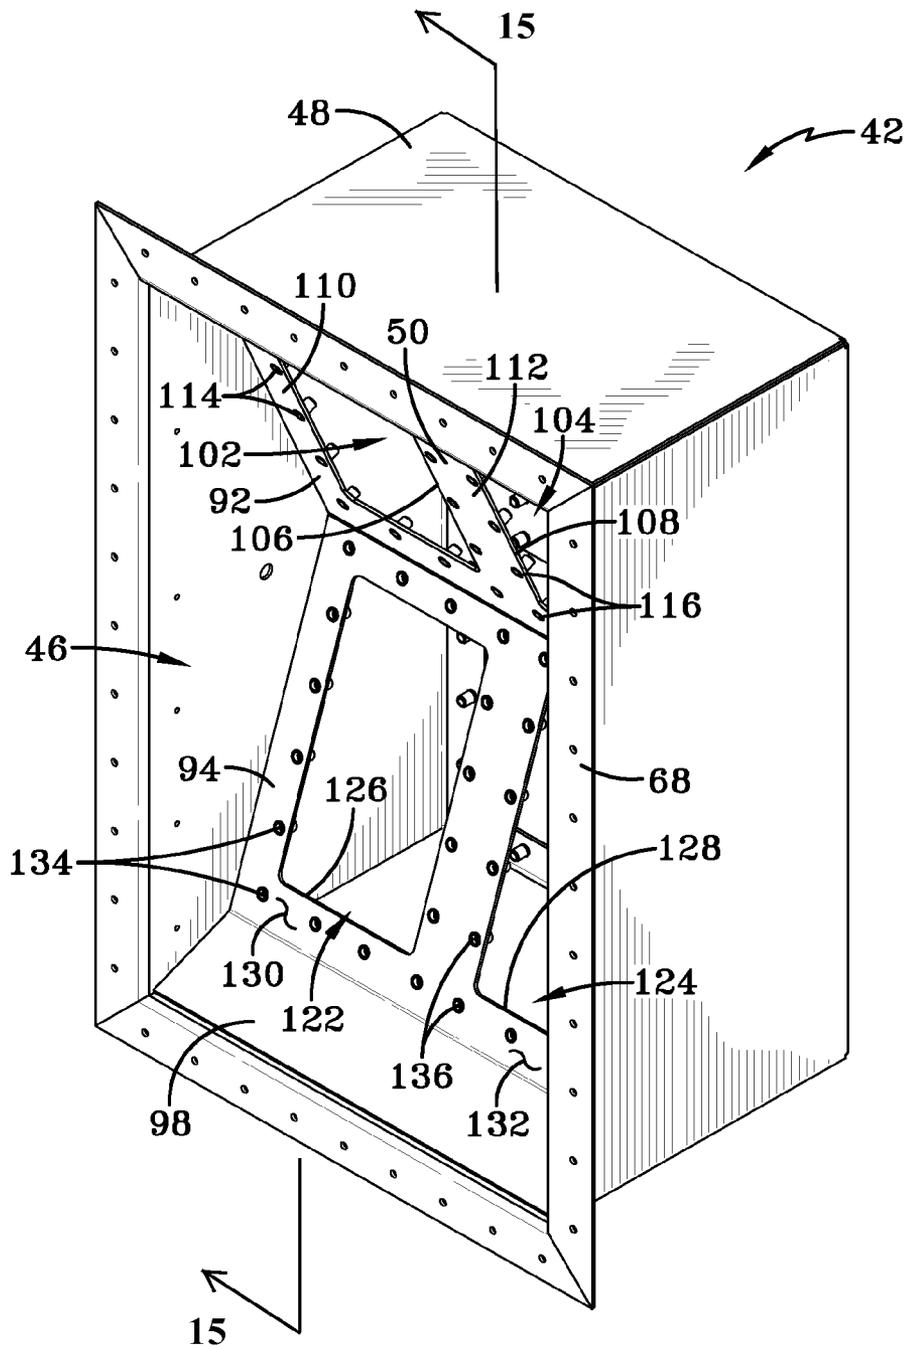


FIG-14

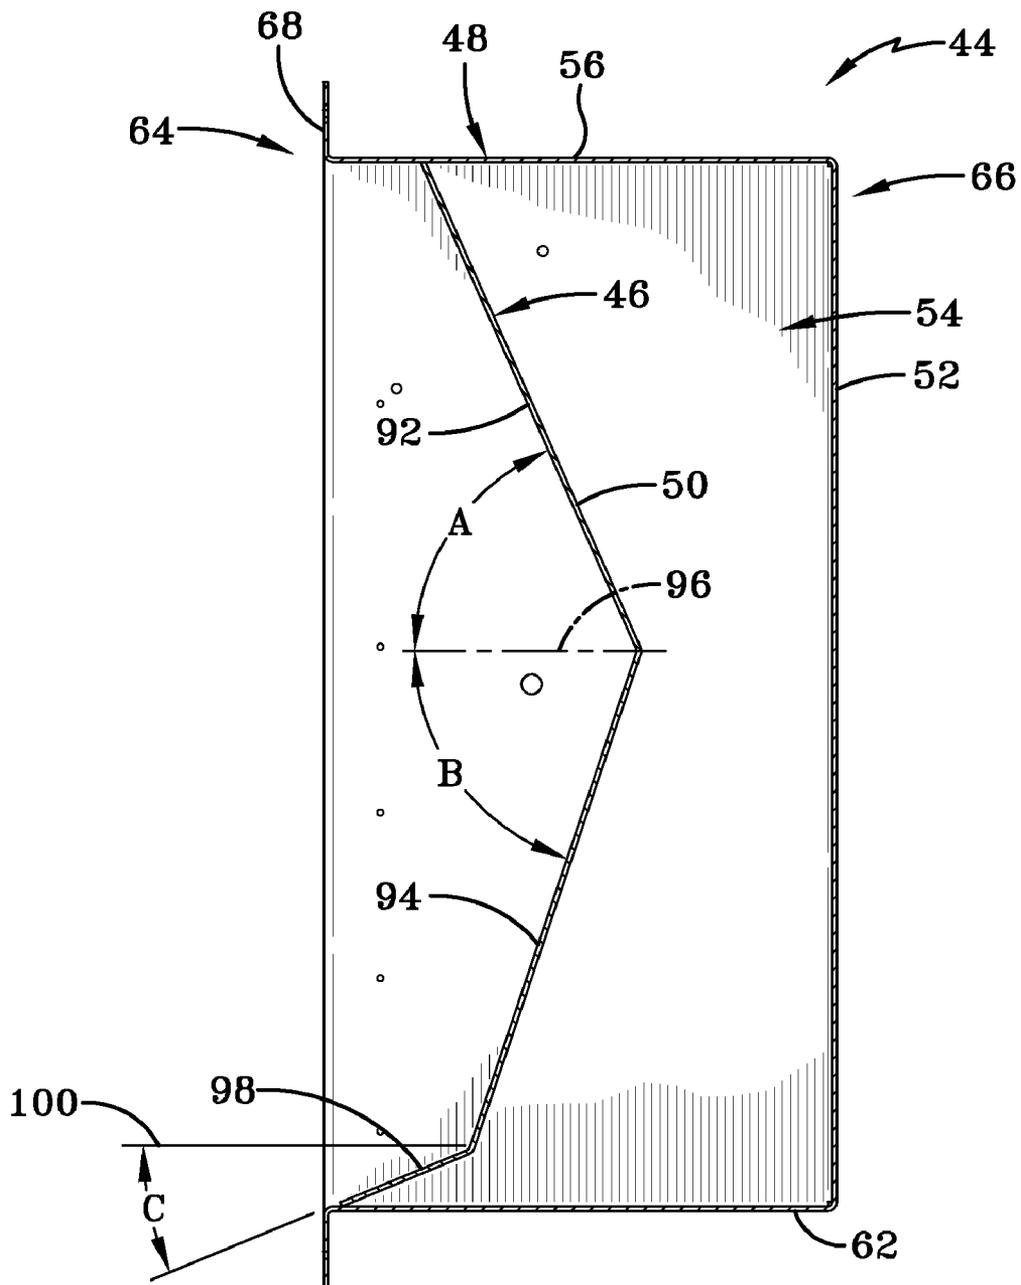


FIG-15

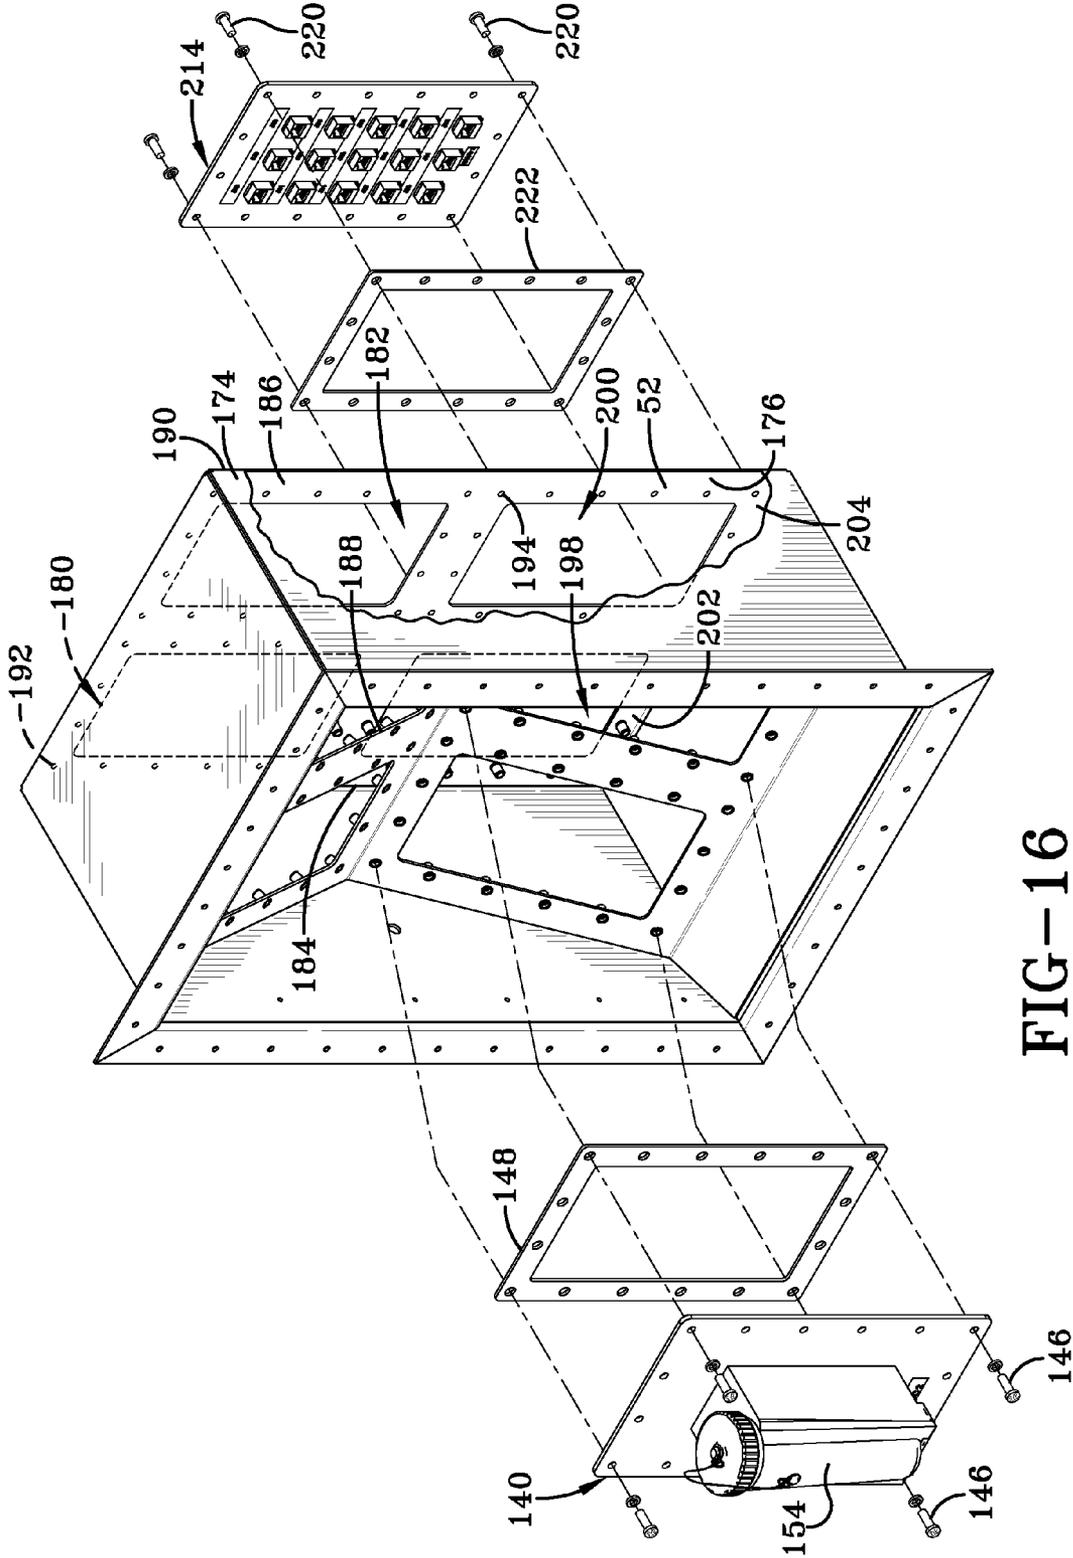
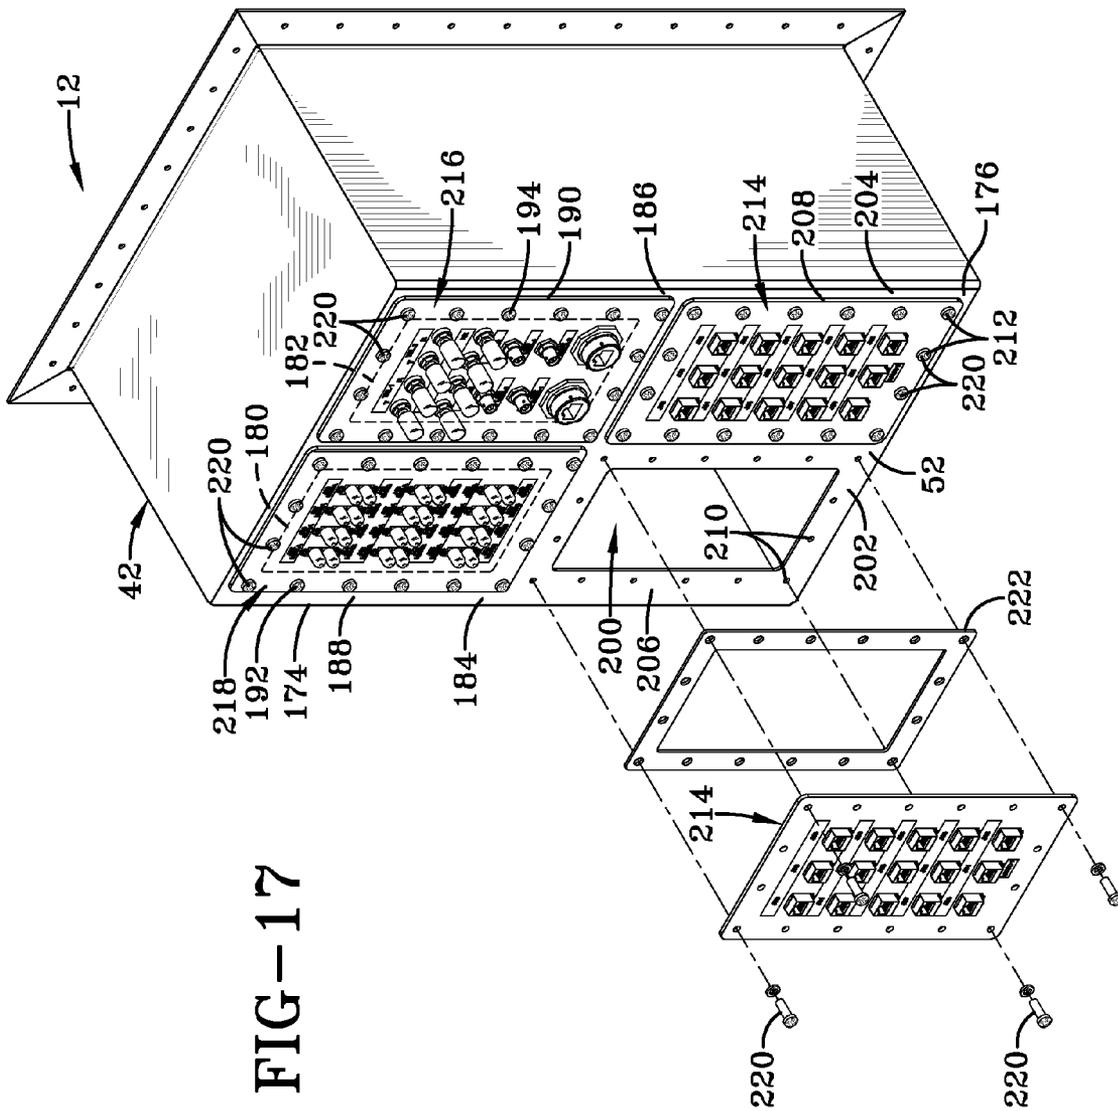


FIG-16



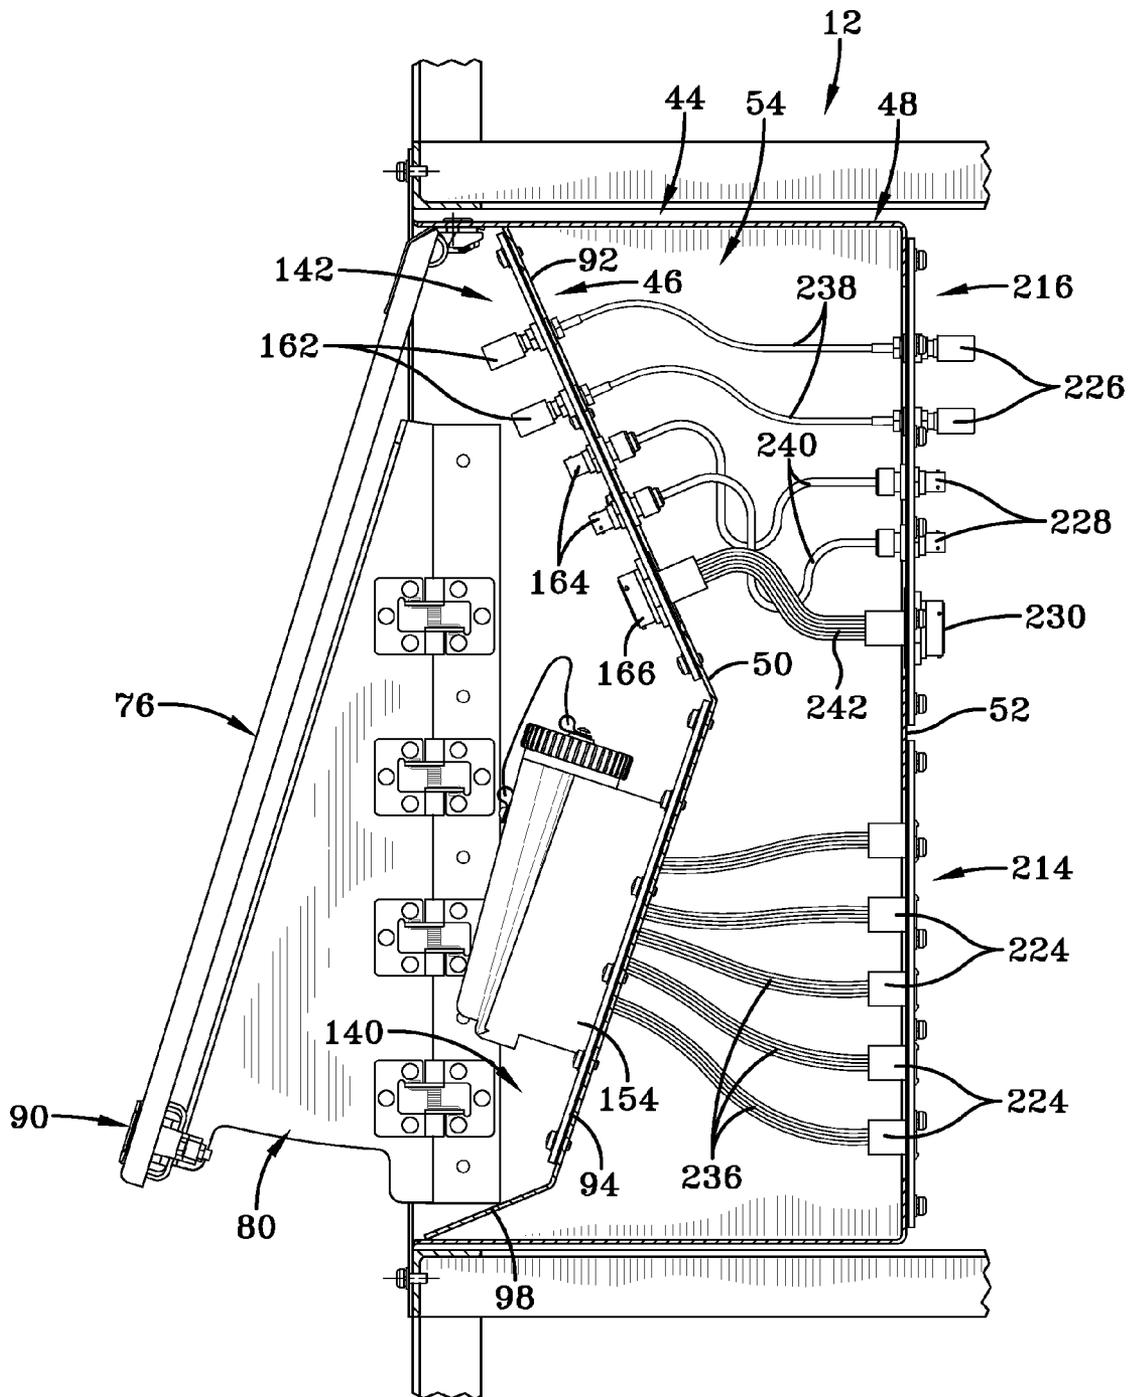


FIG-18

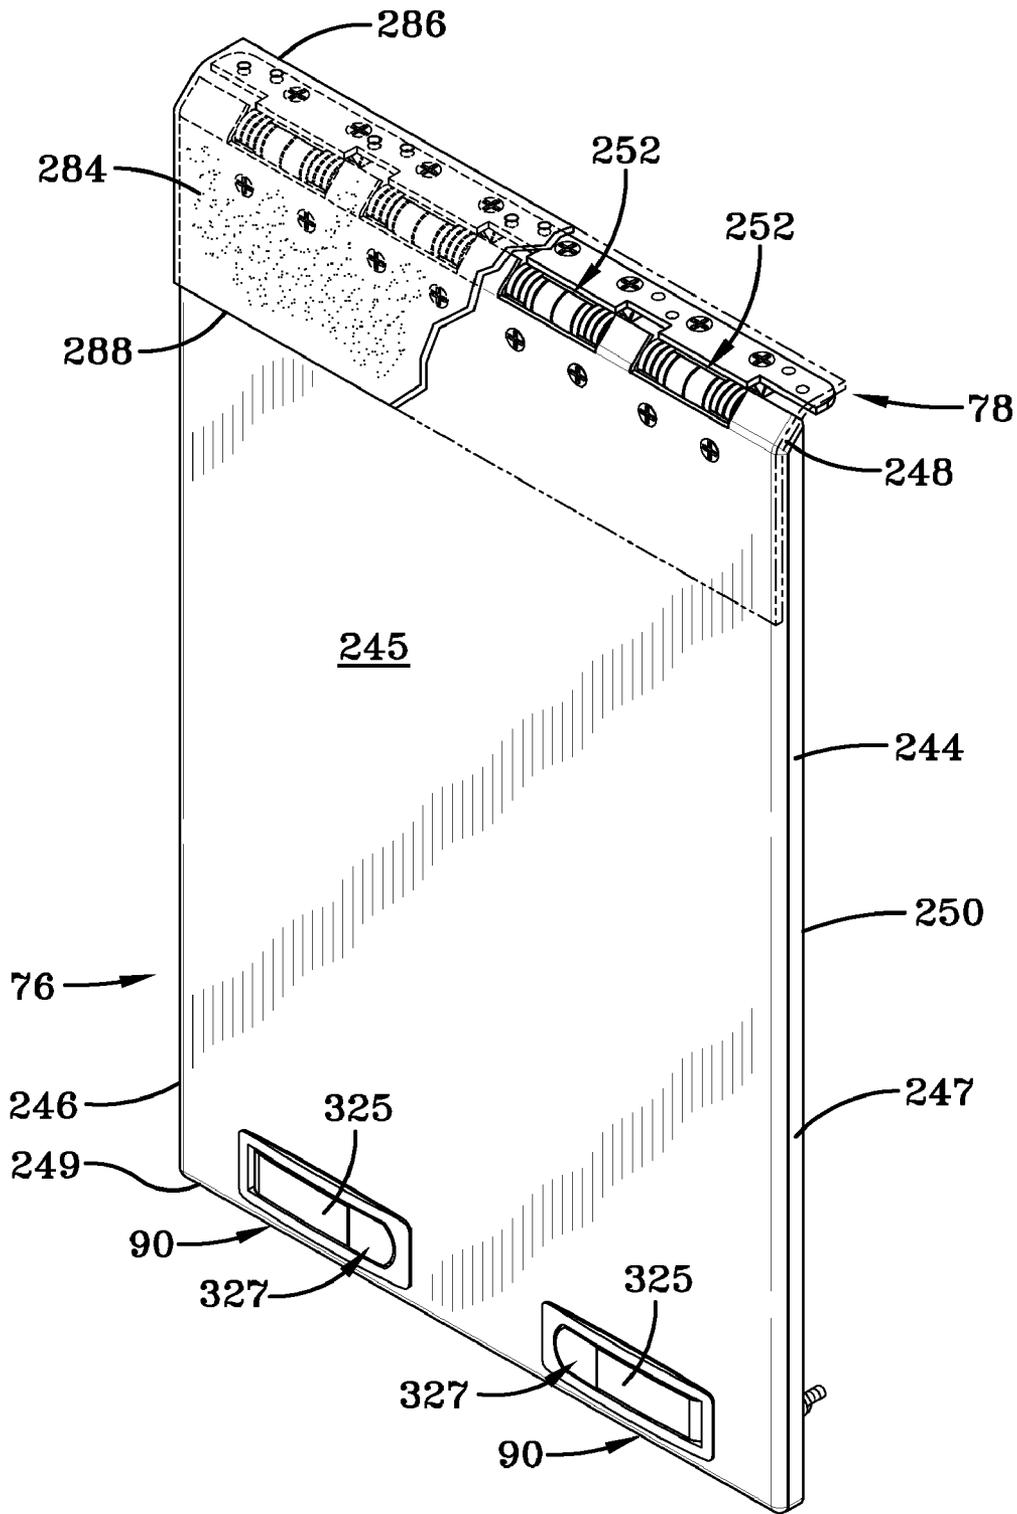
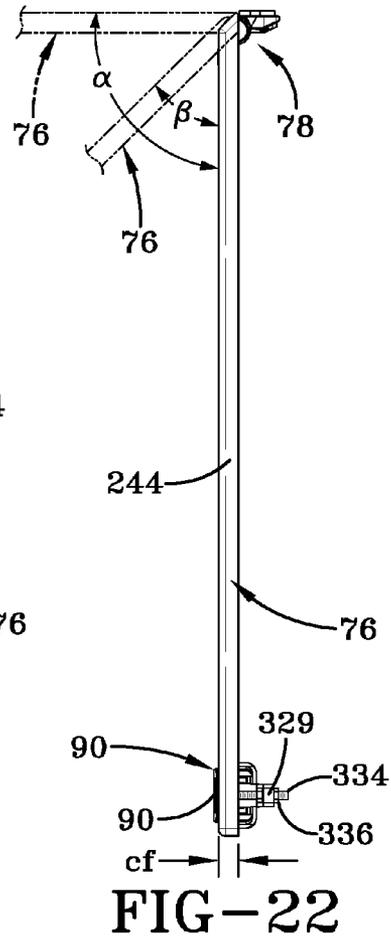
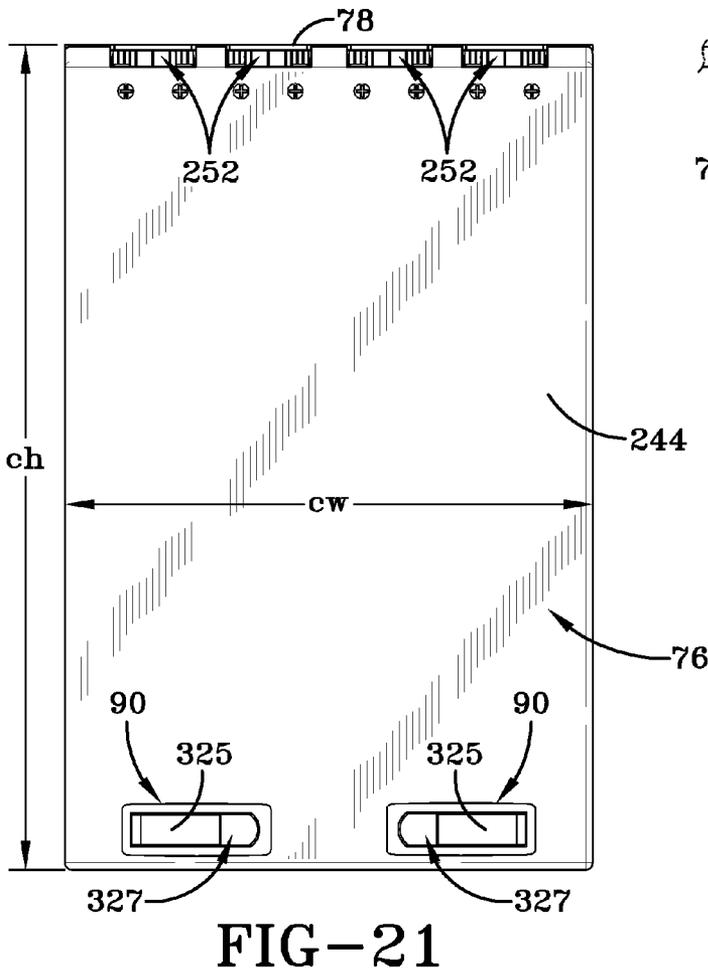
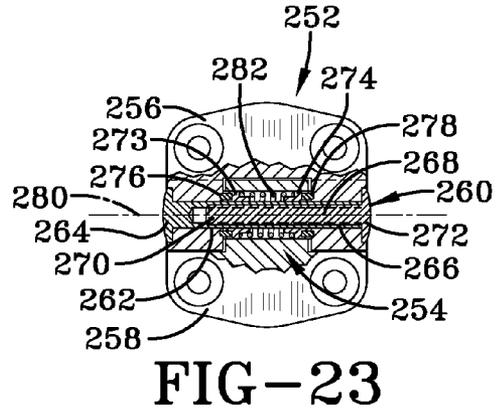
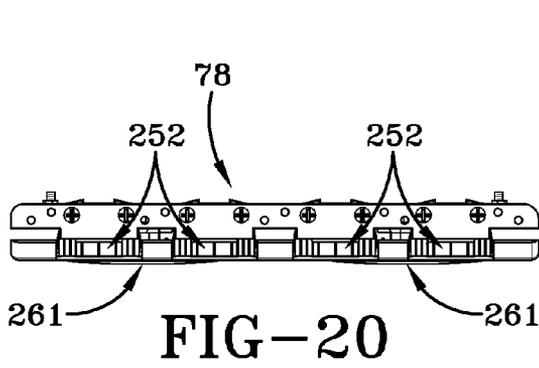
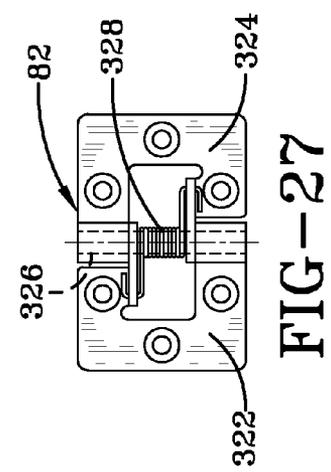
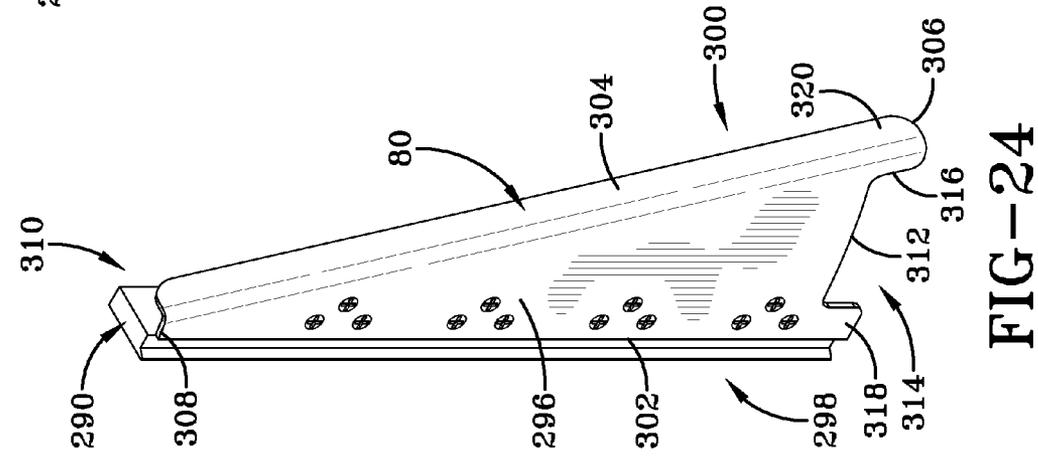
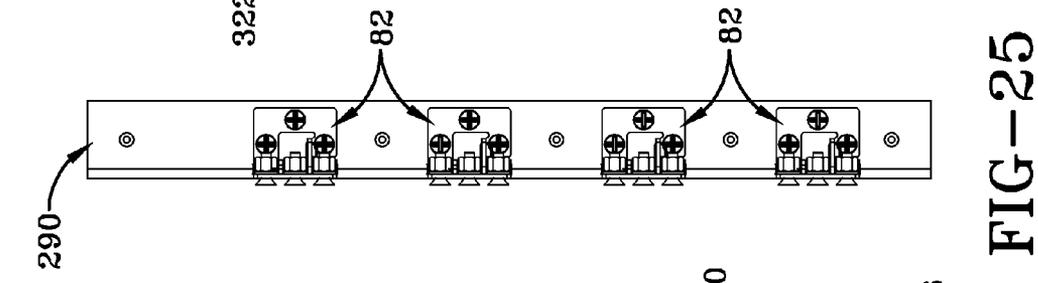
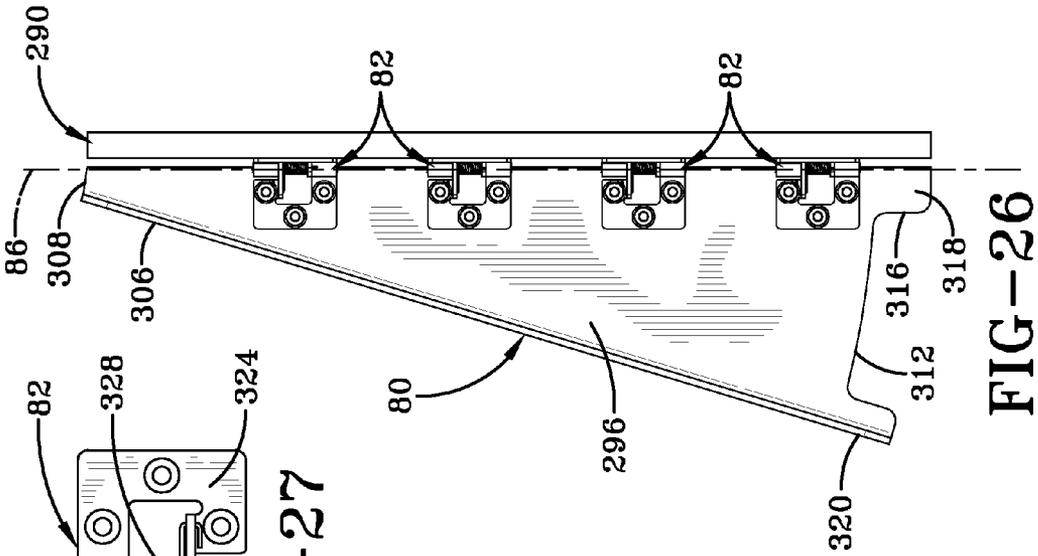


FIG-19





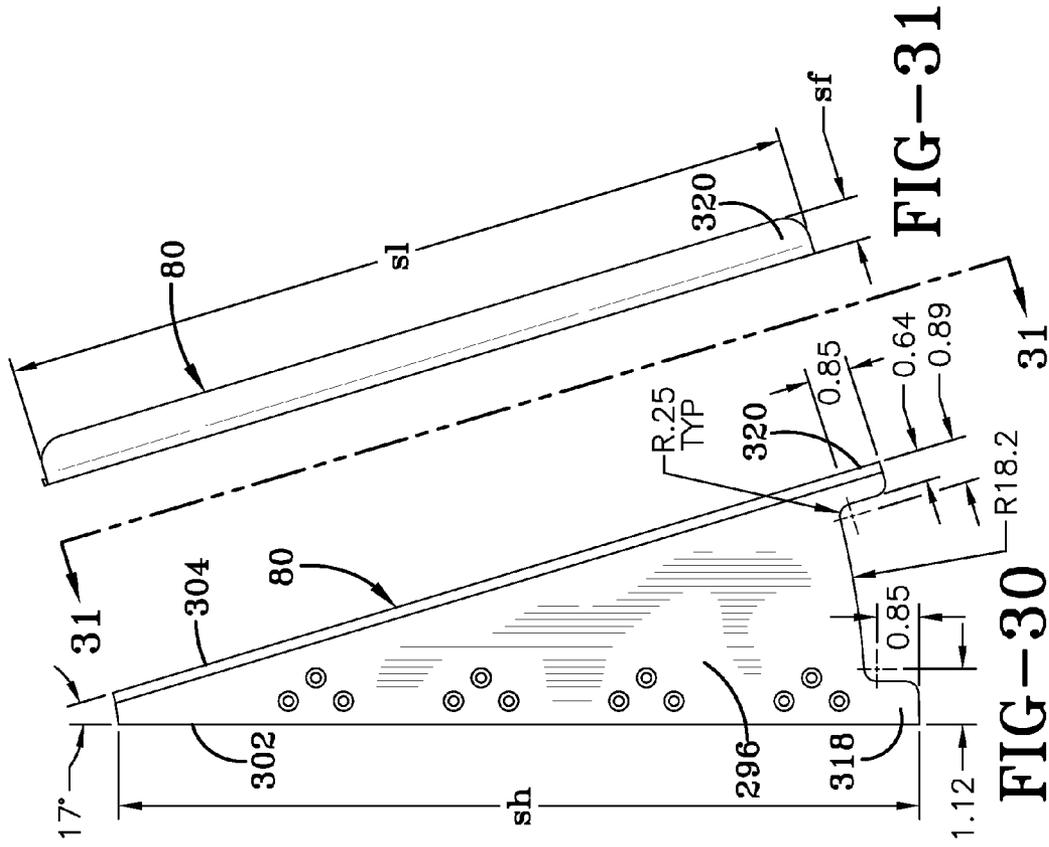


FIG-30

FIG-31

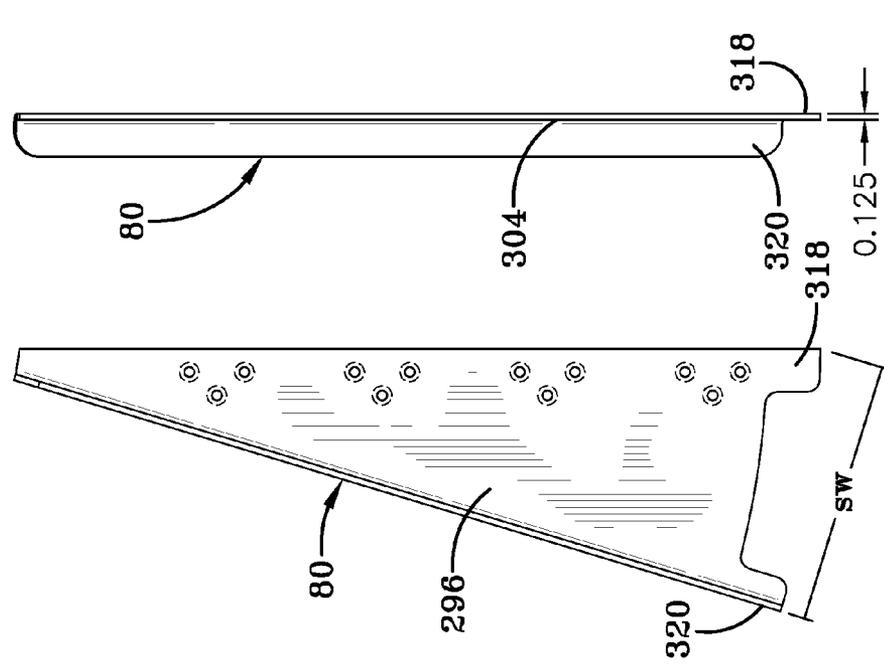


FIG-28

FIG-29



FIG-32

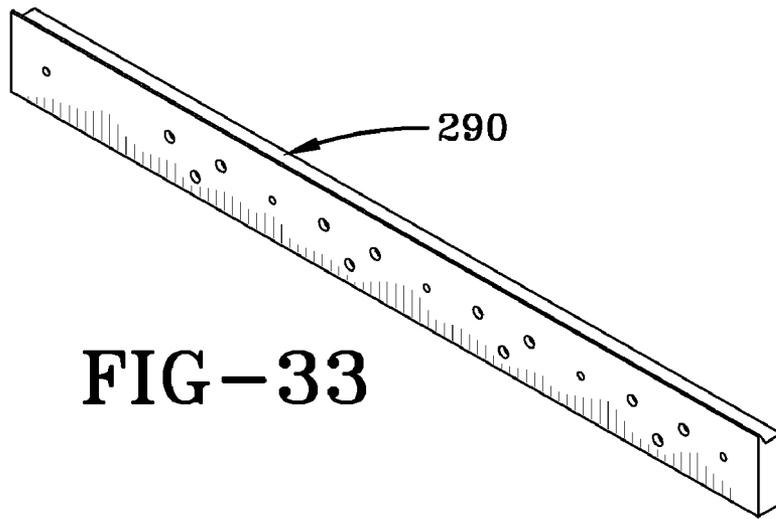


FIG-33

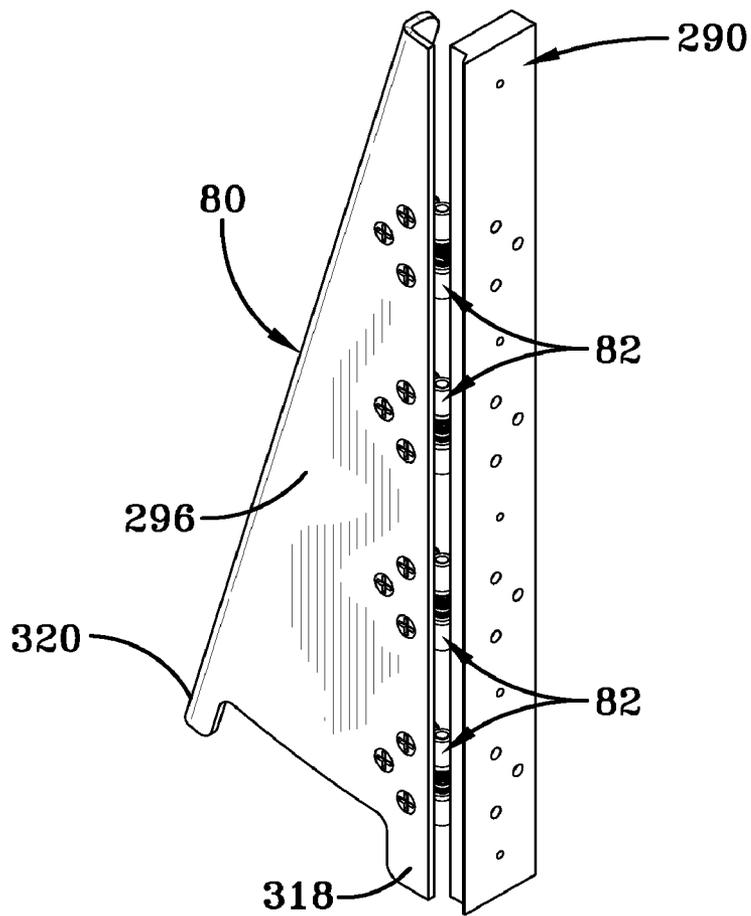


FIG-34

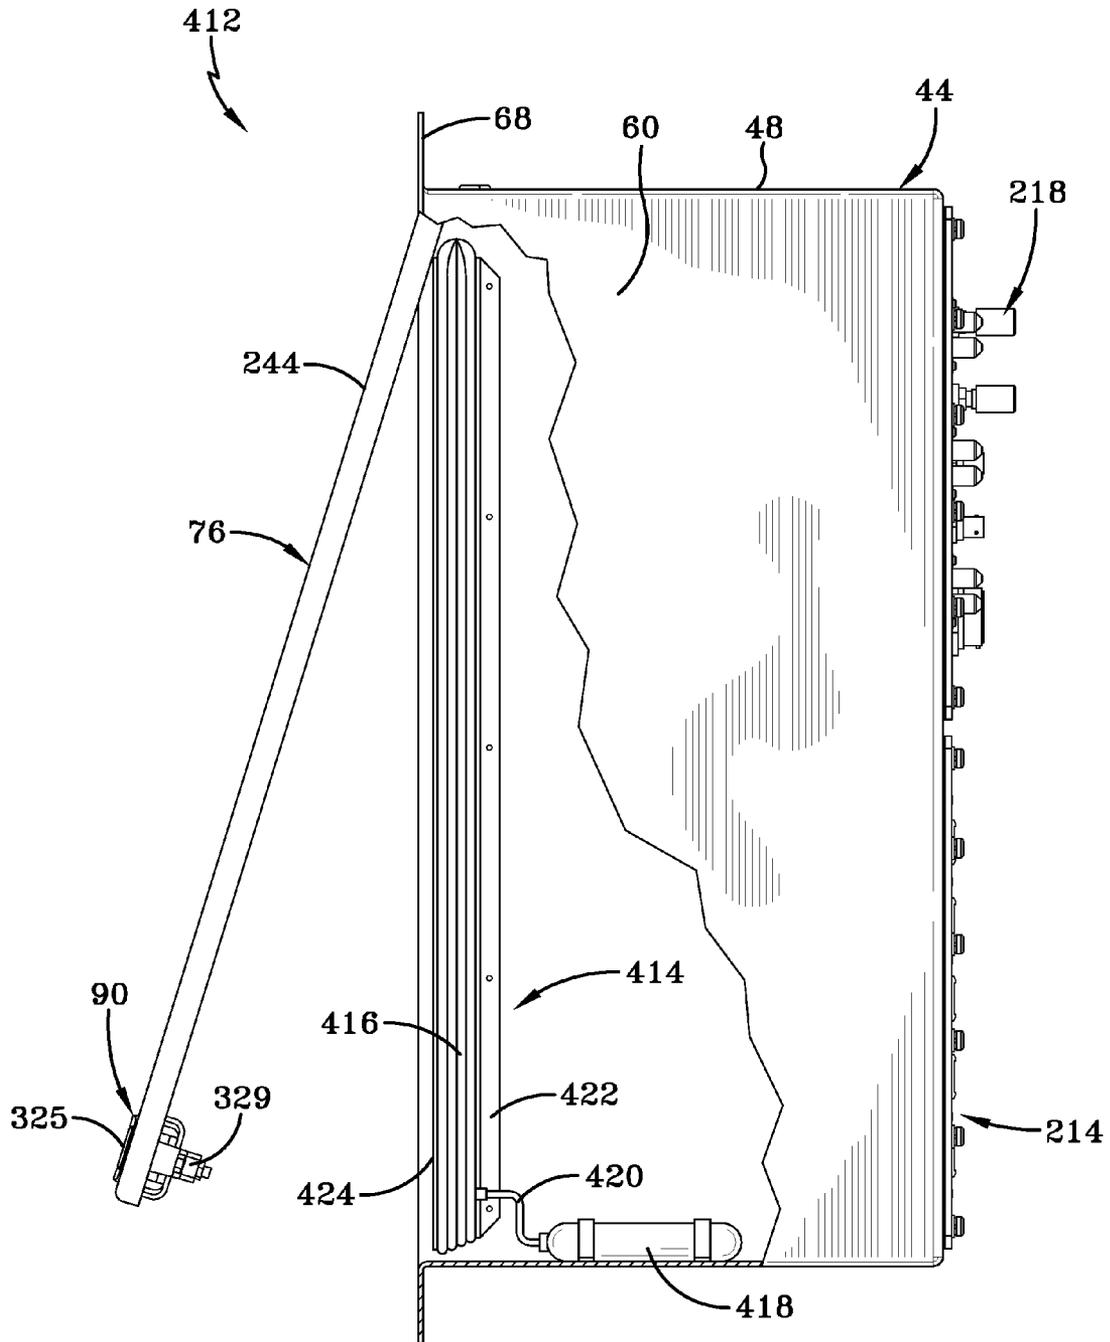


FIG-35

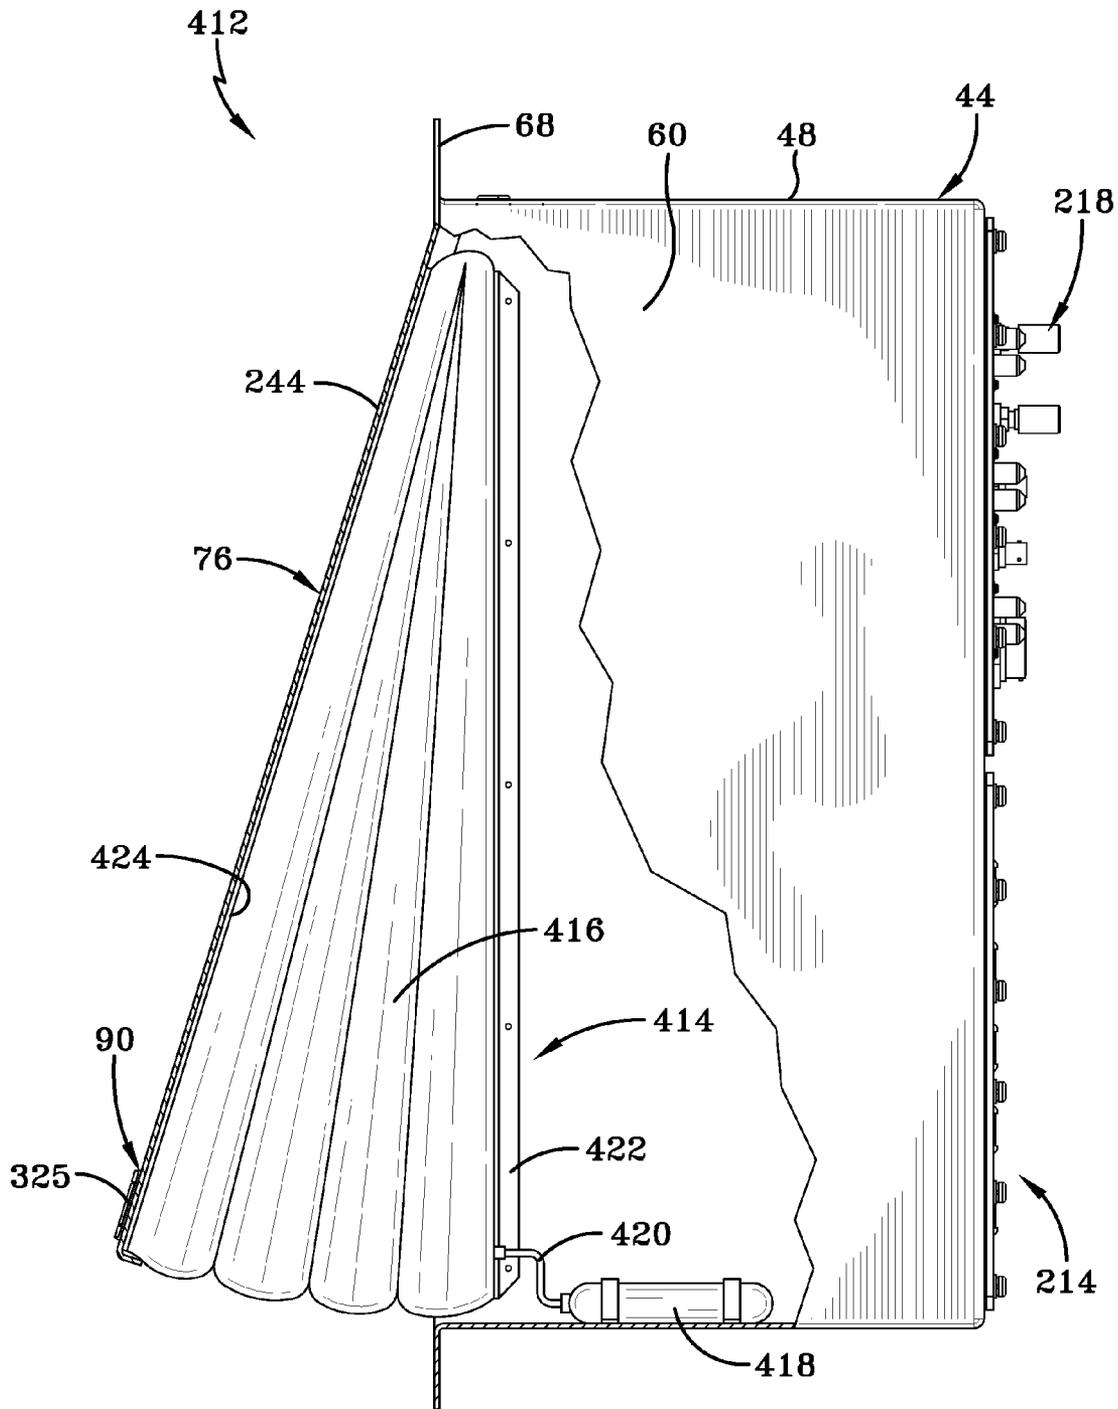


FIG-36

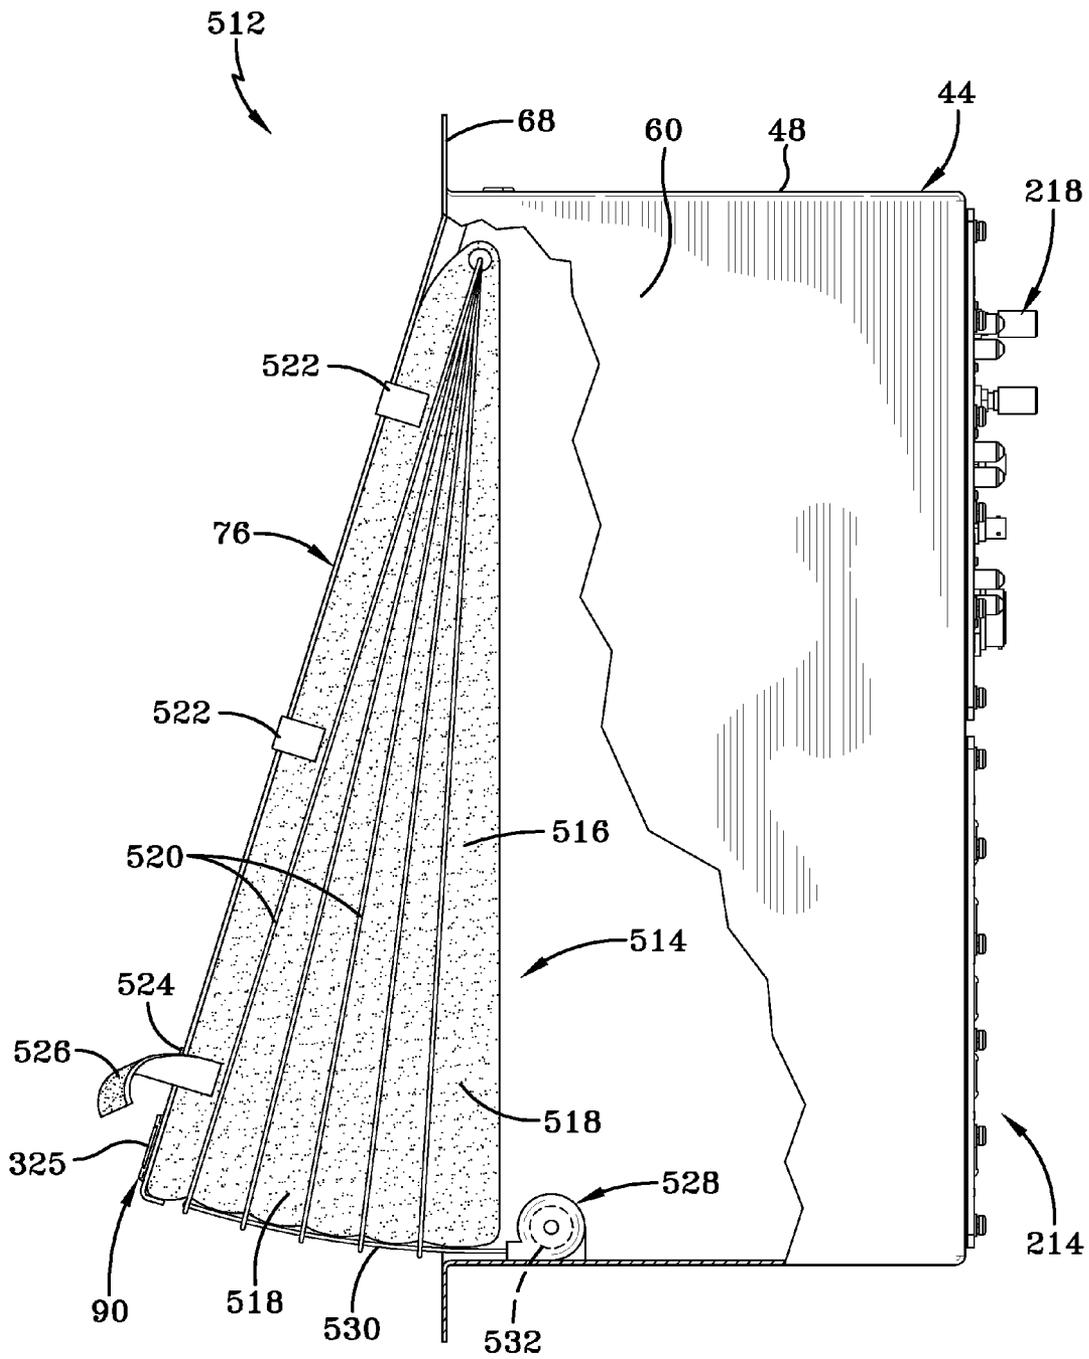


FIG-37

ELECTRICAL INTERFACE ASSEMBLY**CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application claims priority as a continuation-in-part application to U.S. Provisional Patent Application Ser. No. 61/291,694, filed Dec. 31, 2009, entitled "VEHICLE AND MAST MOUNTING ASSEMBLY THEREFOR," the disclosure of which is expressly incorporated by reference herein. The present application is also related to U.S. patent application Ser. No. 12/696,778, filed Jan. 29, 2010, entitled "PROTECTIVE MEMBERS FOR AN ELECTRICAL INTERFACE ASSEMBLY", and U.S. patent application Ser. No. 12/696,861, filed Jan. 29, 2010, entitled "COMMUNICATIONS VEHICLE", the disclosures of which are expressly incorporated by reference herein.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

The invention described herein was made in the performance of official duties by employees of the Department of the Navy and may be manufactured, used and licensed by or for the United States Government for any governmental purpose without payment of any royalties thereon.

BACKGROUND AND SUMMARY OF THE DISCLOSURE

The present invention relates generally to electrical interface assemblies and, more particularly, to interface assemblies including modular panels and configured to be supported within the wall of a mobile structure.

It is known to provide mobile communication structures including a plurality of external electrical interfaces, such as signal entry panels. Such signal entry panels are often uncovered and thereby exposed to environmental elements, such as rain, snow, soil, sand, and debris. Such exposure may interfere with the operation of the signal entry panels by disrupting with electrical connections therewith and causing intermittent failures. Furthermore, it is often desired to quickly modify the number and/or types of electrical connections supported by the signal entry panels, often in remote locations.

According to an illustrative embodiment of the present disclosure, an electrical interface assembly is configured to be supported within a wall of a mobile structure. The electrical interface assembly includes a frame having an outer support and an inner support spaced apart from the outer support. A chamber extends between the outer support and the inner support and is configured to be positioned within the wall of the mobile structure. An exterior panel is supported by the outer support and includes at least one electrical connector. A plurality of couplers removably couple the exterior panel to the outer support. An outer electromagnetic interference gasket is positioned intermediate the exterior panel and the outer support. An interior panel is supported by the inner support and includes at least one electrical connector. A plurality of couplers removably couple the interior panel to the inner support. An inner electromagnetic interference gasket is positioned intermediate the interior panel and the inner support. A cable is electrically coupled intermediate the at least one electrical connector of the exterior panel and the at least one electrical connector of the interior panel.

According to another illustrative embodiment of the present disclosure, a method of installing a signal entry panel

includes the steps of providing a support having an outer support and an inner support spaced apart from the outer support. The method further includes the steps of positioning an electromagnetic interference gasket adjacent the outer support, and positioning an outer signal entry panel adjacent the outer support with the electromagnetic interference gasket intermediate the signal entry panel and the outer support, the outer signal entry panel including at least one electrical connector. The method further includes the steps of securing a plurality of couplers to the signal entry panel for releasably coupling the signal entry panel to the outer support, positioning an inner signal entry panel adjacent the inner support, the inner signal entry panel including at least one electrical connector, and electrically coupling the outer signal entry panel with the inner signal entry panel.

Additional features and advantages of the present invention will become apparent to those skilled in the art upon consideration of the following detailed description of the illustrative embodiment exemplifying the best mode of carrying out the invention as presently perceived.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same become better understood by reference to the following detailed description when taken in conjunction with the accompanying drawings.

FIG. 1 is a side view of a vehicle including an illustrative electrical interface assembly of the present disclosure;

FIG. 2 is a perspective view of the shelter assembly carried by the vehicle of FIG. 1;

FIG. 3 is a perspective view of the illustrative electrical interface assembly shown in FIG. 1;

FIG. 4 is a view similar to FIG. 3 of the electrical interface assembly, with the cover shown in phantom in a fully raised position, the side wings shown in a stowed position, and the interface panels removed for clarity;

FIG. 5 is a view similar to FIG. 4, showing the side wings shown in a deployed position;

FIG. 6 is a view similar to FIG. 5, with the cover shown in phantom in a deployed position;

FIG. 7 is a top plan view of the electrical interface assembly of FIG. 3;

FIG. 8 is a front view of the electrical interface assembly of FIG. 7;

FIG. 9 is a cross-sectional view taken along line 9-9 of FIG. 8;

FIG. 10 is a cross-sectional view taken along line 10-10 of FIG. 8;

FIG. 11 is a front plan view similar to FIG. 8, showing the side wings in a stowed position and the cover in phantom in a fully raised position;

FIG. 12 is a front plan view similar to FIG. 11, showing the side wings in a deployed position;

FIG. 13 is a rear view of the electrical interface assembly of FIG. 7;

FIG. 14 is a perspective view similar to FIG. 4, with the cover and side wings removed for clarity;

FIG. 15 is a cross-sectional view taken along line 15-15 of FIG. 14;

FIG. 16 is a front exploded perspective view, with a partial cut-away, showing illustrative mounting arrangements for an external electrical interface panel and an internal electrical interface panel;

FIG. 17 is a rear exploded perspective view showing an illustrative mounting arrangement for internal electrical interface panels;

FIG. 18 is a cross-sectional view similar to FIG. 15, showing the interconnections between external electrical interface panels and internal electrical interface panels;

FIG. 19 is a perspective view of the cover of the electrical interface assembly of FIG. 3;

FIG. 20 is a top plan view of the cover of FIG. 19;

FIG. 21 is a front view of the cover of FIG. 19;

FIG. 22 is a side elevational view of the cover of FIG. 19, showing fully raised and deployed positions in phantom;

FIG. 23 is a detail view, with a partial cut-away, of a side wing hinge;

FIG. 24 is a perspective view of a side wing of the electrical interface assembly of FIG. 3;

FIG. 25 is an end view of the side wing of FIG. 24;

FIG. 26 is a side elevational view of the side wing of FIG. 24;

FIG. 27 is a detail view of a side wing hinge of FIG. 24;

FIG. 28 is a first side elevational view of a side wing body of FIG. 24;

FIG. 29 is a first end view of the side wing body of FIG. 28;

FIG. 30 is a second side elevational view of the side wing body of FIG. 28;

FIG. 31 is a second end view of the side wing body of FIG. 28, taken along line 31-31 of FIG. 30;

FIG. 32 is a bottom plan view of the side wing body of FIG. 30;

FIG. 33 is a perspective view of a side wing stand-off of FIG. 24;

FIG. 34 is a perspective view of a further side wing of the electrical interface assembly of FIG. 3;

FIG. 35 is a side elevational view, with a partial cut-away, of a further illustrative embodiment electrical interface assembly of the present disclosure;

FIG. 36 is a view similar to FIG. 35, showing the cover in a deployed position; and

FIG. 37 is a side elevational view, with a partial cut-away thereof, of a further illustrative electrical interface assembly of the present disclosure.

Corresponding reference characters indicate corresponding parts throughout the several views. Although the drawings represent embodiments of various features and components according to the present disclosure, the drawings are not necessarily to scale and certain features may be exaggerated in order to better illustrate and explain the present disclosure. The exemplification set out herein illustrates embodiments of the invention, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

DETAILED DESCRIPTION OF THE DRAWINGS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings, which are described below. The embodiments disclosed below are not intended to be exhaustive or limit the invention to the precise form disclosed in the following detailed description. Rather, the embodiments are chosen and described so that others skilled in the art may utilize their teachings. It will be understood that no limitation of the scope of the invention is thereby intended. The invention includes any alterations and further modifications in the illustrated devices and described methods and further applications of the principles of the invention which would normally occur to one skilled in the art to which the invention relates.

Referring initially to FIGS. 1 and 2, a mobile structure, illustratively a vehicle 10, is shown as including a plurality of electrical interface assemblies 11. The vehicle 10 illustratively includes a plurality of ground engaging members 14 which support a frame 16. While the ground engaging members 14 are shown as comprising tires and wheels, other ground engaging members such as tracks or sleds may be employed. The invention is equally applicable to a wide variety of mobile structures (e.g., water floatation devices) as well as fixed structures (e.g., buildings).

In the illustrative embodiment, a shelter assembly 18 is supported by the frame 16 and includes a pivotally mounted mast assembly 20. The mast assembly 20 may support various antennae for transmitting and receiving radio frequency signals. Additional details of the mast assembly 20 are provided in U.S. Provisional Patent Application Ser. No. 61/291,694, filed Dec. 31, 2009, entitled "VEHICLE AND MAST MOUNTING ASSEMBLY THEREFOR," the disclosure of which has been expressly incorporated by reference herein.

Referring further to FIG. 2, the shelter assembly 18 illustratively includes an enclosure 22 having a top wall 24, a front wall 26, side walls 28 and 30, and a rear wall 32. Shelter assembly 18 may also include a work platform 34 including a hoist 36, as well as a plurality of antenna 38 positioned around the enclosure 22. A plurality of electrical interface assemblies 11 may be supported within one or more of the walls 26, 28, 30, and 32 of the enclosure 22.

With reference to FIGS. 3-8, an illustrative electrical interface assembly 11, such as a signal interface assembly 12, is shown removed from the enclosure 22. The signal interface assembly 12 is illustratively configured to provide for simple and efficient electrical communication between an exterior 40 of the enclosure 22 and an interior 42 of the enclosure 22 (FIG. 3). More particularly, the signal interface assembly 12 permits electrical communication between equipment external to the enclosure 22 and equipment received within the enclosure 22. Such electrical communication may be user defined, and illustratively may include telecommunication signals (e.g. radio frequency signals and data transmissions), electrical power transmissions, etc. As indicated above, the signal interface assembly 12 may be positioned within a vertical support structure, such as vertical wall 26, 28, 30, 32 of the enclosure 22 (FIG. 2).

The signal interface assembly 12 illustratively includes a support 44 having a frame 46 coupled to a housing 48. The frame 46 is illustratively formed of a durable material, such as aluminum, and includes an outer support, such as outer frame or mounting bracket 50, spaced apart from an inner support, such as inner frame or mounting bracket 52. A chamber 54 is defined between the outer frame 50 and the inner frame 52 (FIGS. 4, 5, and 18). The housing 48 is illustratively coupled to the frame 46, for example, by welding, and includes a top wall 56, side walls 58 and 60, and a bottom wall 62. As with the frame 46, the housing 48 is illustratively formed of a durable material, such as aluminum. In certain illustrative embodiments, one or both of outer frame 50 and the inner frame 52 may be formed integral with the housing 48.

The housing 48 illustratively includes an outer end 64 and an inner end 66, wherein the chamber 54 is positioned intermediate the ends 64 and 66 (FIGS. 3 and 4). A mounting flange 68 is coupled to the outer end 64 of the housing 48 and includes a plurality of mounting apertures 70. Fasteners, such as rivets 72 (FIG. 1) may extend through the apertures 70 for securing the signal interface assembly 12 to the enclosure 22.

A first movable member, illustratively a cover 76, is pivotally coupled to the support 44 through a first hinge 78. A pair of second movable members, illustratively side wings 80, are

pivotably coupled to the support **44** through a plurality of second hinges **82**. The first hinge **78** permits pivoting movement of the cover **76** about a horizontal axis **84** (FIG. 3), while the second hinges **82** permit pivoting movement of the side wings **80** about respective vertical axes **86** (FIG. 4). As further detailed herein, the cover **76** pivots upwardly from a stowed position to a raised position (including a deployed position), and the side wings **80** pivot outwardly from stowed positions to deployed positions. A pair of latching mechanisms **90** are illustratively coupled to the cover **76** and are configured to secure together the cover **76** and respective side wings **80** when positioned in the stowed and deployed configurations.

With reference to FIGS. 6, 14, and 15, the outer frame **50** includes an upper frame member **92** coupled to a lower frame member **94**. Both the upper frame member **92** and the lower frame member **94** are angled relative to each other and to a horizontal axis **96**. As shown in the illustrative embodiment of FIG. 15, the upper frame member **92** is angled upwardly from the horizontal axis **96** by angle A (illustratively 66 degrees), while the lower frame member **94** is angled downwardly from the horizontal axis **96** by angle B (illustratively 72 degrees). A deflector **98** is coupled to the lower frame member **94** and is configured to prevent water from collecting at the bottom of the signal interface assembly **12**. As shown in the illustrative embodiment of FIG. 15, the deflector **98** is angled downwardly from a horizontal axis **100** by an angle C (illustratively 23 degrees) for directing water downwardly and outwardly from the signal interface assembly **12**.

With reference to FIG. 14, the upper frame member **92** includes first and second openings **102** and **104** defined by rectangular mounting flanges **106** and **108**, respectively. Outer surfaces of the mounting flanges **106** and **108** define respective gasket seats **110** and **112**. A plurality of mounting apertures **114** and **116** extend through each mounting flange **106** and **108**, respectively.

The lower frame member **94** includes first and second openings **122** and **124** defined by rectangular mounting flanges **126** and **128**, respectively. Outer surfaces of mounting flanges **126** and **128** define respective gasket seats **130** and **132**. A plurality of mounting apertures **134** and **136** extend through each mounting flange **126** and **128**, respectively.

With reference to FIGS. 11 and 12, a plurality of outer or external electrical interface panels, illustratively signal entry panels **140**, **142**, and **144**, are removably coupled to the outer frame **50** by a plurality of releasable couplers or fasteners, illustratively bolts **146** received within the mounting apertures **114**, **116**, **134**, **136** of the respective frame members **92** and **94** (FIG. 14). An electromagnetic interference (EMI) gasket **148** is received intermediate each signal entry panel **140**, **142**, **144** and its respective gasket seat **110**, **112**, **130**, **132**. The EMI gasket **148** is illustratively formed of an electrically conductive material, such as wire mesh material. In one illustrative embodiment, the EMI gasket **148** comprises a carbon-filled cellular PTFE matrix **150**. A pressure sensitive adhesive (PSA) **152** may be supported by a rear surface of the matrix **150**.

Each outer signal entry panel **140**, **142** and **144** may be customized with a variety of different electrical connectors or ports as desired by the user for providing electrical communication with components external to the shelter assembly **18**. As further detailed herein, the outer signal entry panels **140**, **142**, **144** are modular and may be easily removed and replaced with other electrical interface panels. While illustrative outer signal entry panels **140**, **142**, and **144** are shown to include certain types, arrangements, and numbers of electrical connectors, it should be appreciated that a wide variety of substitutions may be made therefor.

In the illustrative embodiment, outer signal entry panel **140** each include a telephone HAUC connector **154**. HAUC connectors **154** are known and include a housing **156** supporting a receptacle for mating with a telephone, illustratively a handset including a microphone and a speaker (not shown). A cap **158** is removably coupled to the housing **156**, while a cable **160** retains the cap **158** to the housing **156** (FIG. 12). The signal entry panel **142** illustratively includes a plurality of telephone push pins **162**, and data ports **164** and **166**. Data ports **164** illustratively comprise Tactical Digital Information Link (TADIL) connectors, such as TADIL-J 1553 bayonet couplings. Data ports **166** illustratively comprise female cable connectors, such as category 5 (CAT-5e) cable connectors. The outer signal entry panel **144** illustratively includes a plurality of data ports **168** for coupling to fiber optic cables. Illustratively, the data ports **168** comprise Tactical Fiber Optic Cable Assembly (TFOCA-11) connectors including a housing **170** and threadably coupled protective caps **172**.

With reference to FIGS. 13, 16, and 17, the inner frame **52** illustratively includes an upper frame member **174** and a lower frame member **176** disposed within a common substantially vertical plane. The upper frame member **174** includes first and second openings **180** and **182** defined by rectangular mounting flanges **184** and **186**, respectively. Outer surfaces of the mounting flanges **184** and **186** define respective gasket seats **188** and **190**. A plurality of mounting apertures **192** and **194** extend through each mounting flange **184** and **186**, respectively. The lower frame member **176** includes first and second openings **198** and **200** defined by rectangular mounting flanges **202** and **204**, respectively. Outer surfaces of the mounting flanges **202** and **204** define respective gasket seats **206** and **208**. A plurality of mounting apertures **210** and **212** extend through each mounting flange **202** and **204**, respectively.

A plurality of inner or internal electrical interface panels, illustratively signal entry panels **214**, **216**, and **218**, are removably coupled to the inner frame **52** by a plurality of releasable couplers or fasteners, illustratively bolts **220** received within the mounting apertures **192**, **194**, **210**, **212** of respective frame members **174** and **176**. An EMI gasket **222** is received intermediate each signal entry panel **214**, **216**, **218** and its respective gasket seat **188**, **190**, **206**, **208**. The EMI gaskets **222** are illustratively of a similar construction as EMI gaskets **148** detailed above.

Each inner signal entry panel **214**, **216**, **218** may be customized with a variety of different electrical connectors or ports as desired by the user for providing electrical communication with components internal to the shelter assembly **18**. As further detailed herein, the panels **214**, **216**, **218** are modular and may be easily removed and replaced with other electrical interface panels as desired. While illustrative inner signal entry panels **214**, **216**, and **218** are shown to include certain types, arrangements, and numbers of electrical connectors, it should be appreciated that a wide variety of substitutions may be made therefor.

In the illustrative embodiment, inner signal entry panels **214** each include a plurality of telephone connectors, illustratively RJ-45 modular connectors **224**. The signal entry panel **216** illustratively includes a plurality of telephone push pins **226** and data ports **228** and **230**. Data ports **228** illustratively comprise TADIL connectors, such as TADIL-J 1553 bayonet couplings. Data ports **230** illustratively comprise female cable connectors, such as category 5 (CAT-5e) cable connectors. The signal entry panel **218** illustratively includes fiber optic couplings **232**, such as SC MMSM connectors. A ground stud **234** may also be supported by the inner frame **52**.

Electrical wires or cables **236**, **238**, **240**, **242** illustratively connect the outer signal entry panels **140**, **142**, **144** with the inner signal entry panels **214**, **216**, **218**, respectively. More particularly, the cables **236**, **238**, **240**, **242** extend between the outer frame **50** and the inner frame **52** through the chamber **54** of the support **44** (FIG. **18**). The HAUC connectors **154** of outer signal entry panel **140** are illustratively coupled to the modular connectors **224** of panel **214** by cables **236**. The push pins **162** of the outer signal entry panel **142** are illustratively coupled to the push pins **226** of the inner signal entry panel **216** by cables **238**. The data ports **164** and **166** of the outer signal entry panel **142** are coupled to the data ports **228** and **230** of panel **216** by cables **240** and **242**, respectively. Similarly, the ports **168** of the outer signal entry panel **144** are illustratively coupled to the couplings **232** of the internal signal entry panel **218** through cables (not shown). As desired, lighting arrestors and filters (not shown) may be electrically coupled to the cables **236**, **238**, **240**, **242** and received within the chamber **54**.

With reference to FIGS. **19-22**, the cover **76** is pivotably coupled to the top wall **56** of the housing **48** by a first hinge **78**. The cover **76** illustratively includes a substantially planar body **244** having an outer surface **245** extending between first and second sides **246** and **247** and between opposing upper and lower ends **248** and **249**. While the body **244** of the cover **76** may be formed in a wide variety of sizes, the illustrative embodiment has a width *cw* of approximately 13 inches, and a height *ch* of approximately 20 inches (FIG. **21**). In one illustrative embodiment, the cover **76** is formed of 0.090 inch thick aluminum sheet. The first hinge **78** is coupled to the body **244** proximate the upper end **248**, while the latching mechanisms **90** are secured to the body **244** proximate the lower end **249** near opposing sides **246** and **247**. In the illustrative embodiment as shown in FIG. **22**, a peripheral lip or flange **250** extends inwardly from the body **244** by a distance *cf* (illustratively about 0.50 inches).

With reference to FIGS. **20** and **23**, the first hinge **78** illustratively includes a plurality of spaced apart connecting members **252**. Each connecting member **252** illustratively includes a detent assembly **254** to releasably secure the cover **76** in one of a plurality of angular positions. More particularly, the cover **76** in FIG. **22** is shown in solid in a stowed position substantially vertical (i.e., parallel with the vertical wall **26**). The cover **76** may be pivoted upwardly by angle α (illustratively about 90 degrees) to a fully raised position, and by angle β (illustratively about 45 degrees) to an intermediate deployed position.

As shown in FIG. **23**, each connecting member **252** illustratively includes a first pivot body **256** and a second pivot body **258** operably coupled together for pivoting movement by a pivot pin **260**. Torsion springs **261** may be provided to angularly bias the second pivot body **258** away from the first pivot body **256**. As such, the springs **261** assist the user in raising the cover **76**.

The pivot pin **260** of each connecting member **252** illustratively includes a first member **262** having a head **264** at a first end, and a cavity **266** at an opposing second end. A second member **268** is concentrically received within the cavity **266** of the first member **262**. More particularly, a portion **270** adjacent the first end of the second member **268** is fixed within the cavity **266**, and a head **272** is positioned adjacent the second end. The first and second members **262** and **268** are secured together such that the first and second pivot bodies **256** and **258** are captured between the heads **264** and **272**.

The detent assembly **254** illustratively includes spaced apart first and second sliders **273** and **274** configured to coop-

erate with recesses or detents **276** and **278**, respectively, formed within the pivot body **256**. More particularly, each slider **273**, **274** is configured to be releasably received within a cooperating detent **276**, **278** in each of the angular positions shown in FIG. **22**. The sliders **273** and **274** illustratively comprise sleeves received over the pivot pin **260** and supported for sliding movement along the longitudinal axis **280** of the pin **260**. More particularly, a spring **282** is configured to bias the sliders **273** and **274** in opposite directions along the longitudinal axis **280** and into selected ones of the detents **276** and **278**. When the sliders **273** and **274** are biased within the detents **276** and **278**, the cover **76** is releasably secured within one of the angular positions shown in FIG. **22**.

As shown in FIG. **19**, a protective flap or shield **284** may extend over the first hinge **78** to prevent environmental elements (e.g., rain, sand and dirt) from passing through gaps in the hinge **78** and to the outer signal entry panel **140**, **142** and **144**. More particularly, the protective shield **284** illustratively comprises a flexible sheet having a first or upper end **286** secured to the first hinge **78** by fasteners, such as screws, and a second or lower end **288** free to move relative to the cover **76**. Illustratively, the protective shield **284** is formed of a durable and flexible material, such as an elastomeric sheet.

With reference to FIGS. **24-34**, each side wing **80** is pivotably coupled by a plurality of second hinges **82** to a spacer or standoff **290**. In turn, each standoff **290** is secured to a side wall **58**, **60** of the housing **48** (FIG. **5**). Each standoff **290** may be formed of an elastomeric body **292** secured to the side wall **58**, **60** by a plurality of fasteners, such as screws **294**. The standoffs **290** provide clearance from the sidewalls **58** and **60** to accommodate pivoting movement of the side wings **80**.

Each side wing **80** illustratively includes a substantially planar body **296** extending between a first side **298** and a second side **300**. While the body **296** of each side wing **80** may be formed from a wide variety of rigid, durable materials, in the illustrative embodiment the body **296** is formed of 0.125 inch thick aluminum sheet. The first side **298** includes a substantially vertical edge **302**, while the second side **300** illustratively includes an angled edge **304**. The second side **300** illustratively includes an inwardly extending lip or flange **306**. As shown in the illustrative embodiment of FIG. **31**, the flange **306** extends inwardly from the body **296** by a distance *sf* (illustratively about 0.88 inches).

With reference to FIGS. **28** and **30**, the body **296** of each side wing **80** has a substantially triangular shape with an apex **308** at an upper end **310** and a base **312** at a lower end **314** (FIG. **24**). As shown in FIG. **30**, the vertical edge **302** is illustratively angled relative to the angled edge **304** by approximately 17 degrees. The second hinges **82** are coupled to the body **296** proximate the first side **298** and provide for pivoting movement of the wings **80** from the stowed position of FIGS. **8** and **9** to the deployed position of FIGS. **6** and **10**. The base **312** includes a cut-out or notch **316** defining opposing first and second sections of the body **296**, illustratively first and second tabs **318** and **320**. The notch **316** is configured to provide clearance for a portion of the latching mechanism **90** when the cover **76** and the side wings **80** are in their stowed positions. The base **312** of the body **296** illustratively has a width *sw* of approximately 5.4 inches (FIG. **28**), while the vertical edge **302** illustratively has a height *sh* of approximately 16 inches (FIG. **30**). The angled edge **304** illustratively has a length *sl* of approximately 16.02 inches (FIG. **31**). Additional illustrative dimensions of the tabs **318** and **320** defining the notch **316** are shown in FIG. **30**.

With reference to FIG. **27**, each of the plurality of second hinges **82** illustratively includes a first pivot body **322** operably coupled to a second pivot body **324** by a pivot pin **326** to

provide pivoting movement therebetween. The first pivot body 322 is secured to the standoff 290 while the second pivot body 324 is secured to the respective side wing 80. A torsion spring 328 is configured to angularly bias about the pivot pin 326 the second pivot body 324 away from the first pivot body 322. As such, the torsion spring 328 biases the respective side wings 80 outwardly about vertical axis 86 (FIG. 26) from the stowed position (FIG. 4) to the deployed position (FIG. 6).

As explained above, the latching mechanisms 90 are configured to secure together the cover 76 and the side wings 80 in a plurality of configurations. More particularly, in the illustrative embodiment, the latching mechanisms 90 are configured to secure together the cover 76 and the side wings 80 in relative positions in either of their respective stowed or deployed configurations.

FIGS. 8 and 9 show locked and unlocked positions (in solid and hidden lines, respectively) of latching mechanism 90 when the cover 76 and side wings 80 are in their stowed configurations. In the stowed configurations, the cover 76 and the side wings 80 extend substantially parallel to each other and to the vertical wall 26 to define a substantially flush outer surface 323 (FIG. 1). As further shown in the stowed configurations of FIGS. 8 and 9, the first side 298 of each side wing 80 is positioned adjacent the flange 250 at respective sides 246 and 247 of the cover 76. As detailed in FIG. 9, the latching mechanisms 90 secure the first tabs 318 of each side wing 80 to the cover 76. The standoff 290 may serve as a buffer or stop to contact the flange 250 at respective sides 246 and 247 of the cover 76.

FIGS. 6 and 10 show locked and unlocked positions (in solid and hidden lines, respectively) of the cover 76 and the side wings 80 are in their deployed configurations. In the deployed configurations, the cover 76 is angled upwardly from its vertical position by angle β of about 45 degrees from its position of FIG. 8. As shown in FIG. 6, the side wings 80 are angled outwardly from their folded positions of FIG. 8 by about 90 degrees. As shown in the deployed configurations of FIGS. 6 and 10, the second side 300 of each side wing 80 is positioned adjacent the flange 250 at the respective sides 246 and 247 of the cover 76. As detailed in FIG. 10, the latching mechanisms 90 secure the flange 250 at the second side tabs 320 of each side wing 80 to the cover 76.

With further reference to FIGS. 6-10, each latching mechanism 90 illustratively includes a handle 325 received within a recess 327 formed in the outer surface 245 of the cover 76. A lever arm 329 is coupled to the handle 325 and is configured to pivot about a pivot pin 330. An adjustable clamp 332 is supported at a first end of the lever arm 329, while the handle 325 is coupled to the second end of the lever arm 329. The clamp 332 includes a threaded stud 334 cooperating with a nut 336 for adjusting the position of a resilient bearing member 338. The latching mechanism 90 defines an over-center clamp by the handle 325 and the lever arm 329 being positioned on opposite sides of the pivot pin 330.

The latching mechanism 90 is in a locked or clamped position when the handle 325 is substantially parallel to the outer surface 245 of the cover 76 (shown in solid lines in FIGS. 9 and 10). FIG. 9 shows the stowed configuration where the clamp 332 in the lock position secures the first tab 318 of the side wing 80 to the body 244 of the cover 76. FIG. 10 shows the deployed configuration where the clamp 332 in the locked position secures the second tab 320 of the side wing 80 to the body 244 of the cover 76. By the user inserting a finger within an opening 340 adjacent to the handle 325, the handle 325 may be lifted or pulled outwardly away from the cover 76 such that the handle 325 and the lever arm 329 are pivoted about pivot pin 330 (to the position shown in hidden

lines in FIGS. 9 and 10). Once the cover 76 and cooperating side wings 80 are positioned as desired (i.e., stowed or deployed), the handle 325 may be pushed back into the recess 327 and flush with the outer surface 245 of the cover 76. The lever arm 329 rotates such that the clamp 332 secures the cover 76 to the respective side wing 80.

An illustrative method of accessing an interface panel of signal interface assembly 12 comprises the steps of releasing the latching mechanisms 90 securing cover 76 to the side wings 80 (FIGS. 8 and 9) when in the stowed configuration. In the stowed configuration, the cover 76 extends substantially parallel to the side wings 80 to provide a flush outer surface to the support 44. To release the latching mechanisms 90, the handles 325 are pivoted outwardly from the recesses 327 of cover 76. In response, the lever arms 329 unclamp the cover 76 from the first tabs 318 of the side wings 80. Next, the cover 76 is pivoted upwardly about horizontal axis 100, illustratively by angle α to the fully raised position shown in FIG. 22. The detent assemblies 254 are configured to releasably hold the cover 76 in this position.

The side wings 80 are then pivoted outwardly about vertical axis 86 into the deployed position shown in FIG. 6. The step of pivoting the side wings 80 outwardly includes biasing the side wings 80 through a spring 282. The cover 76 is then lowered (pulling down will release the detent assemblies 254) to the deployed position represented by angle β in FIG. 22. In the deployed configuration, the cover 76 extends substantially perpendicular to the side wings 80 and at an acute angle relative to vertical. In this position, the flange 250 of the cover 76 receives the second tab 320 of each side wing 80 in a nesting arrangement. Next, the latching mechanisms 90 are engaged to secure the cover 76 to the side wings 80. More particularly, the handles 325 are pivoted inwardly into the recesses 327 of the cover 76. In response, the lever arms 329 clamp the cover 76 to the second tab 320 of the side wings 80.

A method of installing a signal entry panel comprises the steps of providing support 44, and coupling signal entry panel 140, 142, 144, 214, 216, 218 to the support 44. The support 44 illustratively includes outer frame 50 and inner frame 52. EMI gasket 148 is positioned adjacent the outer frame 50, and the outer signal entry panel 140, 142, 144 is positioned adjacent the outer frame 50 with the EMI gasket 148 being intermediate the panel 140, 142, 144, and the outer frame 50. Bolts 146 are threadably secured within the outer frame 50 to retain the outer signal entry panel 140, 142, 144 in position.

Cables are illustratively used to electrically couple the outer signal entry panel 140, 142, 144, to the respective inner signal entry panel 214, 216, 218. EMI gasket 222 is positioned against inner frame 52 and the inner signal entry panel 214, 216, 218 is then retained in position through bolts 220 threadably secured within the inner frame 52.

As may be appreciated, the mounting arrangements of the outer and inner signal entry panels 140, 142, 144, 214, 216, 218 facilitate replacement by substitute panels. Moreover, bolts 146, 220 permit removal and replacement of signal entry panels 140, 142, 144, 214, 216, 218 on the outer frame 50 and the inner frame 52, respectively. Once installation is complete, the cover 76 and side wings 80 may be operated as detailed herein to protect the outer signal entry panels 140, 142, 144 from environmental elements.

As shown in FIGS. 35 and 36, a further illustrative signal interface assembly 412 includes many similar features to the embodiments detailed above. As such, similar elements will be identified with like reference numbers. The signal interface assembly 412 illustratively includes flexible side shields 414 configured to extend adjacent, and in laterally spaced

11

relation to, the side wings **80**. In certain embodiments, the flexible side shields **414** may replace the side wings **80**. The side shields **414** further assist in preventing environmental elements, such as water, sand, and debris, from contacting the signal entry panels **214**. The side shields **414** may each comprise an inflatable bladder **416** fluidly coupled to a fluid supply **418**, such as a pneumatic pump or storage canister, through a fluid supply line **420**. A first end of the bladder **416** illustratively includes a mounting strip **422** secured to the housing, while a second end of the bladder **416** illustratively includes a magnetic coupler **424** for releasable coupling to an inner surface of the cover **76**.

FIG. **35** shows the bladder **416** in a deflated state and disconnected from the cover **76**, while FIG. **36** shows the bladder **416** inflated and coupled to the cover **76**. The fluid supply **418** may be activated for inflating the bladder **416** through a user interface, such as a user controlled switch, or through a sensor, such as a limit switch **426** configured to detect when the cover **76** is raised.

FIG. **37** shows a further illustrative signal interface assembly **512** having many similar features to the embodiments detailed above. As such, similar elements will be identified with like reference numbers. As with the signal interface assembly **412**, the signal interface assembly **512** includes flexible side shields **514** configured to extend adjacent, and in laterally spaced relation to, the side wings **80**. In certain embodiments, the flexible side shields **514** may replace the side wings **80**. The side shields **514** may each comprise a flexible curtain **516** having a first end secured to the housing **48**, and a second end coupled to the cover **76**.

Each curtain **516** illustratively includes a plurality of foldable panels **518** supported between braces **520**. The panels **518** are configured to collapse or fold in an accordion fashion. A releasable coupler, such as a hook and look fastener **522**, illustratively secures the second end of the flexible curtain **516** to the cover **76**. More particularly, a hook portion **524** may be secured to the cover **76**, and a mating loop portion **526** may be secured to the curtain **516**.

A retractor **528** is illustratively configured to fold the curtain **516**. Retractor **528** may include a cord **530** supported on a rotatable spool **532**. As the cord **530** is wound onto the spool **532**, the second end of the curtain **516** is retracted and the curtain **516** folds or retracts inwardly. A drive mechanism (not shown) may be operably coupled to the spool **532** for imparting rotation thereof.

While this invention has been described as having an exemplary design, the present invention may be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains.

What is claimed is:

1. An electrical interface assembly configured to be supported within a wall of a mobile structure, the electrical interface assembly comprising:

a housing comprising a plurality of opposing walls comprising a top, bottom and two side walls, said plurality of walls enclose a cavity and have a first opening formed by a housing edge section of said walls;

a frame including an outer support and an inner support spaced apart from the outer support, wherein said frame assembly is positioned within said housing and coupled to said walls of said housing, said outer support is recessed within said housing such that it is set back from said first opening;

12

an exterior panel supported by the outer support and including at least one electrical connector;

a first plurality of couplers removably coupling the exterior panel to the outer support;

an outer electromagnetic interference gasket positioned intermediate the exterior panel and the outer support;

an interior panel supported by the inner support and including at least one electrical connector;

a second plurality of couplers removably coupling the interior panel to the inner support;

an inner electromagnetic interference gasket positioned intermediate the interior panel and the inner support;

a cable electrically coupled intermediate the at least one electrical connector of the exterior panel and the at least one electrical connector of the interior panel;

at least one first hinge adapted to move about a first axis of rotation, wherein said first hinge further comprises a structure that includes a spring or lever detent structure which releasably locks said hinge assembly in a plurality of positions comprising a first and second position;

a cover adapted to fit into said first opening in said housing with a gap of less than a quarter of an inch between an edge section of said housing's walls and said cover, said cover is pivotably coupled to the housing by said at least one first hinge;

a plurality of second hinges, said hinge is spring loaded to apply a force to rotate said hinge around a second axis of rotation from a first position to a second position wherein said first and second axis of rotation are substantially orthogonal to each other;

a first side wing pivotably coupled to a side wall of said housing by at least one said second hinge and a second side wing pivotably coupled to an opposing side wall of said housing in spaced relation to said first side wing, said first and second side wings comprise a substantially triangular and planar body extending between a first side and a second side with an apex at an upper end and a base at a lower end, the first side includes a substantially flat edge, while the second side includes an angled edge section, comprising a lip or flange extending away from the body, said base section includes a cut-out or notch defining opposing first and second sections of the body comprising a first tab section and second tab section, said notch is configured to provide clearance for a portion of the latching mechanism when the cover and the side wings are positioned to oriented towards each other within said housing; and

a first latch positioned on a first section of said cover configured to releasably secure the cover to the first tab of said first side wing in a third position, said first coupler is also positioned and configured to releasably secure the cover to the lip or flange of said first side wing in proximity to said second tab on said second side of said first side wing in a fourth position, wherein said third position is a closed position that is substantially parallel to a plane defined by said first opening;

wherein the outer frame includes an upper frame member coupled to a lower frame member, the upper frame member angled relative to the lower frame member.

2. The electrical interface assembly of claim 1, wherein the frame is adapted to be supported by a wall of a mobile shelter.

3. The electrical interface assembly of claim 2, wherein the frame includes a flange for mounting to the wall.

4. The electrical interface assembly of claim 1, wherein the exterior panel includes a plurality of electrical jacks.

13

5. The electrical interface assembly of claim 4, further comprising removable caps covering at least some of the electrical jacks.

6. The electrical interface assembly of claim 4, wherein the electrical connector is a telephone connector receptacle.

7. The electrical interface assembly of claim 4, wherein the interior panel includes a plurality of electrical connectors.

8. The electrical interface assembly of claim 7, wherein the electrical connectors include category 5 cable couplers.

9. A method of installing a signal entry panel, the method comprising the steps of:

providing a support including an outer support and an inner support spaced apart from the outer support, said support further comprising an upper section, a lower section, and first and second opposing side sections, wherein said opposing side sections are on opposite sides of said outer support and said upper section and lower section are above and below said outer support;

positioning an electromagnetic interference gasket adjacent the outer support;

positioning an outer signal entry panel adjacent the outer support with the electromagnetic interference gasket intermediate the signal entry panel and the outer support, the outer signal entry panel including at least one electrical connector;

securing a plurality of couplers to the signal entry panel for releasably coupling the signal entry panel to the outer support;

positioning an inner signal entry panel adjacent the inner support, the inner signal entry panel including at least one electrical connector;

electrically coupling the outer signal entry panel with the inner signal entry panel;

providing a cover adapted and sized to cover said outer support and outer signal entry panel;

providing at least one first hinge adapted to releasably lock and rotate round a first axis, said at least one first hinge is coupled to upper section of said support and to a first section of said cover;

providing a first and second side wing having a body formed into substantially a triangular shape and further comprising a base section opposing an apex of said triangular shape, said first side wing is coupled to said first opposing side section of said support with at least one spring loaded second hinge, said second side wing is coupled to said second opposing side section of said support with at least one said spring loaded second hinge, said base section of said first and second side wings further comprising a cut out section forming a first and second tab section on opposing side areas of said base section, said first tab is formed with substantially a planar form, said base section further comprises a flange which is in proximity to said second tab and extends away from a plane defined by said body; and

providing a first latch positioned on second section of said cover, said first latch is configured to releasably secure the cover to the first tab of said first side wing when said first side wing and said cover is in a first configuration, said first latch is also positioned and configured to releasably secure the cover to the flange of said first side wing when said second side wing and said cover are in a second configuration.

14

10. The method of claim 9, further comprising the steps of: releasing a plurality of couplers from the outer signal entry panel;

removing the outer signal entry panel from the outer support;

positioning a substitute signal entry panel adjacent the outer support; and

securing the plurality of couplers to the substitute signal entry panel for releasably coupling the signal entry panel to the outer support.

11. The method of claim 9, wherein a chamber is defined between the outer support and the inner support, the chamber being positioned within the wall of a mobile structure.

12. The method of claim 11, wherein the step of electrically coupling includes extending a cable from between the outer signal entry panel and the inner signal entry panel through the chamber.

13. The method of claim 9, further comprising the step of electrically coupling external communication equipment to the at least one electrical connector of the outer signal entry panel.

14. The method of claim 13, further comprising the step of pivoting said cover upwardly to provide access to the outer signal entry panel.

15. The method of claim 9 wherein said second hinge is adapted to apply a rotational force around a second axis and position said first and second wings perpendicular to said cover when said cover is in said first position.

16. The method of claim 10, further comprising providing a second latch positioned on a third section of said cover, said second latch is configured to releasably secure the cover to the first tab of said first side wing when said first side wing and said cover is in said first configuration, said second latch is also positioned and configured to releasably secure the cover to the flange of said second side wing when said second side wing and said cover are in said second configuration.

17. The electrical interface assembly of claim 1, wherein said substantially triangular and planar body of said first and second side wings is substantially formed in an acute triangle shape.

18. The electrical interface assembly of claim 1, wherein said substantially triangular and planar body of said first and second side wings is substantially formed in an obtuse triangle shape.

19. The electrical interface assembly of claim 1, wherein the outer frame further includes a deflector planar section adapted to convey water or contaminants incident on said deflector away from said lower frame towards said first opening and is operably coupled below the lower frame member and is angled relative thereto, said deflector planar section extends down to said bottom wall and terminates in substantially close proximity to said housing edge section formed by said bottom wall.

20. The electrical interface assembly of claim 1, a second coupler positioned on a second section of said cover configured to releasably secure the cover to the first tab of said second side wing in said third position, said first coupler is also positioned and configured to releasably secure the cover to the lip or flange of said second side wing in proximity to said second tab on said second side of said second side wing in said fourth position.

* * * * *