



US008156050B2

(12) **United States Patent**
Correll et al.

(10) **Patent No.:** **US 8,156,050 B2**
(45) **Date of Patent:** **Apr. 10, 2012**

(54) **PROJECT MANAGEMENT SYSTEM AND METHOD**

(75) Inventors: **Roger L. Correll**, Bloomington, IN (US); **Steven D. Lawyer**, Elnora, IN (US); **Thomas R. O'Brien**, Loogootee, IN (US); **James W. Evans, II**, Bloomington, IN (US); **M. Denise Wittmer**, Odon, IN (US); **Karen B. Hixson**, Bloomington, IN (US)

(73) Assignee: **The United States of America as represented by the Secretary of the Navy**, Washington, DC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 429 days.

(21) Appl. No.: **12/471,701**

(22) Filed: **May 26, 2009**

(65) **Prior Publication Data**

US 2010/0305987 A1 Dec. 2, 2010

(51) **Int. Cl.**
G06F 17/50 (2006.01)
G06F 9/44 (2006.01)

(52) **U.S. Cl.** **705/80**; 705/7.12; 705/7.23; 705/7.26; 705/7.27

(58) **Field of Classification Search** 705/7.23, 705/7.24, 7.26, 7.17, 7.13; 1/1; 700/97, 700/100; 715/771

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,069,278 B2 6/2006 Telkowski et al.
7,353,180 B1 * 4/2008 Silverstone et al. 705/7.11
7,437,675 B2 10/2008 Casati et al.

7,991,632 B1 * 8/2011 Morris et al. 705/7.11
2001/0044781 A1 11/2001 Shutes
2003/0076360 A1 * 4/2003 Barrow 345/771
2003/0135401 A1 * 7/2003 Parr 705/8
2003/0137541 A1 * 7/2003 Massengale et al. 345/764
2003/0187766 A1 * 10/2003 Akashi 705/35
2004/0158739 A1 * 8/2004 Wakai et al. 713/200

(Continued)

FOREIGN PATENT DOCUMENTS

WO WO03088122 10/2003

(Continued)

OTHER PUBLICATIONS

Robert F Cox. "Using Project-Specific Websites to Manage Construction Project Delivery." Buildings Apr. 1, 2007: ABI/INFORM Global, ProQuest. Web. Jan. 19, 2012.*

(Continued)

Primary Examiner — Matthew Gart


Assistant Examiner — Olusegun Goyea

(74) *Attorney, Agent, or Firm* — Christopher A. Monsey

(57) **ABSTRACT**

A project management system comprising a first, second, third, fourth and fifth processing sequences embodied in a computer readable medium. The first processing sequence is operable to provide a user interface to display a plurality of alert indicia corresponding to a plurality of alert status of a plurality of project requirements. The second processing sequence is operable to convert an incomplete requirement to a complete requirement upon completion of a task corresponding to the incomplete requirement. The third processing sequence is operable to determine the alert status of the requirements of the plurality of projects based on a time difference between a current date and a target date corresponding to each requirement. The fourth and fifth processing sequences are operable override the alert status based on user selections.

14 Claims, 25 Drawing Sheets

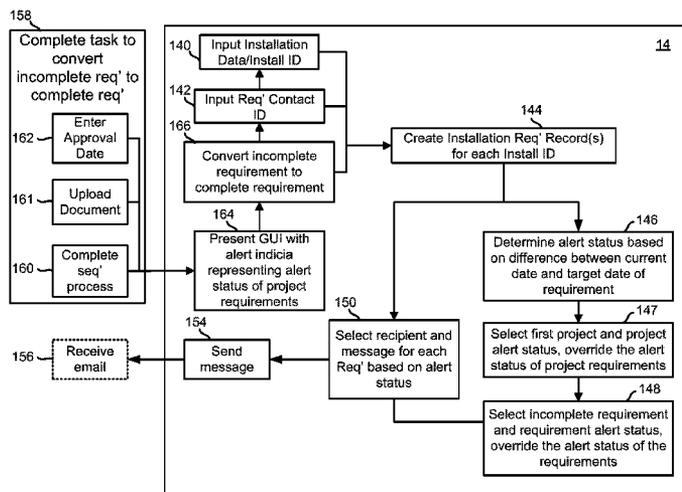

U.S. PATENT DOCUMENTS

2004/0205519	A1 *	10/2004	Chapel et al.	715/502
2004/0243266	A1 *	12/2004	Mata et al.	700/99
2004/0249694	A1 *	12/2004	Luo	705/8
2004/0267595	A1	12/2004	Woodings et al.	
2005/0027386	A1 *	2/2005	Weigand et al.	700/97
2006/0036476	A1 *	2/2006	Klem	705/7
2006/0143220	A1	6/2006	Spencer, Jr.	
2006/0212327	A1 *	9/2006	Norman	705/8
2006/0294235	A1 *	12/2006	Joseph	709/225
2007/0050777	A1 *	3/2007	Hutchinson et al.	718/104
2007/0112652	A1	5/2007	Ricketts	
2007/0255656	A1	11/2007	Olson et al.	
2007/0264107	A1	11/2007	Mifsud et al.	
2008/0021757	A1 *	1/2008	Majd et al.	705/8
2008/0071833	A1 *	3/2008	Madden	707/104.1
2008/0077530	A1 *	3/2008	Banas et al.	705/50
2008/0084333	A1	4/2008	Forrest et al.	
2008/0086359	A1 *	4/2008	Holton et al.	705/10
2008/0228815	A1 *	9/2008	Senn et al.	707/104.1
2008/0255914	A1 *	10/2008	Oren	705/8
2008/0295101	A1 *	11/2008	Vicars et al.	718/102
2008/0313004	A1 *	12/2008	Ryan et al.	705/9
2009/0299811	A1 *	12/2009	Verfuerrth et al.	705/9

2010/0074416	A1 *	3/2010	Smith et al.	379/32.04
2010/0185547	A1 *	7/2010	Scholar	705/80
2010/0277307	A1 *	11/2010	Horton et al.	340/539.11
2010/0322390	A1 *	12/2010	Bialk et al.	379/32.04

FOREIGN PATENT DOCUMENTS

WO	WO2006086690	8/2006
WO	WO2006125090	11/2006
WO	WO2007112952	10/2007

OTHER PUBLICATIONS

Tzvi Raz, Robert Barnes, and Dov Dvir. "A Critical Look at Critical Chain Project Management." Project Management Journal 34.4 (2003): 24. ABI/INFORM Global, ProQuest. Web. Jan. 19, 2012.*
 Collins, Jair, "Selecting the Right Supply Chain for a Customer in Project Business," An Action Research Study in the Mobile Communications Infrastructure Industry; Jan. 8, 2003; Helsinki University of Technology, 251 pages.
 "Microsoft Dynamics GP Project Management/Project Accounting," Microsoft Corporation, 2005, 4 pages.

* cited by examiner

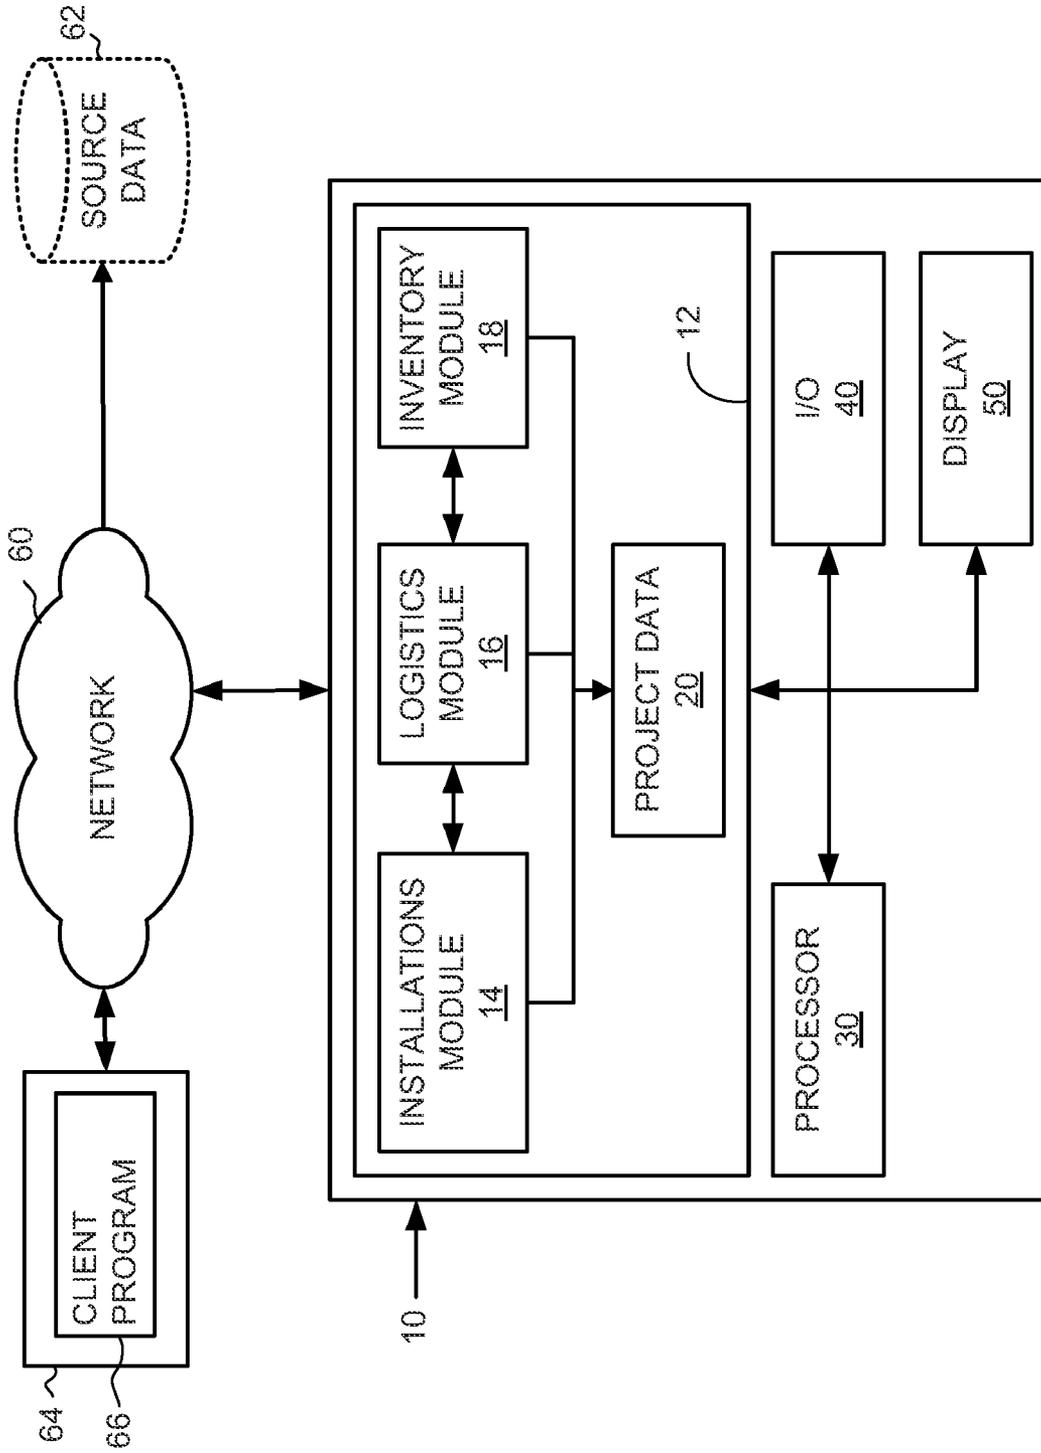


FIG. 1

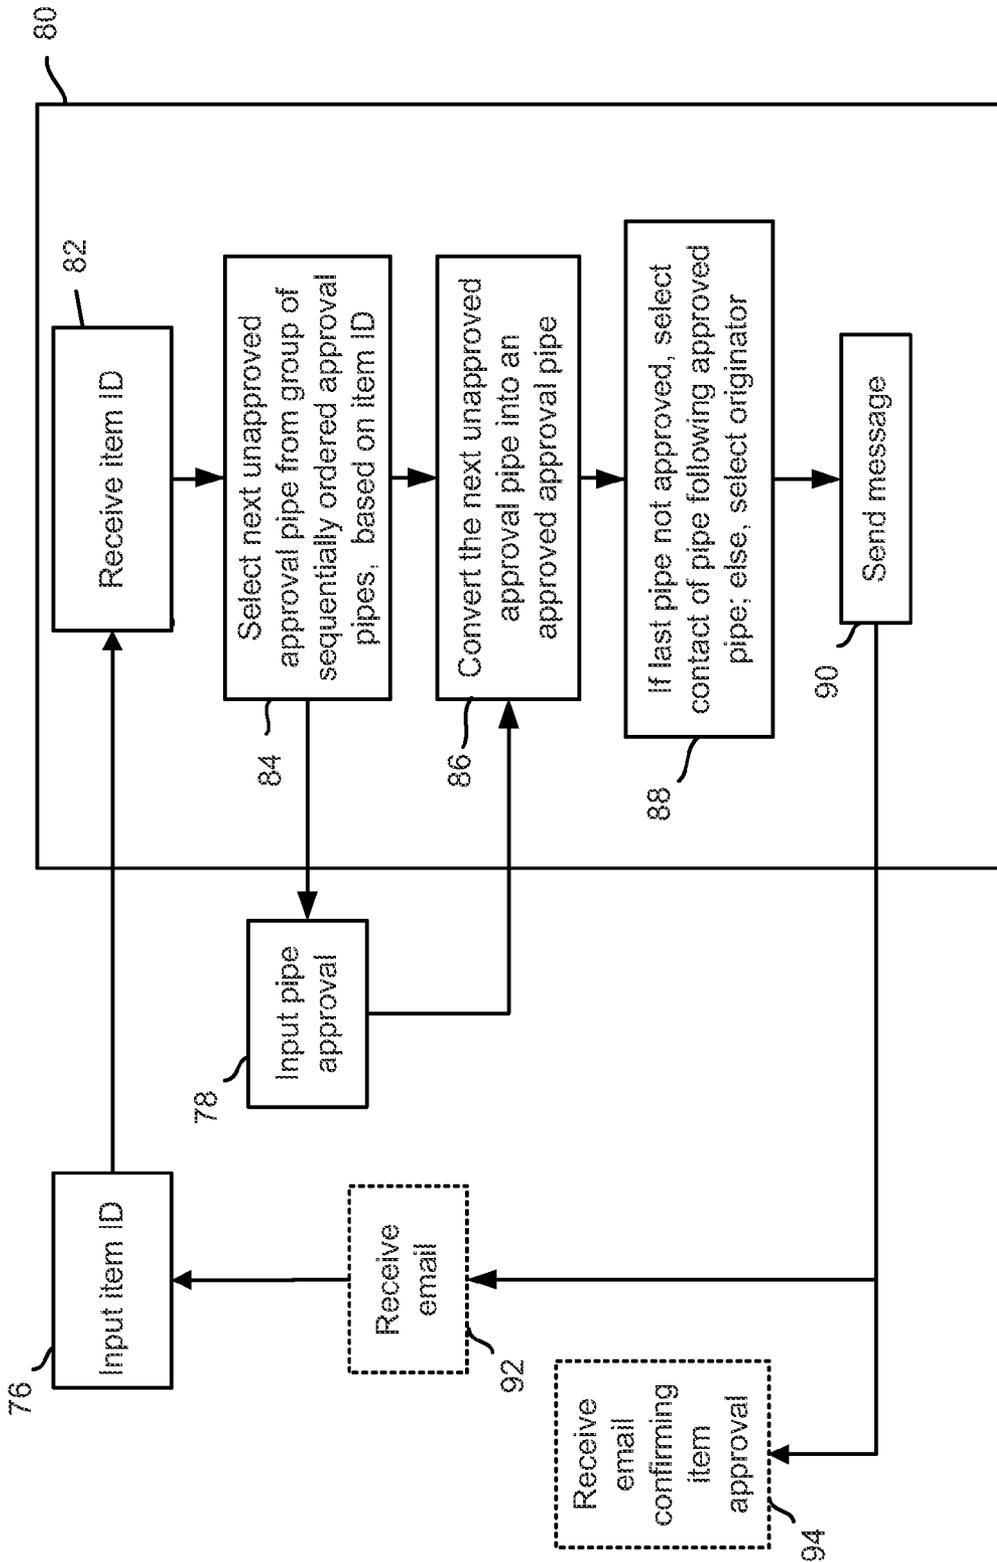


FIG. 2

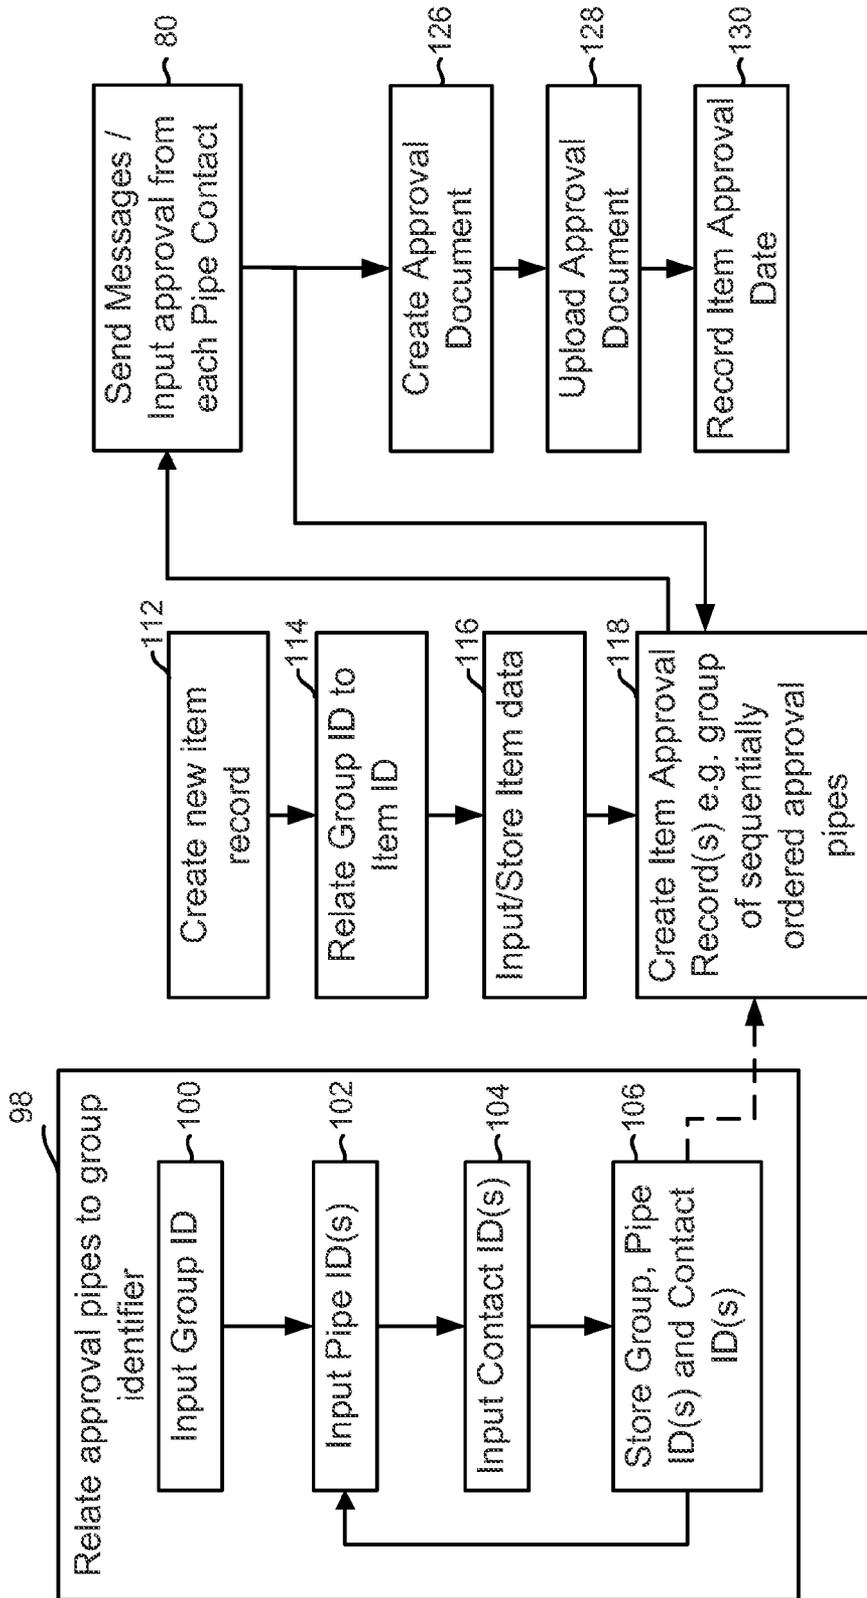


FIG. 3

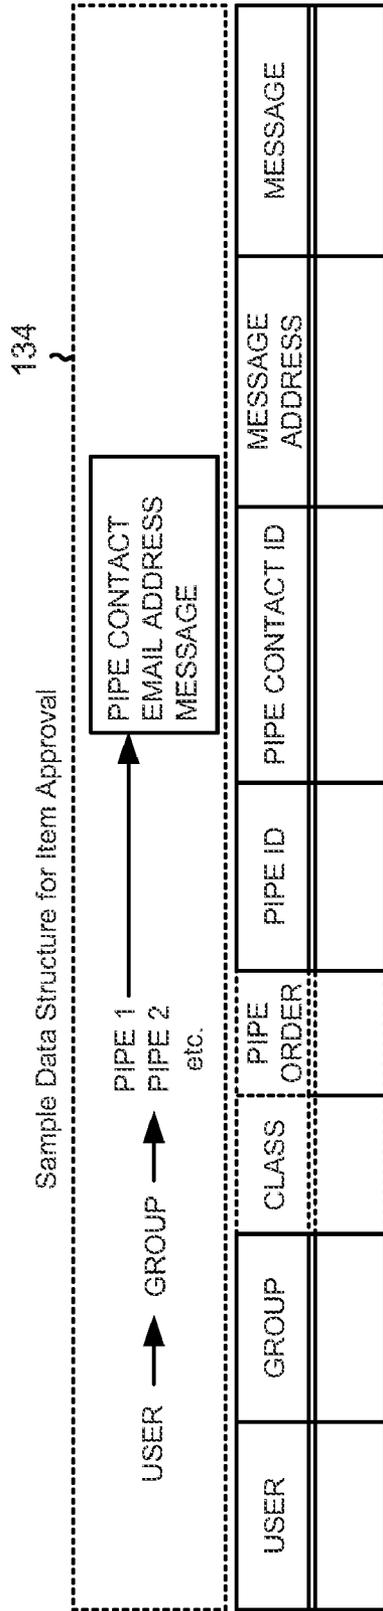


FIG. 4

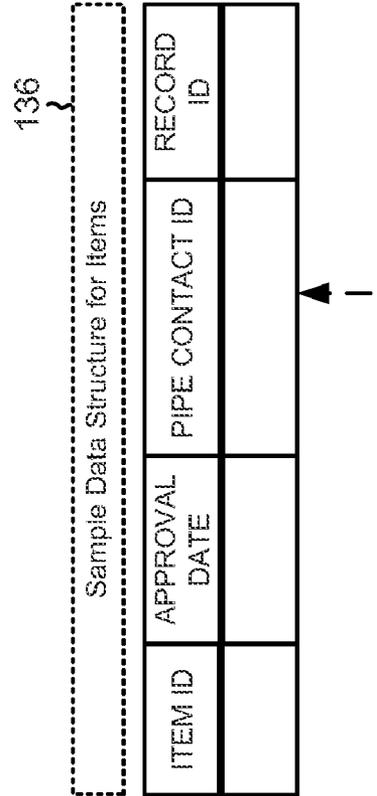


FIG. 5

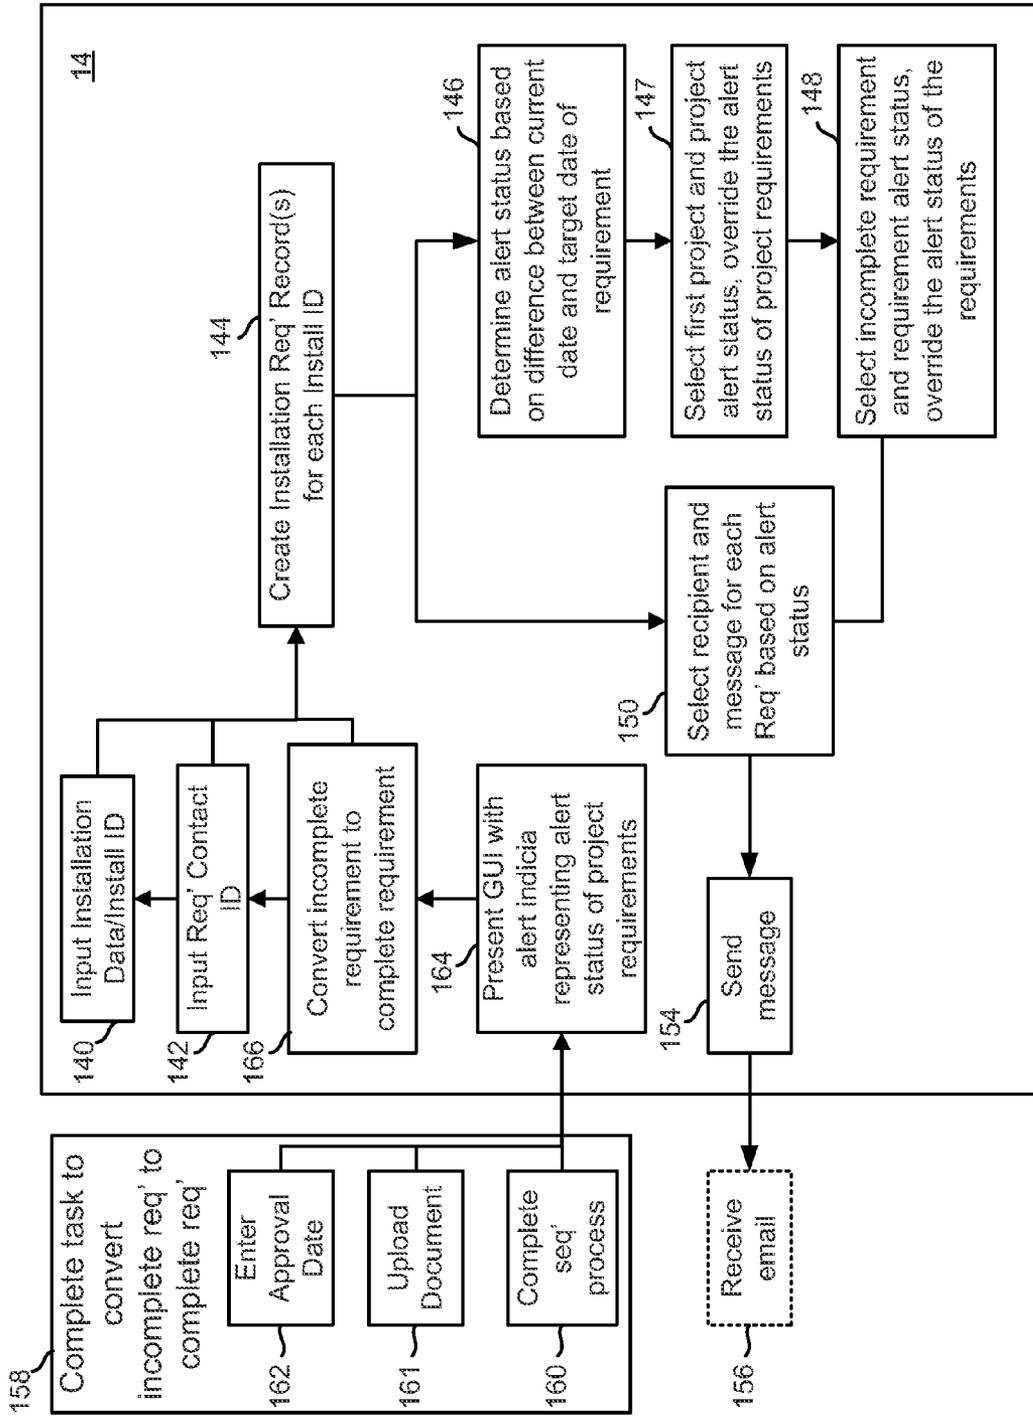


FIG. 6

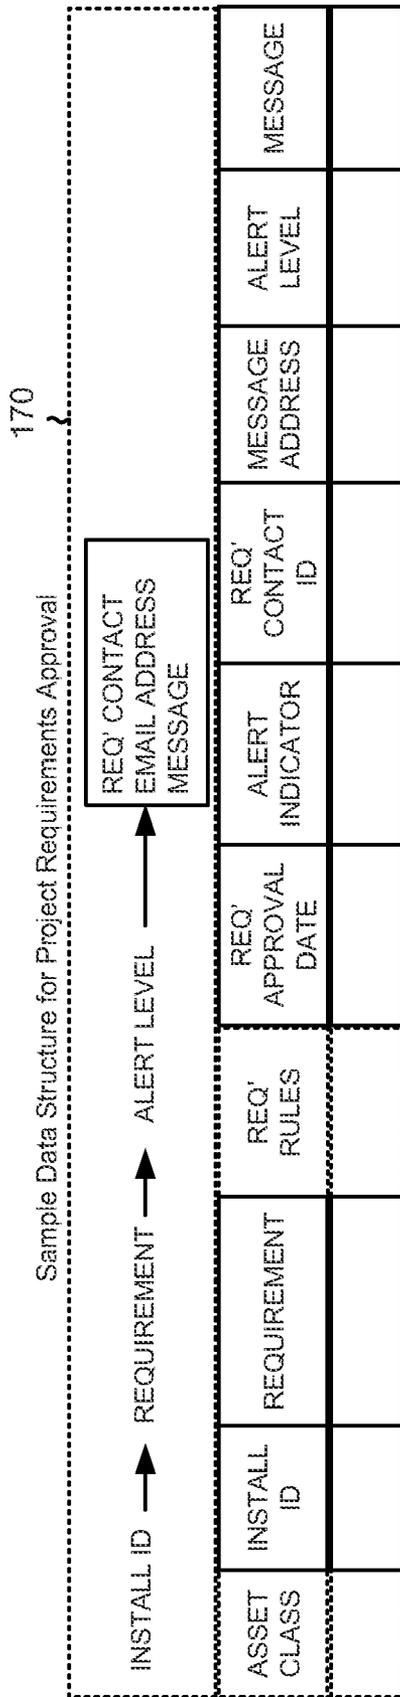


FIG. 7

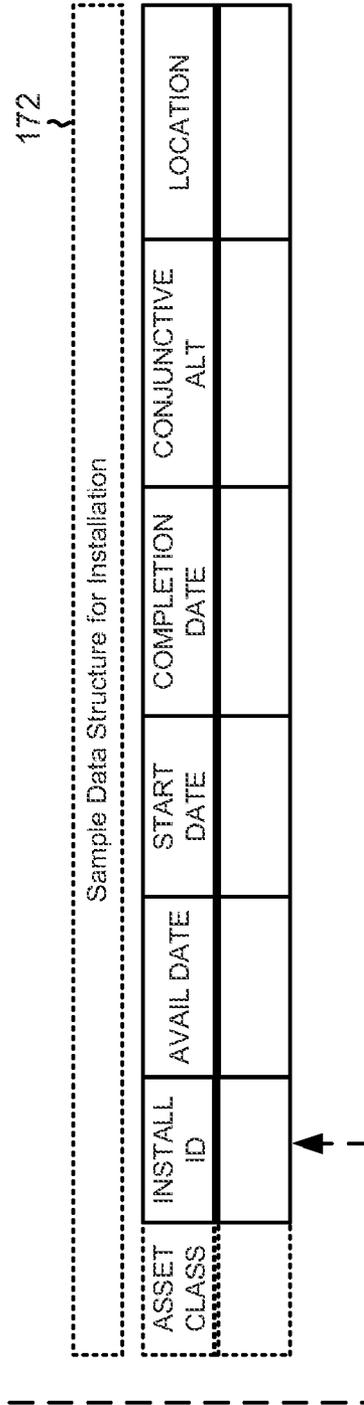


FIG. 8

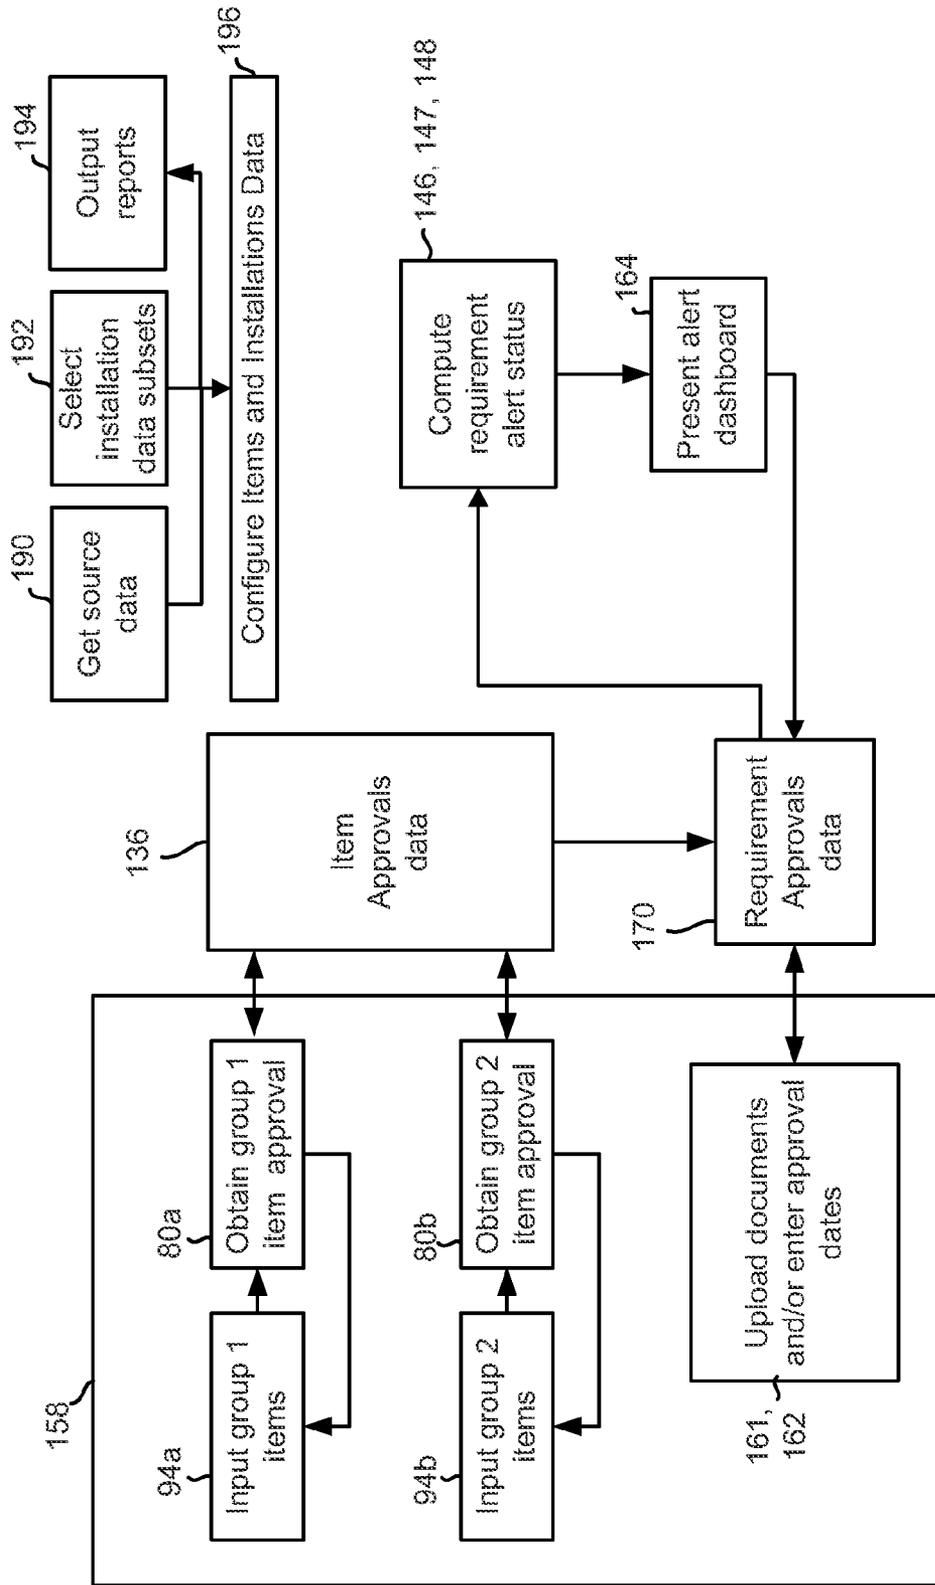


FIG. 9

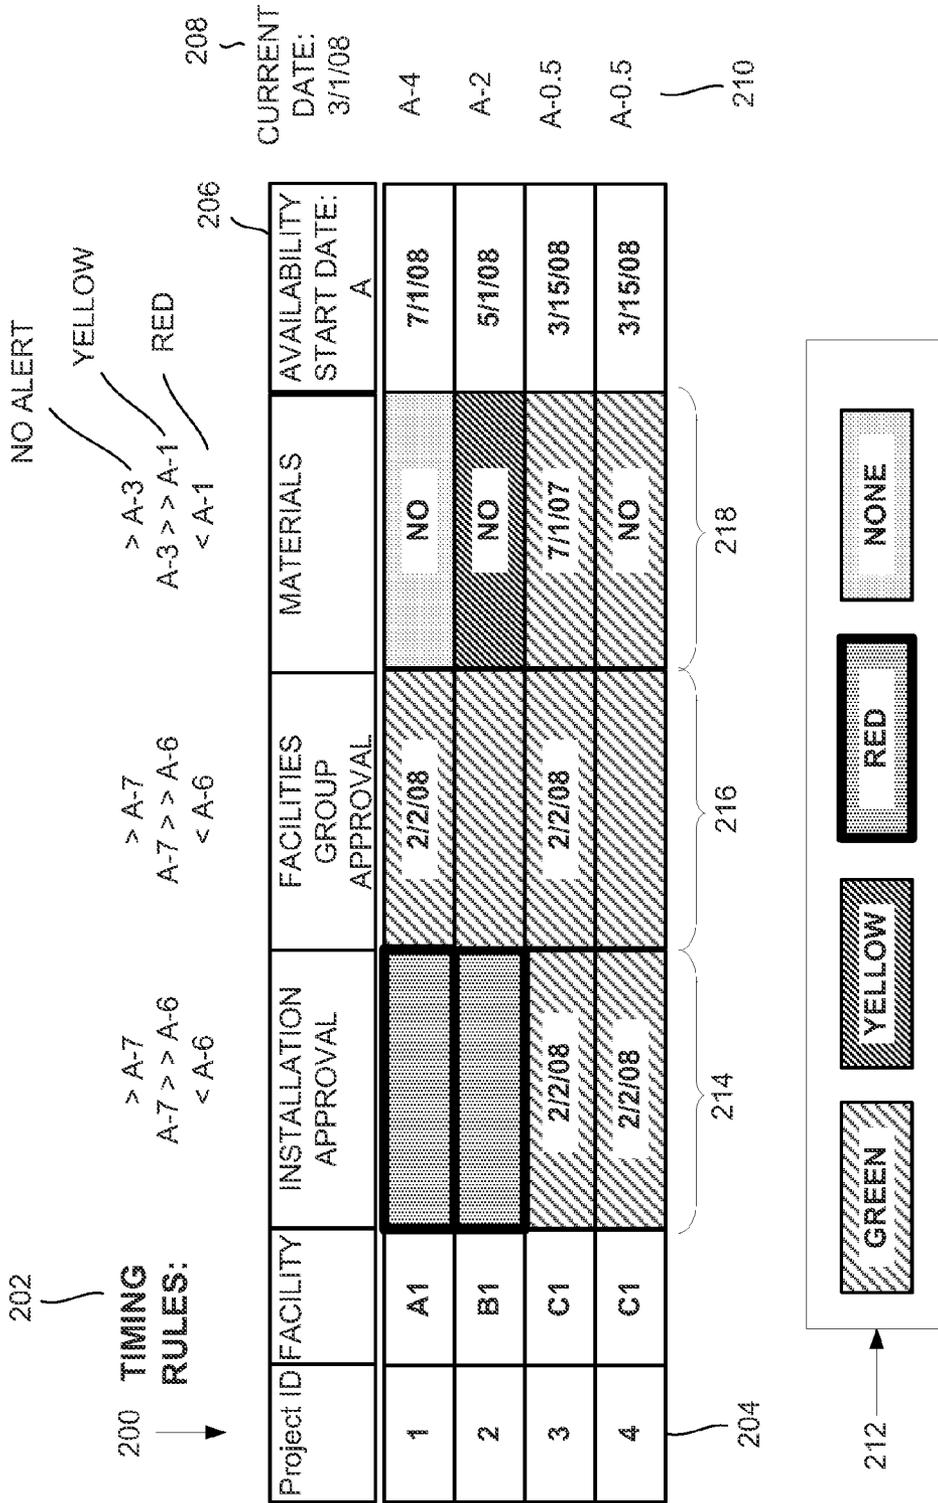


FIG. 10

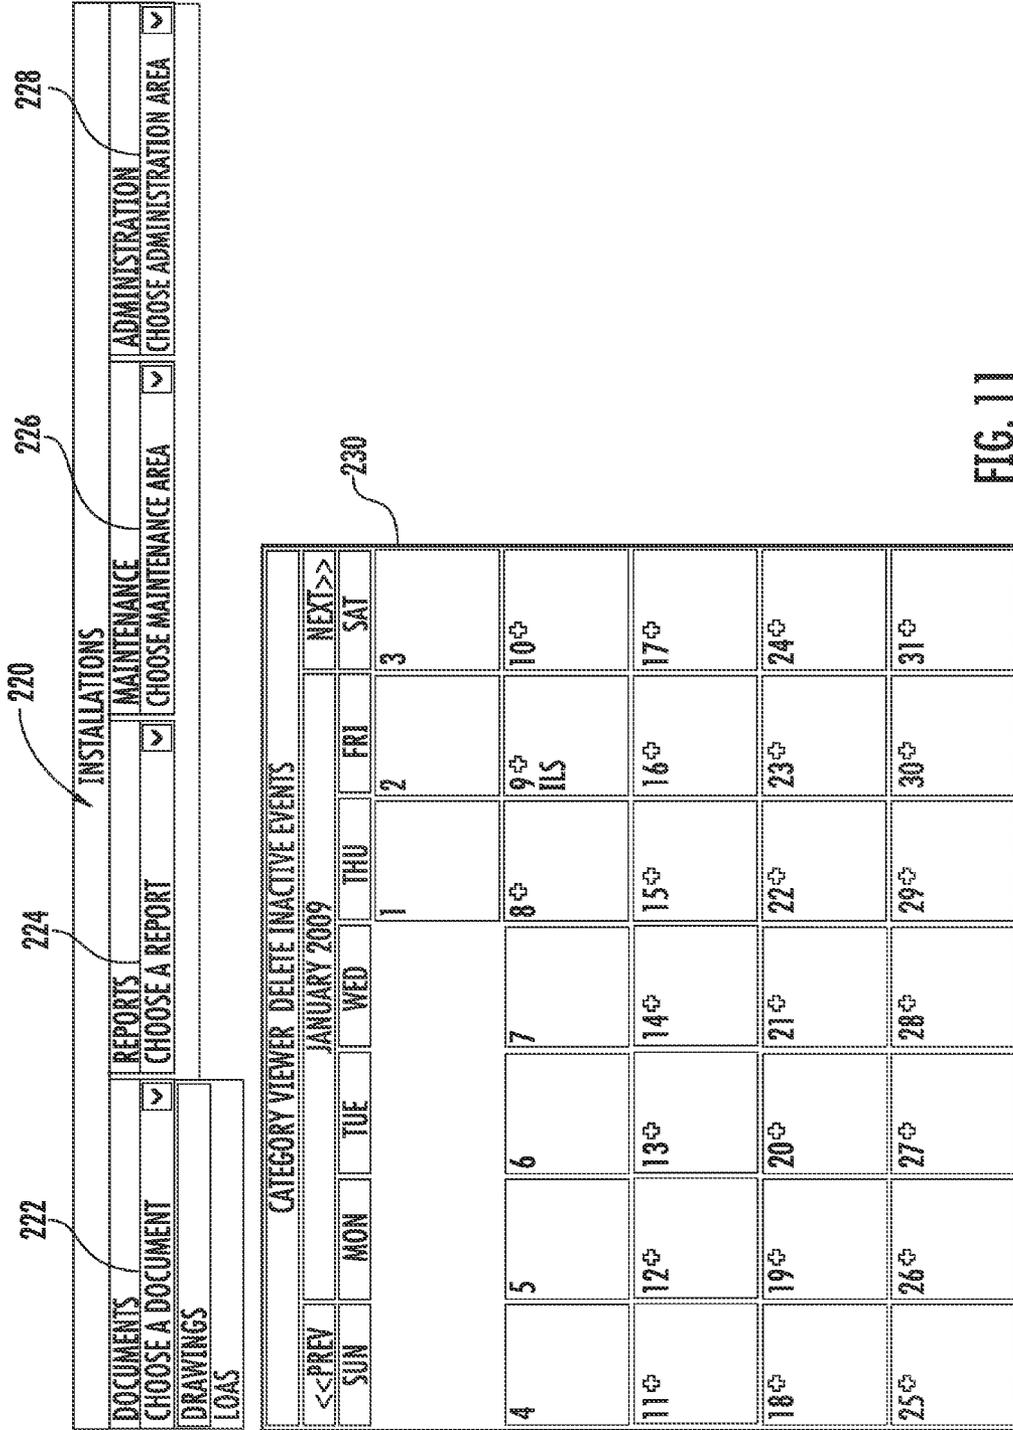


FIG. 11

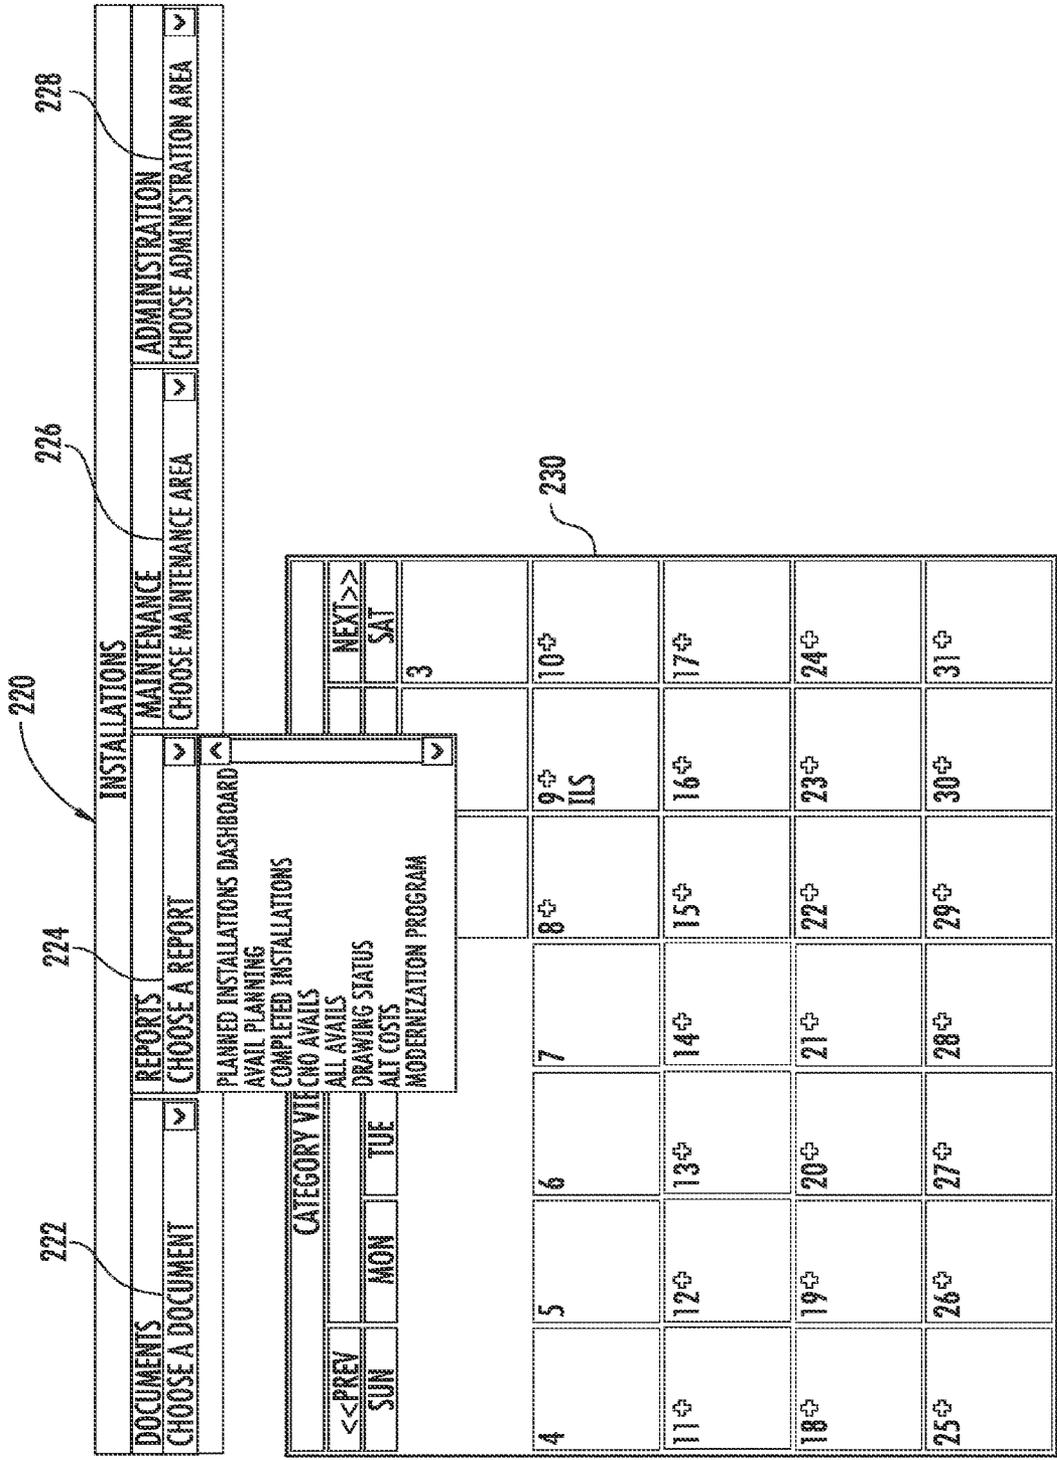


FIG. 12

300

302

310

320

340

304

306

308

PLANNED INSTALLATIONS DASHBOARD

WORKLOAD PLANNER (53) RECORDS

SHIP ALL TYPE ALT IDENTIFIER

BASELINE CON/ALT CON/ALT HUN/ALT START/AVAIL END (CONST)

AVAIL LOCATION/COMMODA STATUS

PLS DATE

SIDS APPROVED

COA

MAIL STATUS

RANKING COMPLETE

NOTES: CG 0052 SNO SNO 73465 BFT 3.3.2

PGC NO

02/13/2008 02/11/2009 PACIFIC 5060

"1"

12/19/2007 NA

ONE-A NOTE 6/10A

WORKLOAD PLANNER SELECTION FORM

PLANNING PERIOD

CLASS: SHIP: ALT ID: START DATE: END DATE: COAST:

DDG 005 ALL NONE A-30 A-360 ALL ALL ALL

REQUIRES ACTION AUTHORIZED

PRINT TO EXCEL CLOSE

GREEN - GOOD TO GO

YELLOW - REQUIRES ACTION

BLUE

A-8 SIDS DELIVERED

A-9 DATE - COMMUNITY REVIEW

A-13

P-PLANNED (CONFIRMED)


J-UNCONFIRMED PLANNED ALTERATION

G-INSTALLED

NOT BUILT

SUBMIT CANCEL

FIG. 14

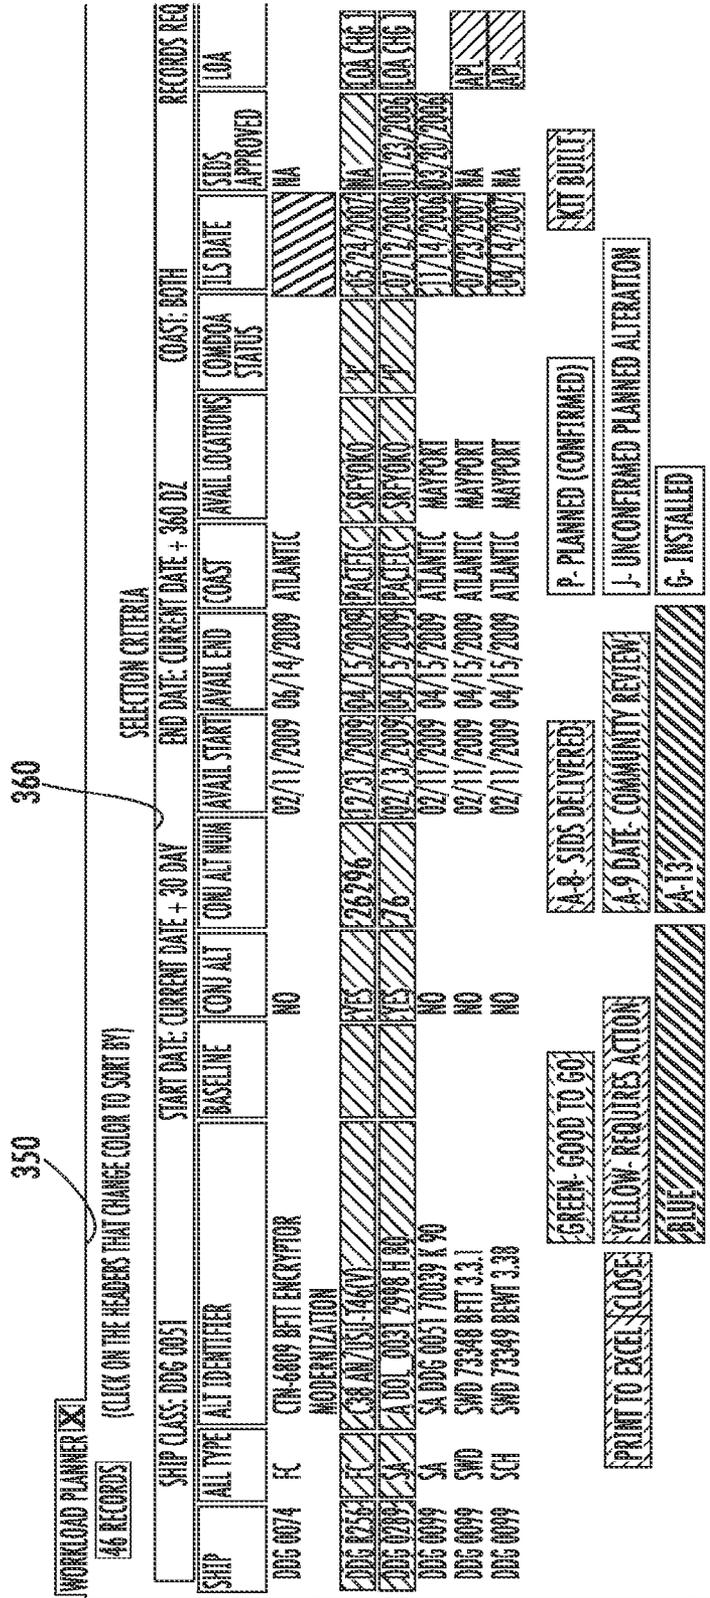

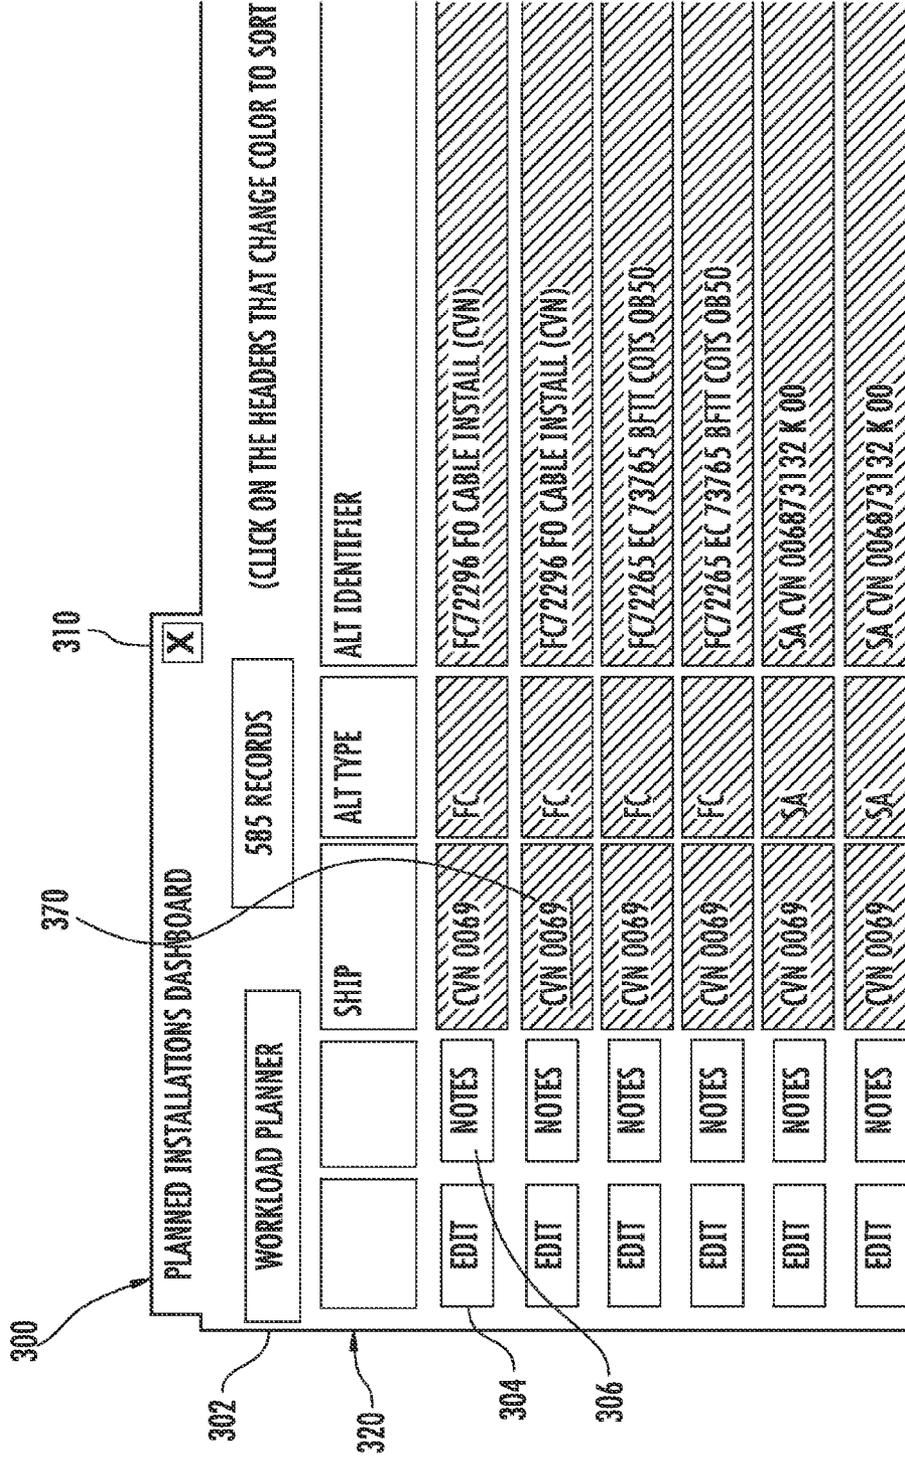


FIG. 16

400

222 DOCUMENTS CHOOSE A DOCUMENT

220 REPORTS AVAIL PLANNING

224 INSTALLATIONS

226 MAINTENANCE CHOOSE MAINTENANCE AREA

228 ADMINISTRATION CHOOSE ADMINISTRATION AREA

402 SELECT SHIP CLASS: [DDC 005] [SUBMIT]

404

FOLLOWING IS A LIST OF ABBREVIATIONS USED THROUGHOUT THE AVAILABILITY PLANNING SPREADSHEET

SHIP INSTALLATION DRAWING STATUS

- C- COMPLETE
- E- NOT COMPLETE/NOT APPROVED
- N/A- NOT APPLICABLE

APPLICABILITY STATUS CODE COLUMN ABBREVIATIONS

- A- APPLICABLE, NOT AUTHORIZED
- B- APPLICABLE AND AUTHORIZED (PROGRAMMED)
- C- COMPLETED
- E- INTENT EQUIVALENT ACCOMPLISHED
- P- PARTIALLY COMPLETE
- R- REPORTED COMP (ILS NOT VERIFIED)
- X- CANCELLED

CS1 B/L COLUMN ABBREVIATIONS

- B- BASELINED
- C- COMPLETE (INSTALLED)
- N- NOT ON BASELINE
- D- DELETED FROM BASELINE
- P- BASELINE PMA
- R- RISK FROM SUBMITTED
- N/A- NOT APPLICABLE

MATERIAL STATUS

- G (GREEN) IF MATERIAL STATUS IS YELLOW OR RED
- Y (YELLOW) COMMENTS REFLECTING THIS STATUS
- R (RED) WILL BE IN THE NOTES COLUMN

ILS CERTIFICATION STATUS CODES

- NR- NOT REQUIRED
- NC- NOT CERTIFIED
- XA- RETURN TO PRIOR APPROVER
- CR- CERTIFIED
- UD- UNDER DEVELOPMENT
- WA- ILS RISK ASSESSMENT APPROVED

FIG. 17

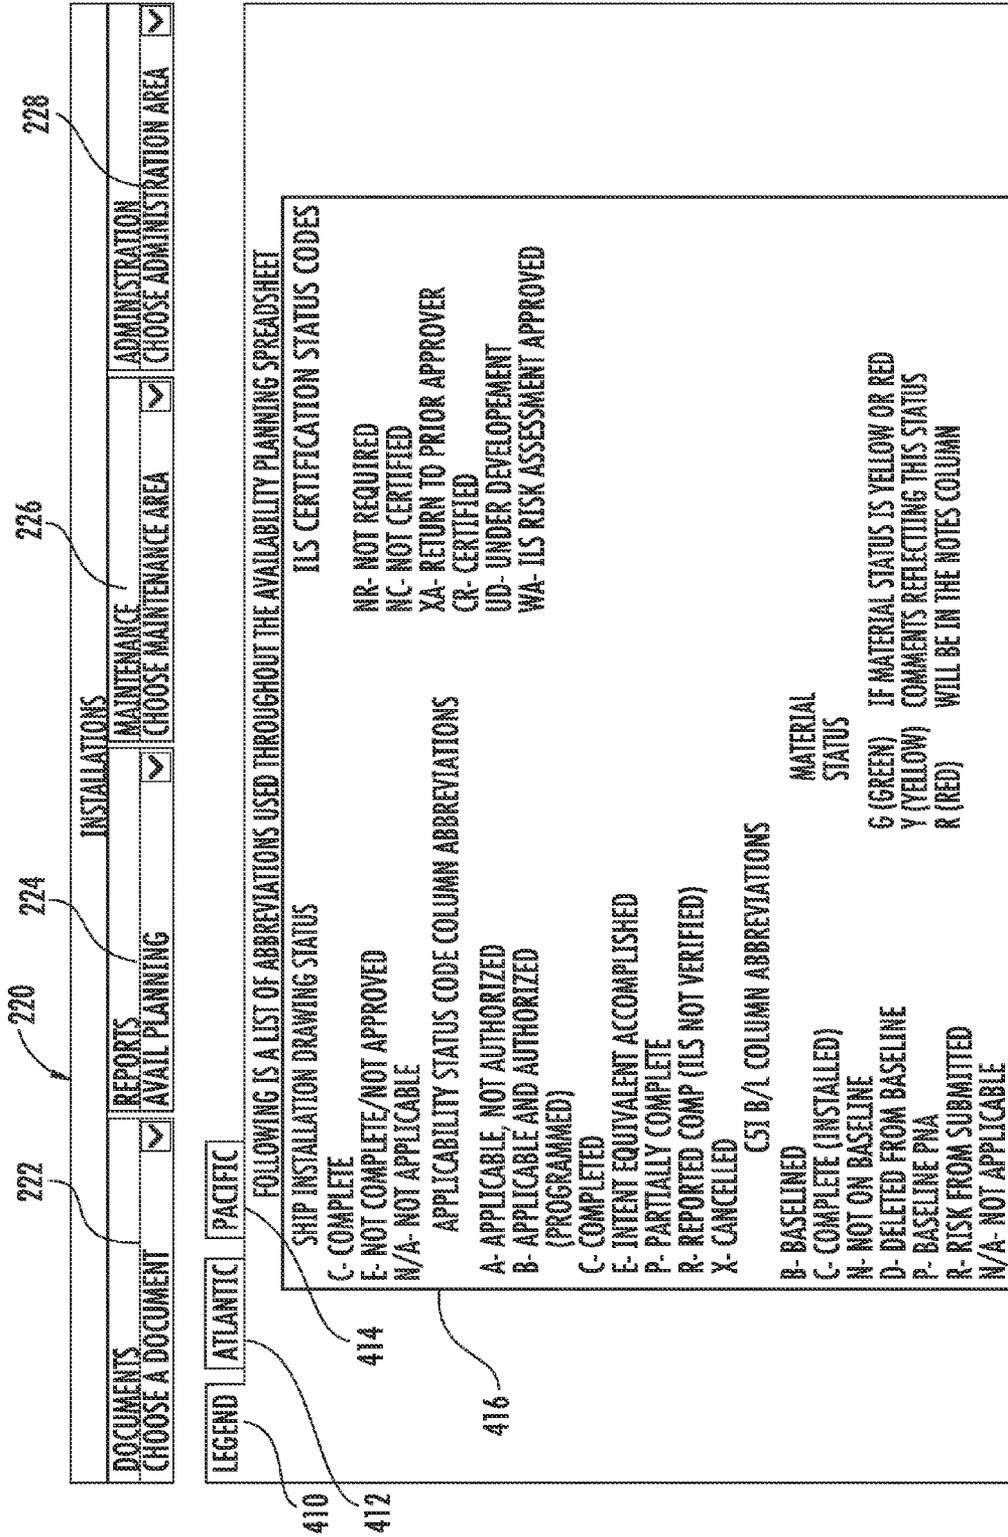


FIG. 18

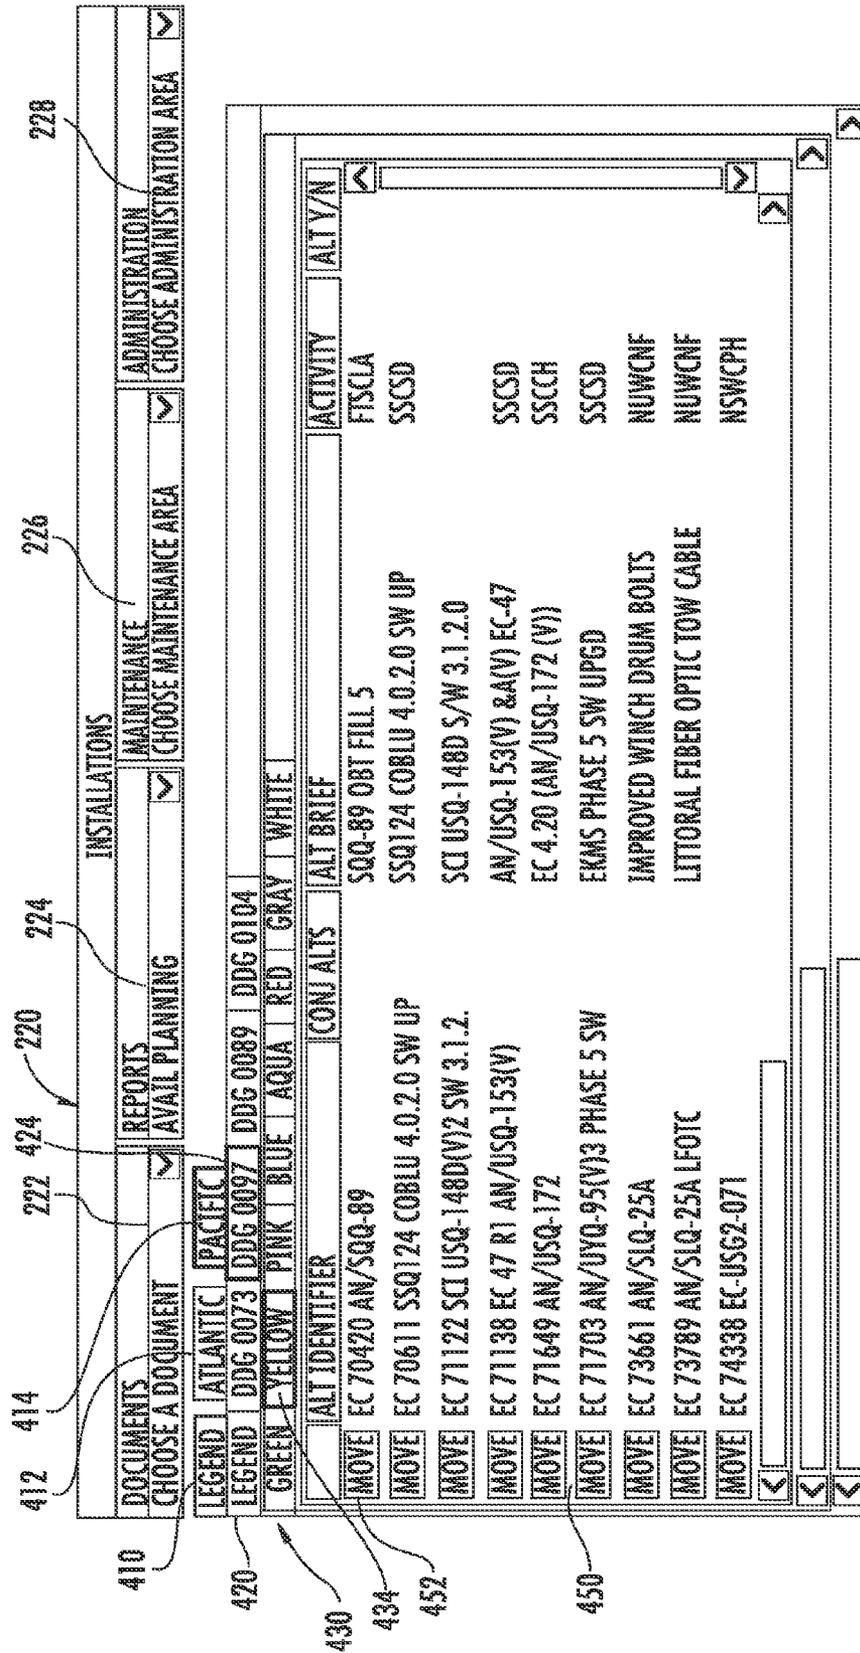


FIG. 19

412 414 222 424 220 224 226 228

410 DOCUMENTS CHOOSE A DOCUMENT 434 REPORTS AVAIL PLANNING 434 MAINTENANCE CHOOSE MAINTENANCE AREA 434 ADMINISTRATION CHOOSE ADMINISTRATION AREA

420 LEGEND ATLANTIC PACIFIC DDG 0073 DDG 0097 DDG 0089 DDG 0104
 GREEN - YELLOW PINK BLUE AQUA RED GRAY WHITE

430 ALT IDENTIFIER CONJ ALTS ALT BRIEF ACTIVITY ALT Y/N

434 AVAIL PLANNING DEFER FORM

452 YOU HAVE DECIDED TO MOVE THIS RECORD TO ONE OF THE FOLLOWING ZONES.
 PLEASE FILL IN THE REASON FOR THE MOVE.

450 ZONE TO BE MOVED TO
 GREEN: ○ YELLOW: ○ BLUE: ○ AQUA: ○ GRAY: ○ WHITE: ○

454 SHIP: DDG 0097 ALT IDENTIFIER: EC 70420 AN/500-89
 AVAILABILITY START: 07/23/2008 AVAILABILITY END: 10/24/2008

REASON FOR THE MOVE:

MOVE SUBMIT RESET CANCEL

FIG. 20

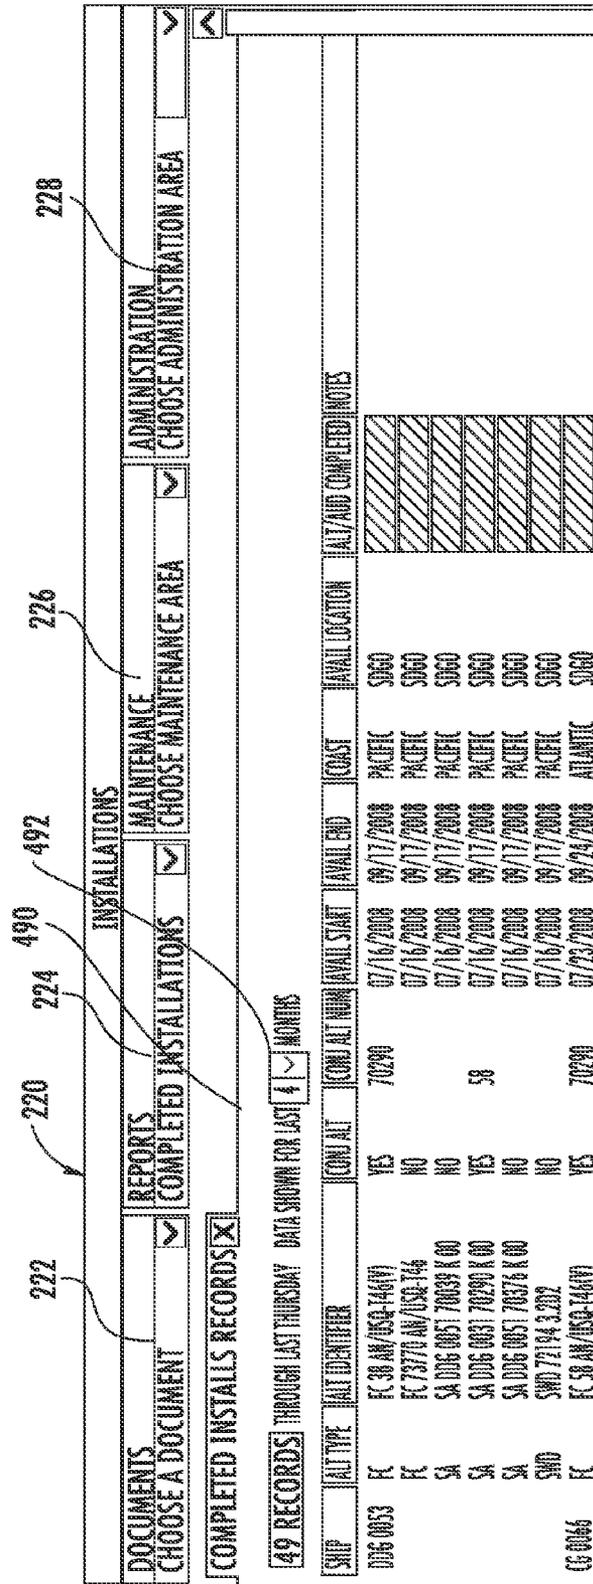


FIG. 21

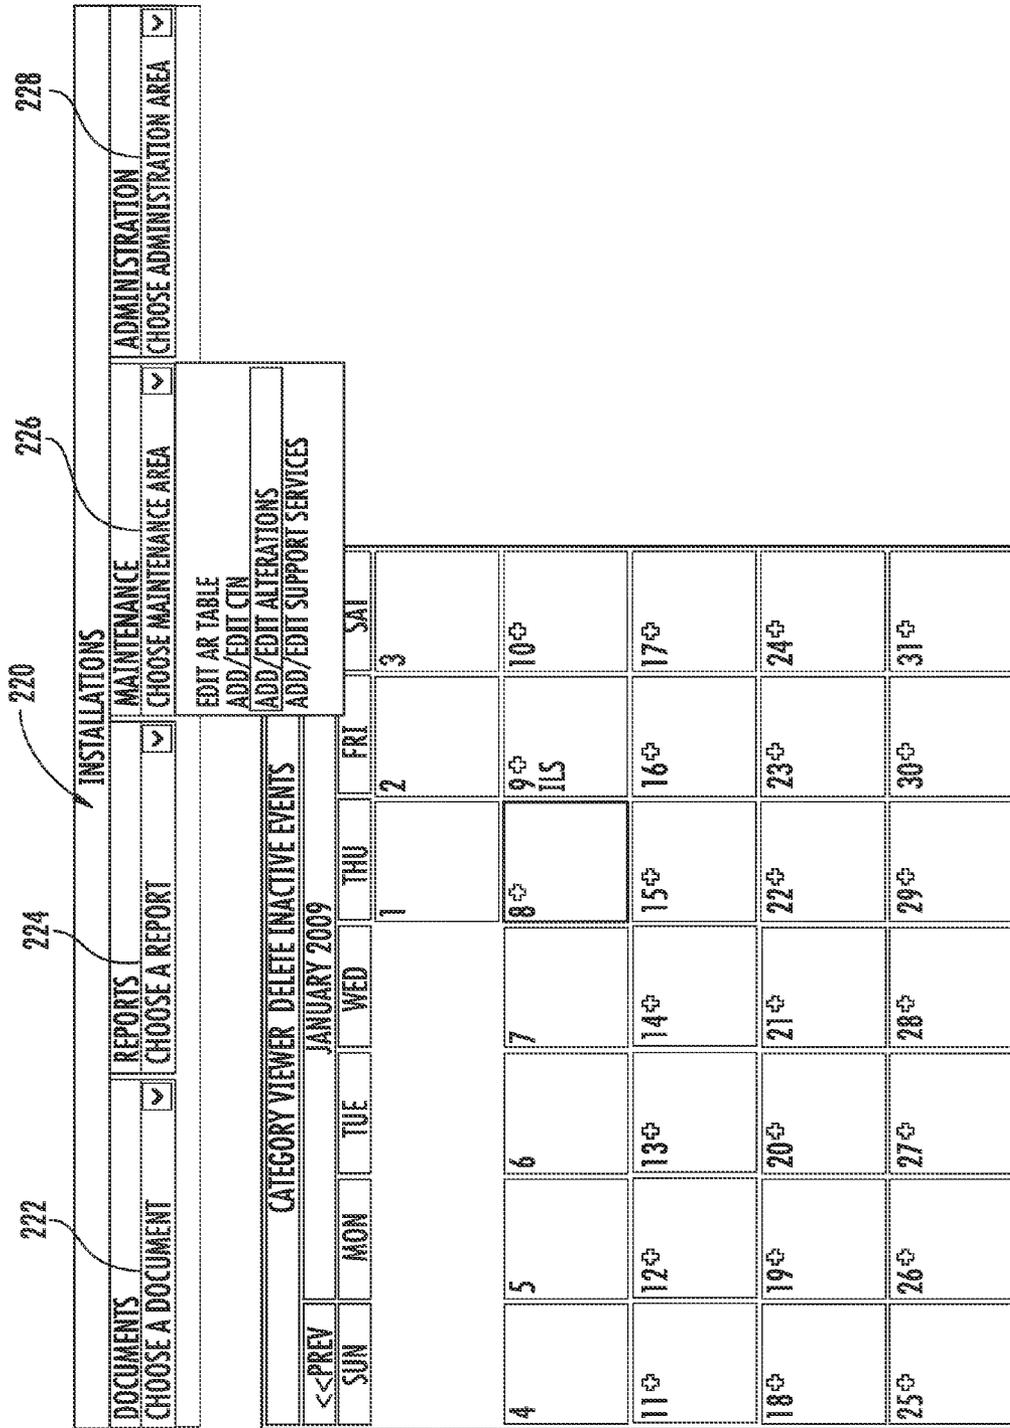


FIG. 22

500 220 510 224 222 226 228

DOCUMENTS CHOOSE A DOCUMENT

REPORTS CHOOSE A REPORT

INSTALLATIONS

MAINTENANCE

ADMINISTRATION CHOOSE ADMINISTRATION AREA

ALTERATION RECORDS 32 RECORDS

ADD NEW RECORD

ID ALT TYPE ALT IDENTIFIER ALT BRIEF

EDIT 1

EDIT 2

EDIT 3

EDIT 4

EDIT 5

EDIT 6

EDIT 7

EDIT 9

EDIT 10

EDIT 11

EDIT 12 SWD CTN-3045 DCMS 1.0.1 SWD

EDIT 13 SWD 73348 BFTT 3.3.1 SOFTWARE UPGRADE

CLOSE

ALT TYPE: FC

ALT IDENTIFIER: 72296

CONJ ALT: YES

ALT NUMBER:

ALT BRIEF: FIBER OPTICS CABLE INSTALLATION

SUBMIT CANCEL DELETE

CONJUNCTIVE ALTERATION YES/NO

YES

YES

NO

YES

YES

YES

NO

NO

YES

YES

NO

YES

FIG. 23

222 540 220 550 274 226 228

DOCUMENTS CHOOSE A DOCUMENT

REPORTS CHOOSE A REPORT

INSTALLATIONS MAINTENANCE CHOOSE A REPORT

ADMINISTRATION CHOOSE ADMINISTRATION AREA

248 RECORDS

SHIP	ALT TYPE	ALT IDENTIFIER	CONJ ALT NEW	CONJ ALT	CONJ ALT NUM	AVAIL START	AVAIL END	COAST	AVAIL LOCATION	ILS CERT	ILS
EDIT CG	0052	SA	CG 0047	70039	K 00	NO	02/13/2008	02/11/2009	PACIFIC	SDGO	CERTIFIED-05/
EDIT CG											CERTIFIED-11/
EDIT CG											CERTIFIED-12/
EDIT CG											CERTIFIED-12/
EDIT CG											CERTIFIED-12/
EDIT CG											CERTIFIED-12/
EDIT LHM											CERTIFIED-09/
EDIT LHM											CERTIFIED-12/
EDIT CVM											CERTIFIED-07/
EDIT CVM											CERTIFIED-04/
EDIT CVM											CERTIFIED-03/
EDIT CVM											CERTIFIED-04/
EDIT CVM											CERTIFIED-04/
EDIT CVM											CERTIFIED-04/
EDIT DD											CERTIFIED-04/

AR EDIT FORM

SHIP: CG 0052
 AVAIL LOCATION: SDGO
 ACCOMP START DATE: 02/13/2008
 ACCOMP END DATE: 02/11/2009
 OCEAN: PACIFIC
 ALT TYPE: SA
 ALTERATION ID: SA CG 0047 70039 K 00
 CONJUNCTIVE ALTERNATION: NO
 CONJUNCTIVE ALT NUMBER:
 ILS CERT STATUS: CERTIFIED
 CERT STATUS DATE:
 ILS CERT STATUS DATE: 05/06/2008

A-18: Y A-12: A-6:
 ELEMENT CERT: WS12TPCD: SHIP CHECK: 03/22/2007
 SID APPROVAL: 07/25/2007 INSTALL KIT BUILT: INSTALL KIT SHIPPED:
 AUD/ALT COMPLETED: CONJUNCTIVE ALT NEW:
 NOTES:

SUBMIT CANCEL

CLOSE

FIG. 24

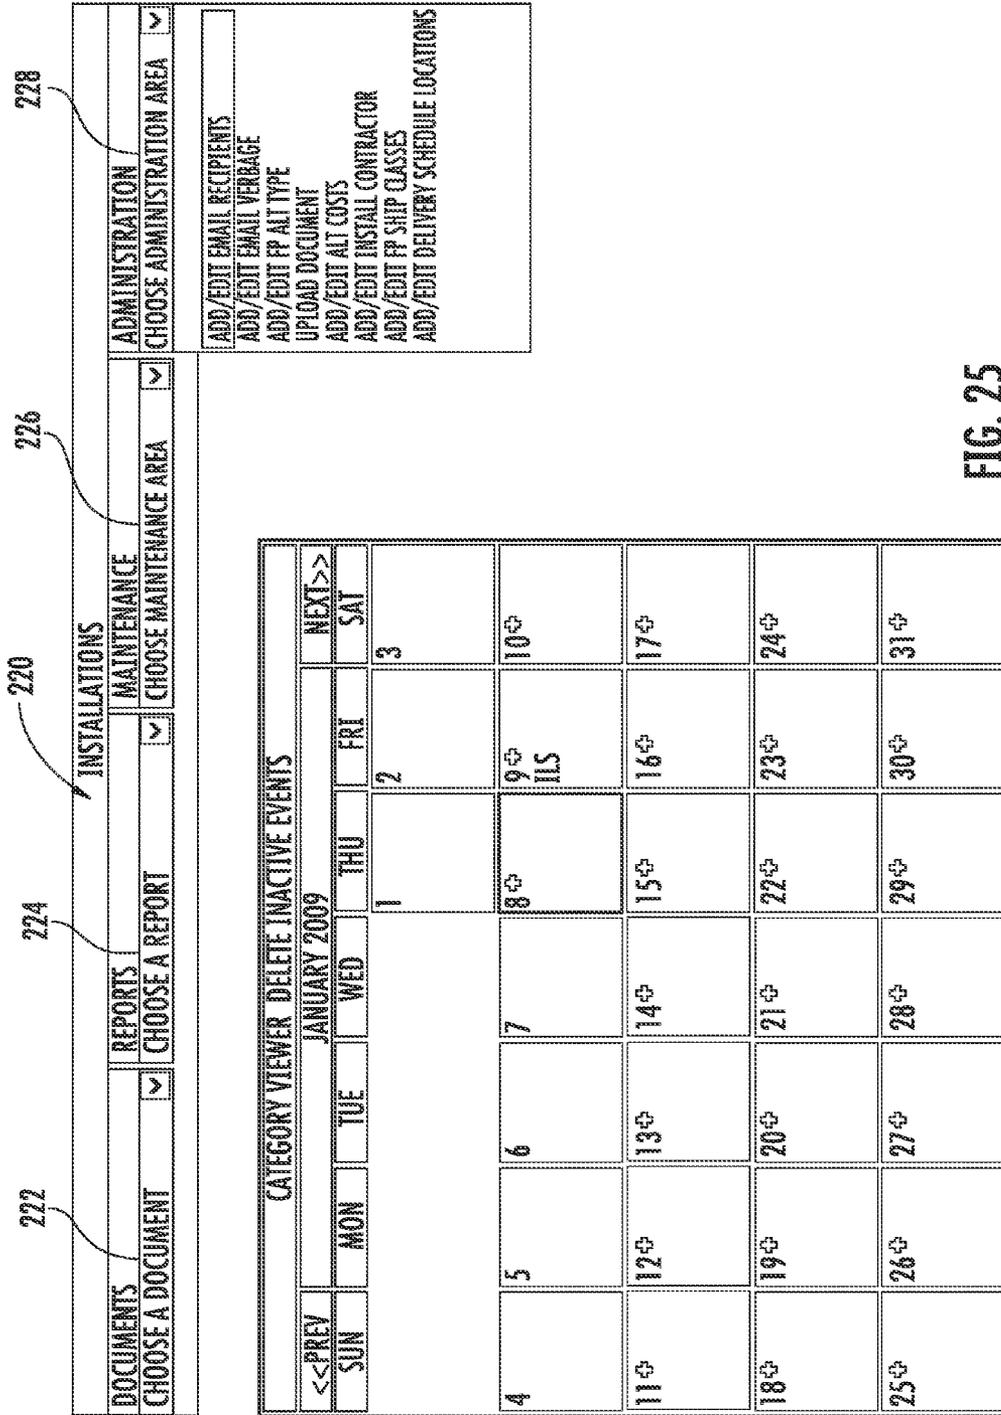


FIG. 25

The screenshot displays a software application window with a menu bar at the top containing the following items: DOCUMENTS, CHOOSE A DOCUMENT, REPORTS, CHOOSE A REPORT, INSTALLATIONS, MAINTENANCE, CHOOSE MAINTENANCE AREA, and ADMINISTRATION, ADD/EDIT EMAIL RECEIPTS. The main area contains a table of email receipt records:

EMAIL DESCRIPTION	RECIPIENT FIRST NAME	RECIPIENT LAST NAME
EMAIL REC'D	BOB	BROWN
EMAIL REC'D		DAVENPORT
EMAIL REC'D		BROWN
EMAIL REC'D		DAVENPORT
EMAIL REC'D		BROWN
EMAIL REC'D		DAVENPORT
EMAIL REC'D		JONES
EMAIL REC'D		O'BRIAN
EMAIL REC'D		JONES

A modal dialog box titled "EMAIL RECEIPT ADD/EDIT FORM" is open, containing the following fields and controls:

- VERBAGE: ILS CERT ACTION REQUIRED
- DESCRIPTION: ILS CERT ACTION REQUIRED
- RECIPIENT: DENISE SMITH
- Buttons: SUBMIT, CANCEL, DELETE

At the bottom of the dialog, a list of recipients is shown: STEVE, DENISE, STEVE. A "CLOSE" button is located at the bottom right of the main application window.

FIG. 26

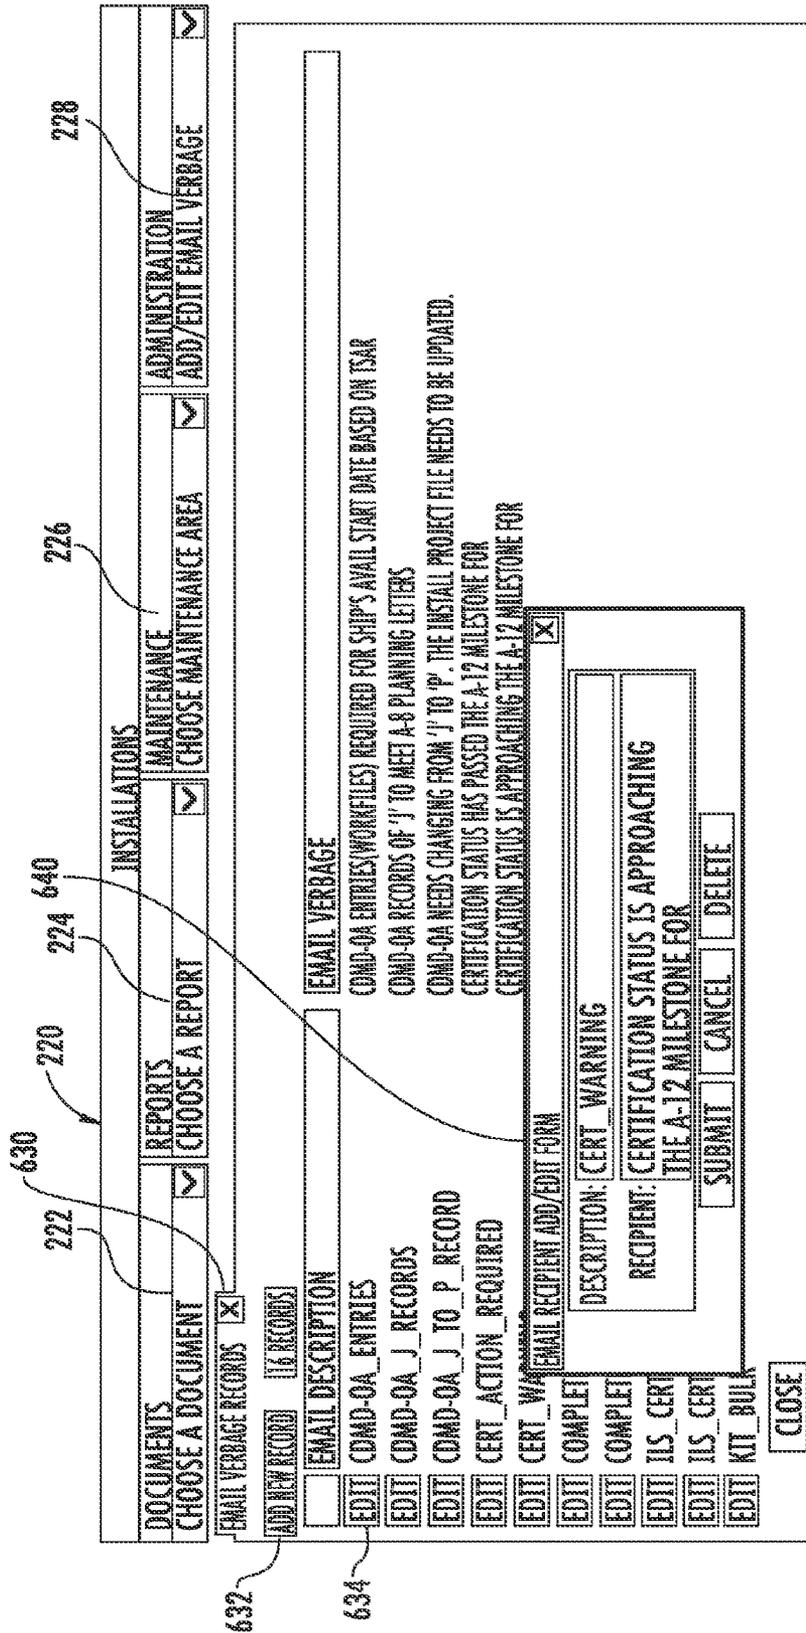


FIG. 27

1

PROJECT MANAGEMENT SYSTEM AND METHOD

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

The invention described herein includes contributions by one or more employees of the Department of the Navy made in performance of official duties and may be manufactured, used, licensed by or for the United States Government for any governmental purpose without payment of any royalties thereon.

FIELD OF THE INVENTION

Generally, the invention relates to a method and a system for managing projects. In particular, the invention includes a method and system for performing project tasks promptly based on the display of alert indicia.

BACKGROUND

A project is a set of tasks that use resources (money, people, materials, energy, space, provisions) to achieve project objectives. Project management is the function of organizing and managing resources to bring about the successful completion of project objectives. Projects include start, due and completion dates related to the tasks. Project tasks and milestones may be scheduled dynamically based on their timing relationships. For example, each task may have a preceding and succeeding task, wherein the completion of one task sets the start of the succeeding task, and the project is completed when all of the tasks are complete. A number of software programs, such as Microsoft Project, FastTrack Schedule, and Primavera, may be used to generate Gantt and PERT charts of projects. Tasks are related to requirements which may be hard and soft requirements. Hard requirements include, for example, provision of parts and equipment. Soft requirements include, for example, receiving approvals to proceed to a new project phase.

Inventories may be managed using software and databases. Inventories include physical parts which are stocked to maintain minimum stock quantities and which are ordered to satisfy minimum order quantities. In other words, inventory levels are maintained to balance carrying costs, ordering or shipping costs, and risks associated with the unavailability of parts. From a project management perspective, inventories or stock may be used to fulfill hard requirements.

The above-mentioned software programs and systems are operable to manage supply chains and inventories. Improvements are needed, however, in the systems and methods of managing multiple projects simultaneously. In many aggregate project management situations, there is no continuous demand or supply chain and the principal focus is not inventories or cost but, rather, maximizing the availability of assets.

SUMMARY

A project management system and method are disclosed herein. The method may be performed, at least partially, by the project management system. The project management system comprises a computing system having a computer readable medium and a first, second, third, fourth and fifth processing sequences embodied in the computer readable medium. The first processing sequence is operable to provide a user interface to display a plurality of alert indicia corresponding to a plurality of alert status. The alert status corre-

2

spond to a plurality of requirements. The plurality of requirements correspond to a plurality of projects and include at least one of complete and incomplete requirements. The plurality of alert indicia represent the plurality of alert status. The second processing sequence is operable to convert an incomplete requirement to a complete requirement upon completion of a task corresponding to the incomplete requirement. The third processing sequence is operable to determine the alert status of the requirements of the plurality of projects based on a time difference between a current date and a target date corresponding to each requirement. The fourth processing sequence is operable to select a first project from the plurality of projects, select a project alert status, and override the alert status of incomplete requirements of the first project based on the project alert status selected. The fifth processing sequence is operable to select a first incomplete requirement of the first project, select a first requirement alert status, and override the alert status of the first incomplete requirement based on the first requirement alert status selected.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other disclosed features, and the manner of attaining them, will become more apparent and will be better understood by reference to the following description of disclosed embodiments taken in conjunction with the accompanying drawings, wherein:

FIG. 1 is a block diagram of an exemplary computing system coupled to a network and showing exemplary software modules including modules for executing sequential and event-driven processes;

FIG. 2 is a block diagram of an exemplary algorithm for executing a sequential approval process;

FIG. 3 is a block diagram of an embodiment of a module for configuring the sequential process of FIG. 2;

FIGS. 4 and 5 are exemplary data structures used by the algorithm of FIGS. 2 and 3;

FIG. 6 is a block diagram of an exemplary algorithm for executing an event-driven approval process;

FIGS. 7 and 8 are exemplary data structures used by the algorithm of FIG. 6;

FIG. 9 is a block diagram illustrating a method performed in the computing system of FIG. 1 with sequential and event-driven project management algorithms;

FIG. 10 is a conceptual diagram of a dashboard resulting from the execution of the system of FIG. 1;

FIGS. 11-12 are screen shots of an exemplary GUI;

FIGS. 13-16 are screen shots of the exemplary GUI of FIG. 11 illustrating a planned installations dashboard and a workload planner;

FIGS. 17-20 are screen shots of the exemplary GUI of FIG. 11 illustrating an availability planning report;

FIG. 21 is a screen shot of a completed installations report;

FIGS. 22-24 are screen shots of the exemplary GUI of FIG. 11 illustrating maintenance area editing dialogs; and

FIGS. 25-27 are screen shots of the exemplary GUI of FIG. 11 illustrating administration editing dialogs.

DETAILED DESCRIPTION

A project management method and system are described herein. The system includes a computing system and programs to acquire and manipulate project data. The project data is presented to a user for manipulation with a graphical user interface (GUI) with which the user can, at a glance, sense the status of requirements of a plurality of projects based on alert indicia, e.g. color coding schemes. The status

of the requirements is determined by rules applied to project data. The user may drill down into a project using the GUI, select a group of projects related to a facility based on a status category, auto-initiate material movement forms, interface to a budgeting process, and provide timely notification of upcoming events and requirements via standard messaging processes.

Projects generally represent installations to be performed in relation to a facility. Projects comprise process requirements and installation requirements. Installation requirements are the designs, features, equipment, documentation, and other requirements which are used in the performance of the project. Process requirements are the documentation, approvals, releases, certifications and other requirements necessary to initiate or release performance of a project. An aggregate project management system may have defined process requirements even though the installation requirements may vary significantly between projects.

A facility may comprise a building such as a manufacturing plant, a vehicle such as a plane, truck, and the like, and an information system such as a printer, copier, computer, and the like. A group of like-facilities is referred to herein as a facilities group and a facilities group composed of transportation facilities is referred to herein as a fleet. Aggregate project management may concern the management of multiple projects in a single facility or in a fleet or in a facilities group such as a manufacturing system comprising multiple manufacturing plants or an asset lease program. Aggregate project management may also involve management of product development pipelines and technology/product platforms in a stage-gate process.

A facility, or similar resource, has available time and unavailable time. Some tasks may be performed during available time, but other tasks must be performed on the facility during unavailable time, for example to install equipment, upgrade software, maintain facility systems, train individuals on the use of upgraded software and systems, and so on. To maximize available time, or productivity, of the facility, a plurality of project tasks are managed in aggregate. Available time may comprise one or more discrete time periods. For example, an ecommerce business may have available time each day between 0-2 a.m. Data including XML code and product images may be fed to servers during that time. Before releasing the feed, however, the images must be produced, the XML code programmed, and web pages produced by the code tested to ensure they display images correctly. The release process may include a number of process steps such as image release, code release, page testing etc. The pages may vary, but the release process is constant to ensure that new pages may be uploaded periodically without impacting the ability of web users to purchase products. Multiple releases may be performed in multiple servers, each configured differently, thereby constituting different facilities.

The availability of facilities depends on business or other objectives. One exemplary objective is to maximize available time of the most productive facilities. Another is to maximize available time of critical facilities. A third exemplary objective is to maximize the aggregate availability of a fleet. In one embodiment, the availability of facilities is provided to the system and cannot be changed by the system. Object movements, e.g. materials, code, images, etc., may be tracked by an inventory module and material transfer documents which facilitate data input into the module indicating material ownership, location, availability and so on.

Projects may be developed in a planning process concerning a facility or facilities group or may be the outcome of a revitalization and maintenance plan, referred to herein as a

modernization plan. A modernization plan generates installations for like-facilities based on an expected life-expectancy of equipment and systems already installed in the facility. A modernization plan may also be based on software upgrades to fix bugs, for example. In the software example, the modernization plan would identify all buggy software installations for upgrade. In the life-expectancy case, the plan might identify for upgrade all facilities having a part in service for longer than a predetermined time related to its expected useful life. A modernization plan may further categorize components or assets of facilities in asset classes.

Project data includes installation requirements data, process requirements data, inventory data and facilities data. The terms "include" and "comprise," and synonyms and derivatives thereof, are open transition terms used throughout this disclosure to exemplify objects without in any way limiting the number of additional objects which may be included. Installation requirements data may include a description of the requirements, a category label of a category related or associated with such a requirement, and other types of data. Process requirements data includes process requirements predetermined according to defined process steps. Different processes may be configured having different steps and step criteria. Rules stored in a system memory define the criteria.

The system has a number of programs for generating reports, producing graphical displays, receiving user inputs using graphical user interfaces including dashboards, and generally facilitating project management. FIG. 1 is a block diagram of an exemplary computing system embodiment. The system, referred to by numeral 10, includes memory 12 comprising installations module 14 for editing and presenting project data in documents, reports and dashboards, logistics module 16 for planning material and document movement, inventory module 18 for producing material transfer reports and managing materials, and data store 20 containing project data. Module 14 is an event-driven module in which the events may or may not be sequential. Modules 16 and 18 utilize sequential approval processes to authorize material and logistical events. Computing system 10 communicates with network 60 which may be operably coupled to one or more data sources, exemplified as source data 62, for acquiring project data, and to computer 64 having client program 66 which may be a browser. The browser may present in a display of computer 64 web pages pushed by system 10. Alternatively, system 10 may transfer data for generating a user interface without a browser. Additional components of system 10 include processor 30 which controls the performance of program modules 14, 16 and 18, data input/output I/O 40 and display 50 which presents project data as described further below.

Approval process data such as project, item, and installation data may be obtained from a plurality of sources. Data may be obtained over a network which may include the internet, may be downloaded from a connected system, and some data may be input by a system operator/user. The plurality of sources may be controlled by different entities, and the data contained therein may change frequently. A data structure may be created based on the structure of the data sources which may be comma or tab delimited, SQL and the like. After creation, data is uploaded to the database. Uploading may be through the internet using any program capable to upload files. An exemplary program is the COLD FUSION™ program distributed by ADOBE™ Systems Incorporated. Project data is processed, for example using Sequel Integration Services, to populate the database. COLD FUSION™ program reports and menus are then generated from which Dynamic Cold Fusion Language Markup pages are created.

The pages are pushed by system **10** to client machine **64** when a user accesses system **10**. Source data may be conditioned to conform multiple source structures and data scope into a common structure and scope. In one embodiment, the planning horizon is limited to a number of years, e.g. 5 years, and source data dated beyond the planning horizon is excluded. In some embodiments, selected fields are parsed and data is excluded if the field does not contain a particular text string or contains a specific text string. In other embodiments, data from multiple fields is combined to form unique identifiers. Date criteria may filter out installations which cannot be completed within a predetermined timeframe. For example, an installation may be filtered out when the target date for accomplishing a task is greater than or equal to the value of the present date minus 12 months. Type criteria may filter out projects which may be performed during unavailable time, e.g. audits (“AUD”). Status criteria may filter out installations based on a status code. For example, installations with an alteration type equal to “A” or “B” may be presented while installations with other status values may be filtered out.

FIG. **2** is a flowchart of a sequential approval process executable by a module and FIG. **3** is an embodiment of a module for enabling the sequential approval process of FIG. **2**. Exemplary data structures **134** and **136** used by the algorithms of FIGS. **2** and **3** are shown in FIGS. **4** and **5**. Data structure **134** includes a plurality of fields for configuring the approval process sequence including messaging information. Data structure **136** maintains approval dates for each sequential approval for each item. Generally, the sequential approval process comprises several steps for managing the timeliness by which approvals for items are performed. The process prompts pipe approvals based on a group selection. Different groups have different approval processes comprising different approval pipes, each pipe comprising at least one departmental or functional approval, e.g. quality, accounting, engineering, marketing, finance, and the like. Groups may be sub-classified to provide additional flexibility. Modules receive and store item, group and approval information. Initially, an originator enters item information and a group is associated with the item based on the originator. Group contacts corresponding to approval pipes then give pipe approvals in sequence until all approvals are obtained. Modules may store the item information as project data or separately in an item database which also contains fields storing approval pipes and pipe approvals. The sequential process may also be used as a stand-alone process for other purposes. Items may be materials, shipping requirements, and any other tangible and intangible items. Once an item is configured as described with reference to FIG. **3**, the approval process prompts contacts to approve pipes. An item is approved when the last pipe in the sequential process is approved. The outcome of the approval process may be an approval document, a tag in an approval field showing approval of the item, and the like.

A module such as module **16** or **18** provides a GUI where, at **76**, a contact (user) logs in and inputs an item ID. A submodule, referenced by numeral **80**, receives the item ID at **82** and at **84** selects a next unapproved approval pipe from a group of sequentially ordered approval pipes related to the item, the next unapproved approval pipe being the first unapproved approval pipe in the group of sequentially ordered approval pipes. At **78**, the GUI then enables the contact to enter a pipe approval. If the contact is configured to enable multiple pipes, the GUI may present the necessary objects to enable the contact to do so. At **86** submodule **80** receives a pipe approval from the pipe contact and, upon receipt of the pipe approval, converts the next unapproved approval pipe into an approved approval pipe, for example by inserting an

APPROVAL DATE in data structure **136** for the item selected by the user at **76**. Then, at **88**, submodule **80** searches data structure **136**, shown in FIG. **6**, and determines whether the last approval has been received, for example by looking at the APPROVAL DATE fields. In alternative embodiments an approved status field may be used instead to track pipe approvals. If it has, then at **90** submodule **80** notifies the originator by sending a message which can be any type of information conveying mechanism such as email, voicemail, fax, text-message, and the like. If it has not, then submodule **80** finds the next unapproved pipe and, at **90**, sends a message to the contact for the unapproved pipe. At **92**, the contact may receive the message sent at **90** which may prompt approval. Thus, in the first pass-through, submodule **80** will select the pipe contact for the first approval pipe in the order and in the last pass-through submodule **80** will select the item originator. At **94**, the originator may receive the message sent at **90** indicating final approval. Upon receiving the final approval, the originator may perform any number of optional actions such as printing a record of the approval, uploading or linking the item to other processes and so on. In exemplary embodiments, final approval of a material item enables sequential processes for shipping the item and for updating inventories.

The sequential process has to be configured for each group, and groups have to be related to contacts, before submodule **80** may function. FIG. **3** is a block diagram of an embodiment of a module for executing the sequential process of FIG. **2** illustrating additional processing sequences for configuring the sequential process for each item, configuring groups and messages, and providing a GUI with which users can input information. Configuration may be performed with a GUI providing a form in which all the enabled selection fields are provided, or each enabled selection field can be provided sequentially. If provided sequentially, a user may set the approval order based on the selection sequence. Otherwise, a PIPE ORDER field may be provided. Block **98** represents a plurality of processing sequences for relating approval pipes to a group identifier. A group is input at **100** after which approval pipes are input or selected at **102**, contacts for each pipe are input or selected at **104**, and at **106** the group and pipe information is stored in data structure **134**. The sequence repeats until all pipes in a group are entered to form a group of a plurality of approval pipes. Not shown are lists of groups and pipes which are used to populate GUI drop-down lists or checklists. Groups and pipes in the lists may be enabled or disabled from time to time to limit their use. A pipe contact may be defined as a pipe contact for multiple pipes and groups or may be limited to a specific group or a specific pipe. The functionality described above provides significant flexibility in the design of approval processes based the association of generally standard organizational and employee or agent information.

At **112** a new item record is created which is related to a group ID at **114**. The new item record is created in a data structure (not shown) for storing details pertaining to the item. The item receives a unique item ID if it is a new item or, otherwise, the user selects an existing item to populate the record with item details. Item data is received at **116** and stored in the item record. Item data includes relevant item information which depends on the kind of item. A material item may include information such as owner, serial number, version, production date, weight, cost, kit number and so on. A logistics item may include shipping and receiving destination and date information, tracking number, item number of the item shipped, and so on. Any kind of item may be defined and approved using the sequential process.

Approval records are created at **118** in data structure **136** corresponding to each approval pipe selected at **102**. Upon configuration, submodule **80** performs the approval steps described with reference to FIG. **2**. At **126**, the originator may create a document reflecting the approvals of the item which may include pipe approval dates and contacts, for example. In one embodiment of a process executed by module **14**, the user may then upload at **128** the approval document created at **126** and, at **130**, module **14** or another module may record the upload date as the date in which the item was approved. Such approval may constitute an event of the event-driven approval process described in FIG. **9**.

FIG. **6** illustrates an algorithm for executing an event-driven process. Exemplary data structures **170** and **172**, used by the algorithm of FIG. **6**, are shown in FIGS. **7** and **8**. Data structure **170** includes a plurality of fields for configuring the approval process including messaging information. Data structure **172** maintains approval dates for each approval step. The process comprises several steps for managing the timeliness by which approvals necessary to fulfill requirements are performed. Requirements may be process steps, items, tasks, and the like. In this exemplary embodiment, a module such as module **14** provides a GUI where, at **140**, a user provides input relating to installations. As described above, installations are projects having tasks performed at a facility which has availability constraints. The tasks relate to process requirements and alert indicia illustrate the alert status of each requirement to illustrate the overall status of a plurality of projects. As in FIG. **3**, module **14** receives information from the user concerning various requirements which must be fulfilled in the event-driven process including contact and messaging information for each person responsible for approving a requirement of the approval process. Said information is stored in data structure **170** and installation data is stored in data structure **172**. The information is linked based on the INSTALL ID which is unique to each installation therefore projects are thus linked to facilities information. Data structure **172** includes fields for ASSET CLASS, facility (asset) AVAIL DATE, installation START and COMPLETION DATE, e.g. a window where installations are permitted, CONJUNCTIVE ALTERations and LOCATION. Conjunctive alteration information may also include the alteration ID of the conjunctive alteration and other information for coordinating installation of the conjunctive alterations. Asset classes are provided to coordinate deployment of upgrades across asset classes. Location is provided to define where the asset will be located during the availability period.

At **144** new records are added for new installations in data structure **170**. As stated previously, installation information and approval process information is also known as project information. In the embodiment shown, rules (described below) are embedded in code for efficiency and are applied to all installations in the same manner, which presumes that all installations follow the same approval process (including override options). In an alternative embodiment, installations may be sub-classified based on asset class or other dimension, and each dimension may have its own set of rules which may be provided in data structure **170** as requirement rules. This would provide a more dynamic and flexible system. Installations data may be sourced externally and periodically, e.g. daily, from data source **62** to reflect changing business or mission needs.

At **146**, module **14** determines the alert status of the requirements of the plurality of projects based on a time difference between a current date and a target date corresponding to each requirement. At **147**, a processing sequence of module **14** enables a user to select a first project from the

plurality of projects and to select a project alert status. Based on the selections, module **14** overrides the alert status of incomplete requirements of the first project based on the project alert status selected. The override may be implemented by toggling a status field such as the ILS_Color indicator field. Module **14** may evaluate the indicator fields first and, if set, may ignore the time-based calculation since the result is overridden by the status of the indicator field. At **148**, module **14** enables a user to select a first incomplete requirement of the first project, select a first requirement alert status, and override the alert status of the first incomplete requirement based on the first requirement alert status selected. The override is implemented as described with reference to the processing sequence described in step **147**. Users may approve requirements in a plurality of event types. Block **158** illustrates some of the event types which, upon completion of the event, cause, at step **166**, conversion of the incomplete requirement into a complete requirement. The event types include completing a sequential process related to an item at **160**, uploading documents at **161**, and setting approval dates of requirements at **162**.

Based on the alert status of each requirement, a message and contact may be selected at **150** and sent at **154**. In one embodiment, messages are not sent to contacts of approved requirements or contacts of requirements not yet having an alert status of sufficient importance. For example, if a requirement must be fulfilled between 60 and 90 days from a target date, and, based on the current date, the process is at 80 days from the target date, no message would be required. A message may be sent at 75 days to prompt action before the deadline, a more urgent message may be sent at 60 days indicating a bottleneck occurred by the failure to approve, and an even more urgent message may be sent at 45 days, and so on. The alert level field may also comprise subcategories within each alert level with corresponding messages so that a first message at a given alert level is sent followed by a second message at some predefined time interval, e.g. fifteen days, raising the urgency or tone of the message and so on. The predefined time interval is selected to be a fraction of the time permitted before the alert level raises to the next level. While the event-driven approval process may be sequential due to selected timing rules, it may also be non-sequential in that requirements are not necessarily (but could be) related in predecessor/successor relationships.

Data structure **170** allows each requirement to have a plurality of messages and contacts based on the desired number of alerts. The contact may receive the message, e.g. email, at **156** which may prompt a response at **158**. Inputs and responses are received at **164** by a GUI including an installations dashboard described in detail further below. The GUI presents alert indicia representing the alert status of project requirements. Upon receipt of approval input, the approval date may be stored at **166** to register that the requirement is complete. The installations dashboard may be used to modify project data. The dashboard may facilitate drill-down into secondary, e.g. sequential, processes to identify bottlenecks.

FIG. **9** is a block diagram of an algorithm having processing sequences for executing a process which combines the event-driven and sequential approval processes. The algorithm may include the algorithms described with reference to FIGS. **2**, **3** and **6** described above. At **196**, items and installations are configured. Configuration entails defining pipes approvals and contacts, items, installations and other data as previously described with reference to FIGS. **2-8**. Source data is received at **190** and at **192** a user may, optionally, select installation subsets using, for example, workload planner dashboards as described below. At **194**, a user may produce a

plurality of reports based on the configuration data. After the system is configured, at **146**, **147** and **148** the alert status for each event-driven requirement is computed. At **164** an alert dashboard is presented such as the one described with reference to FIG. **10**. Upon sensing the alert status of requirements for each of a plurality of installations, an authorized user may override alert status by setting alert indicators to selected alert levels. The alert indicator data is stored in a data structure containing requirement approvals data, exemplified as data structure **170**. At **160**, **162**, event-driven process requirement approvals may be obtained in the manner described previously with reference to FIGS. **2-8**, and the approval dates stored in data structure **170**. Blocks **94a** and **80a**, and at **94b** and **80b**, illustrate processing steps performed by submodules **80** and **94** for group **1** and group **2** items. The final approval of each of the items are stored in an approvals database, for example a database comprising data structure **136**. In one embodiment, the item approvals may automatically flow into data structure **170**. Alternatively, a user may upload an authorization document related to an item to fulfill an event-driven requirement.

The following figures illustrate the operation of the approval processes in relation to GUI which may be used to configure the processes, obtain user inputs related to items and requirements, generate reports and provide additional functionality based on the project data. FIG. **10** is a block diagram showing a conceptual project management display and exemplary timing-based alert rules and color-coded indicia. Chart **200** shows at a glance the alert status of various event-driven process requirements exemplified in columns named installation approval **214**, facilities group approval **216**, and materials approval **218**. Alert rules **202** include three timing rules in each of three columns. The top rule reflects no alert, the middle rule generates a yellow alert, and the bottom rule generates a red alert. Project ID column **204** lists projects **1**, **2**, **3** and **4**. Availability start date column **206** shows the availability start date of facilities **A1**, **B1** and **C1**. An availability date is a target date which system **10** uses to determine alert status. Projects **3**, **4** are designated for installation in facility **C1**. Current date **208** is used to produce coded current date **210** for each project by subtracting current date **208** from the availability date ("A" in months) of the facility and expressing the difference as "A-X" where X is a number of months. Legends **212** include status alert indicators, e.g. green, yellow and red. The coded dates are compared to the alert rules to generate alert status based on facility availability which enables presentation of multiple projects in potentially multiple facilities with varying availability dates in a single display and allow a project manager to identify, at a glance, which requirements require attention.

Chart **200** also shows that installation approvals for projects **A1** and **B1** require immediate attention (red alert) while the materials requirement for project **B1** requires attention (not immediate attention). The remaining requirements do not show alerts. The alert process enables management of multiple projects at a glance, without the need to understand the technical requirements of the underlying project. Following the alert rules, project **1** is at A-4 so the installation approval requirement has a red status alert indicator because approval was not received (no date is shown) yet at A-4. Facilities group approval has a green status alert indicator because, although approval was provided on Feb. 2, 2008 (A-5), the requirement has been satisfied and it no longer represents risk of delay. The materials requirement is a requirement that responsibility for necessary materials be transferred to the installation team. No status alert indicator is necessary until A-3. Project **2** is at A-2 so the installation

approval requirement has a red status alert indicator. Facilities group approval has a green status alert indicator suggesting the requirement was satisfied but no date is provided, indicating that the automatic alert process was manually overridden. The materials requirement has not been satisfied at A-2, therefore a yellow status alert indicator is shown. All requirements for project **C1** have alert status green since they are complete, as evidenced by the completion dates. All requirements for project **C2** have alert status green even though facilities group approval and materials approval was not received. This illustrates a rule of priority which may be applied when an authorization requirement has priority over other requirements. In this example, once installation approval is complete, all of the requirements show green status.

Modules **14**, **16**, **18** and other programs described herein are not limited to implementations in specific hardware or database structures. The terms computer and computing system are used interchangeably to signify a system such as system **10** comprising a processing unit, computer-readable media, input/output devices, and programs stored in the computer-readable media operable to cause the processing unit to perform a function using the input/output devices. A program, application, or computer program is here, and generally, conceived to be a sequence of computer instructions representing steps of methods for achieving desired results. A program may include a plurality of sequences organized in one, but generally more, program files, and may comprise program modules such as modules **14**, **16** **18** which are also referred to as programs. In other words, the term "program" is not limited to a singular form or manner of grouping computer instructions. Instead, program refers to the sequences necessary to perform the program's function. The instructions are processed by a computer and require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. Programs may use data structures for both inputting information and producing the desired result.

Data structures **134**, **136**, **170** and **172** impart a physical organization on the data stored in computer memory and greatly facilitate data management. A data structure is a physical or logical relationship among data elements, designed to support specific data manipulation functions. The actual physical implementation of a data structure may take several forms, from complete individual records storing the substantive information with several key indexes for locating a particular record, to a plurality of tables inter-related by relational operations, to a matrix of cross-linked data records, to individual variables indexed directly or indirectly, to various combinations and hybrids of these general types. In particular physical devices, a database may be structured and arranged to accommodate the restrictions of the physical device but, when transferred to a general purpose computer, the database may be able to be stored in a variety of formats. Thus, while certain types of information may be described as being stored in a "database" or in a "data-structure" from a conceptual standpoint, generally such information may be electronically stored in a variety of ways with a variety of encoding techniques.

Input/output devices such as I/O **40** include display devices, printers, and user input devices. Display devices include video screens, projectors and monitors. A display device may comprise a plurality of monitors coupled to a video output card, computer or server such that each monitor displays a portion of a graphic display and together the plu-

rality of monitors display the entire graphic display. A display device may also comprise a plurality of monitors coupled to disparate video drivers which are coordinated to display an integral graphic interface. An input device may comprise a mouse, a keyboard, a software recognition system, a touch-screen, a track-ball, a hybrid device including more than one aforementioned devices, and the like.

A graphic display refers to pixel data used to present an image on an output device. Generally, an application writes images in the form of pixel data to a memory array or frame buffer and provides the frame buffer data to the output device for presentation. Raster scanning is the most common method of image transmission to an output device. The graphic display may comprise display objects having images representing the shape, color, style, and other characteristics of the object. Graphic images may also represent text. Some display objects may be activated with an input device, such as by clicking, mouse-over and the like, to cause performance of a programmed function.

System 10 may include a variety of computer-readable media. Computer-readable media can be any available media that can be accessed by the computing system and includes both volatile and non-volatile media, and removable and non-removable media. Computer-readable media may comprise computer storage media to provide storage of computer-readable instructions, software applications, data structures, program modules and other data for the computing device. For simplicity and without limiting the disclosed embodiments to any particular physical embodiment of a computer-readable media, computer-readable media is referred to herein as "memory" in singular form to represent one or more discrete physical media. Thus, memory includes a harddisk, a plurality of harddisks, a combination of a harddisks and one or more of an optical disk such as a CD or DVD, a flash-drive, and a diskette, and any other media combination. The physical embodiment of the media may comprise local components and remote components accessible through a network and/or the internet.

A computing system may operate in a network environment using logical connections to one or more remote computers. The remote computer may be a personal computer, a server, a network PC, and typically includes many or all of the elements described above. The logical connections include a local area network (LAN) and a wide area network (WAN), but also include other networks. The terms "network," "local area network," "LAN," "wide area network," or "WAN" mean two or more computers which are connected in such a manner that messages may be transmitted between them. Such network environments are commonplace in office, enterprise-wide computer networks, Intranets, and the Internet. In such computer networks, typically one or more computers operate as a "server," a computer with resources such as large storage media and communication hardware to operate peripheral devices such as printers or modems. Other computers, termed "clients" or "workstations," provide a user interface so that users of computer networks can access the network resources. The computers have at least one processor for executing machine instructions, and memory for storing instructions and other information.

Table 1 illustrates project data categories and descriptions which are displayed in various forms, reports, dashboards and GUIs.

TABLE 1

Label	Description
Alt Identifier	Alteration identifier
Alt Num	Alteration number
Alt type	Type of alteration
Avail End	Last day of facility availability
Avail Start	First day of facility availability
Avail Location	Location of the facility during the availability time
Baseline	Standard installation configuration
CDMDOA Status	Configuration status
Conj Alt	Conjunctive alteration
Ship	Name of facility
ILS Date	Integrated logistics support date
LOA	Letter of authorization
MATL Status	Material status
Region	Region where facility is located during the availability time
SIDS Approved	Installation drawings status
RMMCO Complete	Regional office status

Menus, reports and other objects may be generated by any known web page creation programs. The following descriptions may be based on nautical terms representative of a naval fleet, but the invention encompasses any type of facility and facilities group planning. Regional categories such as Atlantic and Pacific may be any category to create data subsets suitable for the organizational objectives. The term "ship" may, likewise, be substituted by terms like mfg. plant, site, facility, unit, and the like.

An exemplary installations GUI 220 is shown in FIG. 11 comprising documents menu 222, reports menu 224, maintenance menu 226, and administration menu 228. GUI 220 is pushed by installations module 14 and is structured to facilitate management of installations data. Similar GUIs are provided by logistics module 16 and inventory module 18 to manage logistics and inventory data. Calendar 230 is provided for scheduling personal calendar activities and function similarly to commonly used calendars such as MICROSOFT™ Outlook. For instance, a calendar day may be double-clicked to add an appointment scheduled for the selected day. The menu options of documents menu 222 are also shown. A user activates the menu to choose from lists of documents to present project data. Like-named submodules perform the functions listed in the menu, e.g. LOAs and Drawings. Selection of LOAs displays a selection box (not shown) to enable selection of an LOA document based on a selected installation. Likewise, specific drawings may be selected, e.g. facility, interface, installation drawings and the like.

FIG. 12 is a screen shot of installations GUI 220 illustrating options of reports menu 224. A user activates the menu to choose from lists of reports and GUIs to present, edit, add and delete project data. A reports sub-module provides interactive dashboards and spreadsheet reports that allow authorized users to track the significant dates, planning milestones and cost status for projects to be installed in selected facilities, field changes, and delivery dates. Exemplary reports include Planned Installations Dashboard, Avail Planning, Completed Installations, All Avails, Alt Costs Report and the like. In addition to dashboards and reports concerning project status, additional reports may be provided to assess the performance of the aggregate project planning system. For example, a report may be provided to describe phases of modernization programs and other programs which fund the projects to be managed by the system provided herein. In one report, there are several phases and each phase has an approval date. More than one phase may be approved in one day. The phase approval dates may be provided in the source data described

with reference to FIG. 1. While the project management system provided herein does not facilitate management of phases, the system may calculate the time between phase approvals. In doing so, the system may compare dates to determine when more than one phase was approved in a single day, and may compare the phase approval dates to the project completion dates to report on the total time required to implement projects funded by the different phases and thereby facilitate improvement of the overall funding and project management activities from funding to completion of the approval process, and then to completion of the implementation of the project.

FIG. 13 is a screen shot of an exemplary planned installations dashboard 300 including a plurality of color coded cells disposed in rows and columns providing the process approval dates and planning milestone status. Dashboards present aggregate project process requirements for at-a-glance inspection to assist an installations manager to determine where to focus resources. Dashboard data may be provided from data structures 170, 172. As in FIG. 10, rows represent projects. A number of buttons are provided to drill down into selected projects and to manipulate project data. Workload planner button 302 initiates a dialog for selecting subsets of the data shown. Edit button 304 presents a planned installations edit form which provides a synopsis of the data in the row associated with the button and the ability to edit the data. Other means for selecting a row for editing include checkboxes, numbered lists where selection of a number identifies a selected row, and the like. The dialog allows editing of text data corresponding to REQUIREMENT and installation fields which may be included in data structures 170, 172 such as baseline, ILS, SIDS approved, LOA, RMMCO complete, and other data. Each of the fields may have a corresponding REQ' APPROVAL DATE and ALERT INDICATOR containing the date when the requirement was approved as well as the selected alert indicator level. Indicators may be stored in rows corresponding to requirements in data structure 172 or may be stored in fields corresponding to installations or in both. Exemplary installation indicator fields include ILS_color, SIDS_approved_color, RMMCO_complete_color, etc. Notes Button 306 initiates a dialog to append notes to a project. Cells are color coded according to rules described below. Legend 308 indicates the significance of different colors, where green indicates a project is ready for implementation, yellow indicates actions are required to achieve readiness, red indicates immediate action is required, blue indicates delivery and completion of various documents, checks and reviews, white indicates status such as confirmed, planned but unconfirmed, and installed, and gold indicates a kit has been built. Icon 310 may be activated to initiate downloading of project data in a format readable by a third party program. Exemplary programs include spreadsheet, database and document creating programs.

Column category labels named according to the project data categories in the respective columns are shown in row 320. The labels include, from left to right, Facility, Alt Type, Alt Identifier, Baseline, Conj Alt, Conj Alt Num, Avail Start, Avail End, Region, Avail Location, CDMDOA Status, ILS Date, SIDS Approved, LOA, MATL Status and RMMCO Complete. Some project data identifies facilities, facility classes, and the like. Other project data identifies the completion date of tasks. Other project data indicates the status of a task or facility. In alternative embodiments, status codes may replace completion dates and vice-versa.

The color coding scheme of planned installation dashboard 300 cells is determined by alert rules predetermined to address a desired level of installation delay risk. The color of

a cell or row is based on the status of a performance indicator which may be set based on events or override selections. An event may include uploading an LOA for the Ship and Alteration ID or uploading certification, quality control and other documents. In the embodiment shown, the LOA document is tied to the LOA Column. When an LOA is uploaded, a dialog enables a user to select Ship and Alt ID which selects a row. The selection ties the LOA to the LOA column and specified row and sets the approval date for the requirement. The SCD document is tied to the Alt ID and linked on Alt Number. The CDMDOA document is tied to CDMDOA Status and linked on Ship and Alt ID. The ILS Cert document is tied to the ILS Date and linked on Ship and Alt ID. The Materials report is tied to Matl Status and linked on Ship and Alt ID.

Overrides may include cell and row overrides. An override occurs when a user sets an alert indicator to a level which is different from the level calculated based on the target date and the current date. For example, an installation with status pending may have a yellow cell color, but the color green may be shown instead by setting the corresponding indicator to "approved." Similarly, a row override occurs when a requirement with high importance is overridden which, in this exemplary embodiment, sets the alert level for all requirements with lower importance. An LOA may be the high importance requirement and, upon receipt of an LOA approval, all the cells in the corresponding row may be set to the approval color, e.g. green. The background color of the Notes Button may be changed from gray to aqua if a note which applies to the Ship and Alteration ID for the row has been added or edited recently, e.g. in the last 168 hours or seven days. Exemplary alert status rules for rows and requirements such as LOA, Baseline, ILS_Date, SIDS_Approved, Matl Status and RMMCO are shown below in TABLES 2-7.

TABLE 2

Exemplary Rules for Setting Row Color	
Rules	Color
Authorization LOA uploaded; or LOA_color value set to Green; or Authorized user is logged on and the RMMCO Complete field contains a date	Green
Default	Gray

TABLE 3

Exemplary Rules for Setting LOA Cell Color	
Rules	Color
Authorization LOA uploaded; or LOA_color value set to Green	Green
Pending LOA uploaded; or LOA_color value set to Yellow	Yellow
Deferred LOA uploaded; or LOA_color value set to Red	Red
Default	Gray

A baseline is a specification applicable to a class of facilities used to track whether a facility has been upgraded according to a modernization program, for example. The first facility specification defines the baseline and baseline date. As the baseline is changed over time, the baseline date changes. Installation and project codes are compared to baseline dates to recognize if a facility has been upgraded to the current baseline. If it has not, then a particular installation kit designed to be installed in a baselined facility may not be suitable.

15
TABLE 4

Exemplary Rules for Setting Baseline Cell Color	
Rules	Color
Authorization LOA uploaded; or LOA_color value set to Green; or Baseline_color value set to Green	Green
Default	Gray

Uploading the ILS document provides the ILS approval date. No date is provided if the ILS document is not uploaded. Generally, it is desirable to achieve the ILS milestone months before the date when a ship (facility) is scheduled to go offline and become available for certain installations. In this example, the target date for ILS completion is before A-7 (months). If ILS is not completed between A-6 and A-7 (months), the installation may be jeopardized so the alert is raised by changing the cell color from green to yellow. Likewise, it is raised to red if ILS is not completed between A-6 and A-0. Alert timing depends on the complexity of the facilities group, parts availability and uniqueness, cost of delay, and so forth, and may be greater or less than the time durations described herein.

TABLE 5

Exemplary Rules for Setting the ILS Date Cell Color	
Rules	Color
Authorization LOA uploaded; or LOA_color value is set to Green; or ILS Certification Document previously uploaded, which is evident when the field contains uploaded date information; or ILS_Date_color value is set to Green	Green
The present date is between 6 and 7 months before the Avail_Start_Date value and the ILS Certification Document was not uploaded; or ILS_Date_color value is set to Yellow	Yellow
The present date is between 6 months and the Avail_Start_Date value and the ILS Certification Document was not uploaded; or ILS_Date_color value is set to Red	Red
Default	Gray

The SIDS approval date is the date when facilities management approves the installation drawings. If the field is blank, then the cell color may be changed by completing a check of the ship (facility) and a community review. This procedure reflects dual or multiple lines of responsibility. Facility management may provide approval up the line management and the approval is then communicated to the installation organization (often referred to as corporate or plant engineering staff) which is reflected in source data. Alternatively, field checks may be performed which may require both line management and installation staff agreement. Also, delivery of the SIDS document may mitigate risk further. Some projects may involve equipment, software, training and other tasks which do not require alteration of a facility. An appropriate code may be provided in the alteration_type field to identify whether a project is such a project and to designate that a SIDS procedure is not required to be followed.

16
TABLE 6

Exemplary Rules for Setting the SIDS Approved Cell Color	
Rules	Color
Authorization LOA uploaded; or LOA_color value is set to Green; or Alteration_Type value equals "SA" and SIDS_Date value is a valid date; or SIDS_Approved_color value is set to Green	Green
Alteration_Type value equals "SA" and SIDS_Date value is not a valid date; or SIDS_Approved_color value is set to Yellow	Yellow
Alteration_Type value equals "SA", SIDS_Date value is not a valid date, Shipcheck value is a valid date, Community_Review value is NULL, and SIDS_Delivered value is NULL	Pale Blue
Alteration_Type value equals "SA", SIDS_Date value is not a valid date, Community_Review value is a valid date, and SIDS_Delivered value is NULL	Sky Blue
Alteration_Type value equals "SA", SIDS_Date value is not a valid date, and SIDS_Delivered value is a valid date	Light
Alteration_Type value equals "SA" and SIDS_Date value is not a valid date; or SIDS_Approved_color value is set to Red	Blue Red
Default	Gray

The Matl Status cell identifies the status of materials and material kits necessary to perform an installation to mitigate installation delay risk due to parts unavailability at the critical time. A materials document is a document used to transfer responsibility for materials. A material "owned" by logistics, for example, may be transferred to a line organization and after the transfer the logistics organization no longer can use or transfer the material. This ensures that when materials are allocated by transfer to the installation organization, those materials will remain available. A kit is a group of materials handled by system 10 as a single item. A kit is built when the kit components are assembled. As with LOA and ILS milestones, time periods may be designated to set the alert status for materials.

TABLE 7

Exemplary Rules for Setting Matl Status Cell Color	
Rules	Color
Alteration type value is not "SWD" and materials document uploaded	Green
Alteration_Type value is not "SWD", Kit_Built value is not a valid date, present date is between 60 and 30 days before Avail_Start_Date value, and SIDS_Date value is not a valid date	Yellow
Alteration_Type value is not "SWD" and Kit_Built value is a valid date	Light Orange
Alteration_Type value is not "SWD", Kit_Built value is not a valid date, and present date is between 30 and 0 days before Avail_Start_Date value	Red
Default	Gray

The RMMCO Complete date represents another approval from another organization. e.g. a regional (Atlantic/Pacific) organization. A regional organization may have responsibility for groups of facilities. For example, a regional organization may control a warehouse, port or staging area and the related facilities (trucks, ships, IT hardware).

TABLE 8

Exemplary Rules for Setting RMMCO Cell Color	
Rules	Color
NDE_completed value is a valid date; or RMMCO_Complete_Color is set to green	Green
Default	Gray

Selection of a readiness category button displays an Avail Planning Report including the requirements with the selected readiness level for the selected facility. Selection of a Move button moves the associated row data to a different readiness category.

The All Avails Report presents a list of all availability periods for facilities with availability. The data includes the availability dates, locations and types. The Completed Installations Report presents the status of projects installed in the indicated facilities within a selected timeframe such as last four months, last 6 months and so on.

FIGS. 14 and 15 are, respectively, full and partial screen shots of workload planner dialog 340 initiated by activating workload planner button 302 and the resulting work load planner 350 page. Workload planner dialog 340 enables selection of class, ship, alt ID, start-end dates, region, and alert level to select a subset of all project data and to create a specialized report showing, for example, only those rows containing installation data for availabilities starting within a specified timeframe (i.e., A-0 to A-30 days) and/or occurring on specified geographical regions. Start and end dates are shown as A-30 and A-360 indicating selection of a period which is between a year and a month before the current date. As shown, the selection includes all projects to be installed in facilities in class DDG005 having activities dated between a year and a month prior to the current date, in all regions and regardless of alert level. FIG. 15 shows that the initial set of 531 records (shown in FIG. 14) was reduced by the selection to 46 records. Workload planner page 350 displays the same project data cells as planned installations dashboard 300 and, additionally, displays selection criteria box 360 showing the selection criteria selected in workload planner dialog 340.

Uploaded documents are linked to cells in the manner previously described. FIG. 16 is a partial view of planned installations dashboard 300 showing hyperlink 370 in the ship column. The hyperlink is displayed on mouseover of a cell having a linked document. Clicking the cell produces the document. The Ship column has links to ship drawings, the LOA column has links to LOA documents, the Alteration ID column has links to alteration drawing documents, the CDM-DOA Status column has links to CDMDOA documents, the ILS Date column has links to ILS Certification documents and the Matl Status column has links to materials documents.

FIGS. 17 to 20 are screen shots of availability planning GUI 400 initiated from reports menu 224 and including class selection box 402 for selecting a subset of available ships and text box 404 for providing instructions, e.g. legends describing codes, acronyms and initialities. Upon selection of a class, e.g. DDG 0051, legend tab 410, Atlantic region tab 412 and Pacific region tab 414 are presented in FIG. 18 with legend tab 410 active displaying text box 416 containing, illustratively, legends similar to those in text box 404. FIG. 19 shows another set of tabs including legend tab 420 and a plurality of tabs situated to the right of legend tab 420 with names corresponding to ships located in the Pacific region during the availability period and including DDG 0073, DDG 0097, DDG 0089 and DDG 014. Pacific region tab 414 and DDG 0097 tab 424 are selected, which selection causes presenta-

tion of a third plurality 430 of tabs situated below the facility tabs with names corresponding to alert status (zones). Yellow tab 434 is selected which causes display of projects in project display area 450 corresponding to projects having yellow alerts. Any move button 452 may be activated to generate dialog 454, shown in FIG. 20, for moving a record from a yellow zone to another zone. A reason for the move may be provided.

FIG. 21 is a partial screen shot of completed installations report 490 initiated by selecting the report from reports menu 224. Drop list 492 is provided to select installations completed within specified time periods, e.g. during the last 4 months. Similarly, additional reports may be generated representing all or subsets of the project data.

FIG. 22 is a screen shot of installations GUI 220 illustrating menu options of maintenance menu 226. A user activates the menu to choose from lists of reports and dialogs to present, edit, add and delete project data. A maintenance sub-module provides the capability to open forms to add or edit the data displayed in the various reports such as AR table, CTN, Alterations Support Services, and the like. A CTN or change tracking number is a four digit number assigned to an unapproved Alt. The CTN can be submitted for approval. Once approved and properly scheduled, the Alt will be reflected in source data as a five digit Alt number with the last four digits being the original CTN. The Alt number and associated data overwrites the CTN data which is then removed from the planned installations dashboard report.

FIGS. 23 and 24 are screen shots of exemplary maintenance dialogs which may be selected from maintenance menu 224 for editing alteration records. FIG. 23 shows alteration records dialog 500 and alteration records form 510 which pops up when add new record button 502 or any one of a plurality edit buttons 504 is activated. Alteration records form 510 enables editing alt type, alt identifier, alt brief, conj alt, and alt number fields which are the fields shown in alteration records dialog 500 cells/columns. FIG. 24 shows AR Records dialog 540 and AR edit form 550 which pops up when any one of a plurality edit buttons 542 is activated. AR edit form 550 enables editing milestone data pertaining to an installation, in the selected case alteration (identifier) SACG 0047 70039 K 00 (top row) was selected. Editable fields are shown in 3 columns showing timing windows denoted by A-18 (present minus 18 months), A-12 (present minus 12 months), and A-6 (present minus 6 months). Similarly, the remaining maintenance menu 224 options may be used to edit subsets of project data.

FIGS. 25-27 are screen shots of installations GUI 220 illustrating options of administration menu 228. A user activates the menu to choose from lists of dialogs to present, edit, add and delete project data. Like-named submodules perform the functions listed in the menu. An administration sub-module provides the capability to open the following GUIs to add or edit the data displayed in the various installation reports. FIGS. 26 and 27 are screen shots of exemplary administration dialogs for editing e-mail records. System 10 automatically generates e-mail notifications of actions past due, according to the alert rules, e-mail recipients, and e-mail descriptions. One exemplary dialog is e-mail recipient dialog 600 comprising add new record button 602 for adding new e-mail recipients and edit button 604 for editing e-mail recipients and the association between the recipient and an e-mail description, which association is achieved by selecting the recipient and e-mail description from drop-down lists provided by edit form 610. The other exemplary dialog is e-mail verbiage dialog 630 comprising add new record button 632 for adding new e-mail messages and edit button 634 for editing e-mail

verbiage and the association between the e-mail description and its verbiage, which association is achieved by entering the description and verbiage in fields provided by form 640. Other Add/Edit forms may be selected to add or modify Alt Type, Alt Costs, Install Contractor, Facility Classes, Delivery Schedule Locations, etc.

Finally, the Upload Documents menu selection enables a user to upload documents. A dialog with an Upload New Document button (not shown) opens to input a document name and title, SCD number, and type of document, e.g. SCD, drawing or LOA. After the required data is provided and the upload button is activated, the document is uploaded which causes the generation of corresponding dashboard links and resetting of various alert status indicators.

While this disclosure has been described as having exemplary designs, the present disclosure can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the disclosure using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this disclosure pertains and which fall within the limits of the appended claims.

What is claimed is:

1. A project management system comprising:

a computing system having a computer readable medium;

and

a plurality of processing sequences stored on said computer readable medium comprising:

a first group of processing sequences associated with an installation module operable to facilitate a plurality of requirement and project data input and output said requirements and project data in documents, reports and graphical user interfaces;

a second group of processing sequences associated with an inventory module operable to facilitate a plurality of inventory or material management activities associated with a plurality of material or supply items, said inventory or material management activities comprising managing and associating said material or said supply items with said projects or requirements; and

a third group of processing sequences associated with a logistics module operable to facilitate planning associated with movements of said material or said supply items used in relation to said projects;

a plurality of user interfaces operable to display user selectable controls and information related to said installation module, inventory module, and logistics module;

wherein said plurality of processing sequences further comprise:

a first processing sequence embodied in the computer readable medium operable to provide a user interface section of at least one of said plurality of user interfaces to display a plurality of alert indicia corresponding to a plurality of alert status corresponding to said plurality of requirements, the plurality of requirements corresponding to said plurality of projects and including at least one of complete and incomplete requirements, and the plurality of alert indicia representing the plurality of alert status;

a second processing sequence embodied in the computer readable medium operable to convert an incomplete requirement to a complete requirement upon completion of a task corresponding to the incomplete requirement;

a third processing sequence embodied in the computer readable medium operable to determine the alert status of the requirements of the plurality of projects based on

a time difference between a current date and a target date corresponding to each requirement;

a fourth processing sequence embodied in the computer readable medium operable to select a first project from the plurality of projects, select a project alert status, and override the alert status of incomplete requirements of the first project based on the project alert status selected;

a fifth processing sequence embodied in the computer readable medium operable to select a first incomplete requirement of the first project, select a first requirement alert status, and override the alert status of the first incomplete requirement based on the first requirement alert status selected;

a sixth processing sequence embodied in the computer readable medium operable to send an alert message to a contact related to the requirement;

a seventh processing sequence embodied in the computer readable medium operable to complete the task corresponding to the incomplete requirement and causing the second processing sequence to convert the incomplete requirement to a complete requirement;

an eighth processing sequence embodied in embodied in the computer readable medium operable to provide a user interface section in one or more of said plurality of user interfaces to relate a plurality of approval pipes to a group identifier in a sequential order to generate a group of sequentially ordered approval pipes including at least one unapproved approval pipe;

a ninth processing sequence embodied in the computer readable medium operable to relate one or more said materials or said supply items required to complete said project or requirement to the group of sequentially ordered approval pipes;

a tenth processing sequence embodied in the computer readable medium operable to select a next unapproved approval pipe from the group of sequentially ordered approval pipes related to the item, the next unapproved approval pipe being the first unapproved approval pipe in the group of sequentially ordered approval pipes;

an eleventh processing sequence embodied in the computer readable medium operable to send a first message to a pipe contact corresponding to the next unapproved approval pipe prompting the pipe contact to approve the next unapproved approval pipe;

a twelfth processing sequence embodied in the computer readable medium operable to receive a pipe approval from the pipe contact and, upon receipt of the pipe approval, to convert the next unapproved approval pipe into an approved approval pipe;

a thirteenth processing sequence embodied in the computer readable medium operable to facilitate interface activities between said project management system and a plurality of source data repositories, said interface comprising input and output of source data from said source data repositories, said interface further comprising reading said source data from one or more of said plurality of source data repositories, reformatting said source data, and storing said source data in a plurality of data structures having a predetermined relationship with said source data;

a fourteenth processing sequence embodied in the computer readable medium operable to facilitate user input of a plurality of project data and requirement data associated with said plurality of projects and requirements, said plurality of project data comprises project identifier data, project description data, and facility or asset identifier data, geographic data for said facility or asset iden-

21

tifier data, and one or more facility or asset availability window time period data; and
 a fifteenth processing sequence embodied in the computer readable medium operable to facilitate user input data associated with one or more said material or said supply items and associate said material or said supply items with one of said plurality of projects or requirements; wherein the incomplete requirement is converted to a complete requirement when after all of the sequentially ordered approval pipes in the group of sequentially ordered approval pipes are approved.

2. The project management system of claim 1, wherein the alert indicia represents a probability of failure to satisfy the corresponding requirement before the requirement completion target date.

3. The project management system of claim 1, wherein the fourth processing sequence further includes a sixteenth processing sequence operable to select a plurality of projects and override the alert status of incomplete requirements of the plurality of projects based on the project alert status selected.

4. The project management system of claim 3, wherein the plurality of projects is selected based on at least one of a geographical location associated with said geographic data, a class data associated with said facility or asset identifier data, and a baseline configuration of said facility or asset identifier data.

5. The project management system of claim 1, wherein the alert indicia comprise a coded color scheme having a plurality of colors representing a plurality of priority levels.

6. The project management system of claim 1, wherein third processing sequence determines the alert status of the requirements of the plurality of projects based on the size of the time difference between the current date and the target date corresponding to each requirement.

7. The project management system of claim 1, wherein the alert indicia indicate a condition from the group comprising no action required, action required, and immediate action required.

8. The project management system of claim 1, wherein the alert message is selected from a plurality of alert messages corresponding to the plurality of priority levels.

22

9. The project management system of claim 1, wherein the task comprises uploading data associated with one or more documents, said one or more documents comprising a supply transaction document which triggers an action relative to said materials or said supply items used in relation to said projects, said action relative to said materials or said supply items comprise a requisition or shipment of one or more said materials or said supply items.

10. The project management system of claim 1, wherein the task comprises inputting a completion date.

11. The project management system of claim 1, wherein the task comprises completing a sequential approval process for an item related to the incomplete requirement with a sequential approval process system.

12. The project management system of claim 1, wherein said user interface section of at least one of said plurality of said user interfaces operable to display a plurality of alert indicia corresponding to a plurality of alert status further comprises a plurality of user selectable color coded graphical user interface tabs, each tab when selected displays a plurality of said projects associated with a said facility or asset identifier data having the same said alert status or alert indicia.

13. The project management system of claim 12, wherein said plurality of user selectable color coded graphical user interface tabs are associated with a different said alert status or said alert indicia, and comprise green, yellow, and red coded tabs.

14. The project management system of claim 1, wherein said user interface section of at least one of said plurality of said user interfaces operable to display a plurality of alert indicia corresponding to a plurality of alert status further comprises a plurality of user selectable user interface tabs comprising:

a plurality of regional tabs operable for selecting one or more said plurality of said projects associated with a said facility or asset identifier; and

a plurality of said facility or asset identifiers associated with the same class data associated with said facility or asset identifier data.

* * * * *