

EIA/JEDEC ENGINEERING PUBLICATION

Symbol and Labels for Moisture- Sensitive Devices


JEP113-B

(Revision of JEP113-A)

MAY 1999

ELECTRONIC INDUSTRIES ALLIANCE

JEDEC Solid State Technology Association



NOTICE

EIA/JEDEC standards and publications contain material that has been prepared, reviewed, and approved through the JEDEC Board of Directors level and subsequently reviewed and approved by the EIA General Counsel.

EIA/JEDEC standards and publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for use by those other than JEDEC members, whether the standard is to be used either domestically or internationally.

EIA/JEDEC standards and publications are adopted without regard to whether or not their adoption may involve patents or articles, materials, or processes. By such action JEDEC does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the EIA/JEDEC standards or publications.

The information included in EIA/JEDEC standards and publications represents a sound approach to product specification and application, principally from the solid state device manufacturer viewpoint. Within the JEDEC organization there are procedures whereby an EIA/JEDEC standard or publication may be further processed and ultimately become an ANSI/EIA standard.

No claims to be in conformance with this standard may be made unless all requirements stated in the standard are met.

Inquiries, comments, and suggestions relative to the content of this EIA/JEDEC standard or publication should be addressed to JEDEC Solid State Technology Association, 2500 Wilson Boulevard, Arlington, VA 22201-3834, (703)907-7560/7559 or www.jedec.org

Published by
©ELECTRONIC INDUSTRIES ALLIANCE 1999
Engineering Department
2500 Wilson Boulevard
Arlington, VA 22201-3834

This document may be downloaded free of charge, however EIA retains the copyright on this material. By downloading this file the individual agrees not to charge or resell the resulting material.

**PRICE: Please refer to the current
Catalog of JEDEC Engineering Standards and Publications or call Global Engineering
Documents, USA and Canada (1-800-854-7179), International (303-397-7956)**

Printed in the U.S.A.
All rights reserved

PLEASE!

DON'T VIOLATE
THE
LAW!

This document is copyrighted by the Electronic Industries Alliance and may not be reproduced without permission.

Organizations may obtain permission to reproduce a limited number of copies through entering into a license agreement. For information, contact:

JEDEC Solid State Technology Association
2500 Wilson Boulevard
Arlington, Virginia 22201-3834
or call (703) 907-7559

SYMBOL AND LABELS FOR MOISTURE-SENSITIVE DEVICES

(From JEDEC Board Ballot JCB-98-132, formulated under the cognizance of the JC-14.1 Subcommittee on Reliability Test Methods for Packaged Devices.)

1 Introduction

Certain plastic surface-mount components are subject to permanent damage due to moisture-induced failures encountered during high-temperature surface-mount processing unless appropriate precautions are observed.

2 Purpose

The purpose of this publication is to provide a distinctive symbol and labels to be used to identify those devices that require special packing and handling precautions.

3 Reference documents

J-STD-020 Moisture/Reflow Sensitivity Classification for Non-Hermetic Solid State Surface Mount Devices

J-STD-033 Standard for Handling And Shipping Of Moisture/Reflow Sensitive Surface Mount Devices

4 Symbol and labels

4.1 Moisture-sensitive symbol

This symbol (see Figure 1) indicates that devices are moisture sensitive to a level from 2 to 6 and it appears on all moisture sensitive caution labels (see Figure 4).



Figure 1 — Moisture-sensitive symbol

4 Symbol and labels (cont'd)

4.2 Moisture-Sensitive Identification (MSID) label

This label should be on the lowest level shipping container to indicate that moisture-sensitive devices are in the container. This label is recommended to be a minimum of 3/4 inch (19 millimeters) in diameter. See Figure 2.

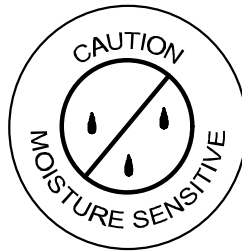


Figure 2 — MSID Label

4.3 Moisture-sensitive caution labels

4.3.1 Level 1

This label is required only if the classification temperature is 235 °C and shall be placed on the lowest level shipping container to identify the devices as “NOT MOISTURE SENSITIVE”. See Figure 3.

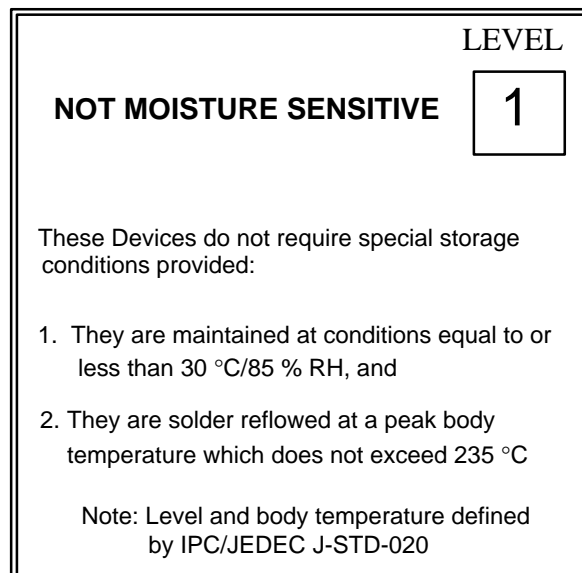


Figure 3 — Information label for level 1

4 Symbols and Labels (cont'd)

4.3.2 Levels 2-5a

The moisture-sensitive caution label shall be used for levels 2, 2a, 3, 4, 5, and 5a as defined by J-STD-020. See Figure 4. This label is required on the moisture barrier bag and will provide the following information:

- (a) Moisture classification level.
- (b) The calculated shelf life in the sealed bag
- (c) The peak package body temperature (Top surface) used for device classification as defined by J-STD-020.
- (d) The floor life of the device at 30 °C/60%RH as defined by J-STD-020.
- (e) The bag seal date utilizing “MMDDYY”, “YYWW” or equivalent format.

An acceptable alternative will be to provide the above information on the adjacent bar code label.


	<p>CAUTION</p> <p>This bag contains</p> <p>MOISTURE-SENSITIVE DEVICES</p>	<p>LEVEL</p> <div style="border: 1px solid black; width: 40px; height: 30px; margin: 0 auto;"></div> <p><small>If Blank, see adjacent bar code label</small></p>
<ol style="list-style-type: none"> 1. Calculated shelf life in sealed bag: 12 months at < 40 °C and < 90% relative humidity (RH) 2. Peak package body temperature: _____ °C <small>If Blank, see adjacent bar code label</small> 3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must <ol style="list-style-type: none"> a) Mounted within: _____ hours of factory <small>If Blank, see adjacent bar code label</small> conditions ≤ 30 °C/60% b) stored at <10% RH 4. Devices require bake, before mounting, if: <ol style="list-style-type: none"> a) Humidity Indicator Card is > 10% when read at 23 ± 5 °C b) 3a or 3b not met. 5. If baking is required, devices may be baked for 48 hours at 125 ± 5 °C <p><small>Note: If device containers cannot be subjected to high temperature or shorter bake times are desired, reference IPC/JEDEC J-STD-033 for bake procedure</small></p> <p>Bag Seal Date: _____ <small>If Blank, see adjacent bar code label</small></p> <p><small>Note: Level and body temperature defined by IPC/JEDEC J-STD-020</small></p>		

Figure 4 — Moisture-sensitive caution label for levels 2-5a

4 Symbols and Labels (cont'd)

4.3.3 Level 6

Level 6 devices must be identified as “EXTREMELY MOISTURE SENSITIVE”. See Figure 5. This label is required on the moisture barrier bag and/or the lowest level shipping container. The label must specify the peak package body temperature at which the device was classified. If the required information is not provided on the caution label then it must be on the adjacent bar code label.

Level 6, as defined by J-STD-020, does not require that devices be shipped in a moisture-barrier bag with desiccant, etc. (dry-pack), since these devices require baking by the end user before use. However, moisture-barrier bags have become a “symbol” for moisture-sensitive devices and therefore are recommended to be used with level 6 device shipments. It is also recommended that these bags be sealed even though desiccant and humidity indicator cards (HIC) may not be inside the bags.

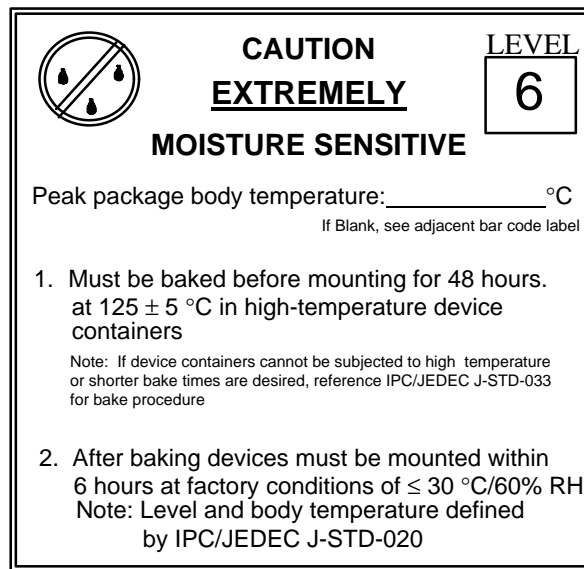


Figure 5 — Moisture-sensitive caution label for level 6

4.3.4 Label size

Labels are recommended to be a minimum of 3 inches (76.2 millimeters) by 3 inches (76.2 millimeters) square.

4.3.5 Label colors

The ID and caution labels shall be contrasting colors. These labels shall be legible to normal vision at a distance of three feet. Monochromatic reproduction in any color that contrasts with the background may be used. Where the choice of color is arbitrary, it is suggested that:

- 1) The ID label background be blue (Pantone #297C) with a black symbol and letters.
- 2) The caution label background be white with a blue (Process blue) symbol and letters.

Wherever possible the color red should be avoided as red suggests a personal hazard.

