



US008581771B2

(12) **United States Patent**
Bradley

(10) **Patent No.:** **US 8,581,771 B2**

(45) **Date of Patent:** **Nov. 12, 2013**

(54) **SCENE ILLUMINATOR**

(56) **References Cited**

(75) Inventor: **Timothy Bradley**, Loogootee, IN (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **The United States of America as represented by the Secretary of the Navy**, Washington, DC (US)

3,392,259	A	7/1968	Meier	
3,622,743	A	11/1971	Muncheryan	
3,989,942	A *	11/1976	Waddoups	398/170
4,134,008	A *	1/1979	de Corlieu et al.	398/170
4,177,580	A	12/1979	Marshall et al.	
4,249,265	A *	2/1981	Coester	398/170
4,439,767	A *	3/1984	Hefley et al.	342/14
4,566,009	A *	1/1986	Hanni et al.	342/45
4,575,786	A	3/1986	Roberts	
4,580,557	A	4/1986	Hertzmann	
4,763,361	A *	8/1988	Honeycutt et al.	398/170
4,838,167	A	6/1989	Prahauser et al.	
5,003,600	A *	3/1991	Deason et al.	342/42
5,142,288	A *	8/1992	Cleveland	342/45
5,198,607	A	3/1993	Livingston et al.	

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 472 days.

(21) Appl. No.: **12/778,892**

(22) Filed: **May 12, 2010**

(65) **Prior Publication Data**

US 2012/0098693 A1 Apr. 26, 2012

Related U.S. Application Data

(63) Continuation-in-part of application No. 12/541,772, filed on Aug. 14, 2009, now Pat. No. 8,305,252, and a continuation-in-part of application No. 12/511,056, filed on Jul. 28, 2009, now Pat. No. 8,436,276.

FOREIGN PATENT DOCUMENTS

WO	WO 99/07439	2/1999
WO	WO 2006/031351	3/2006

OTHER PUBLICATIONS

Galvanuskas et al., "KW-Power Fiber Lasers with Single Transverse Mode Output," Sep. 22, 2005, 5 pgs., downloaded from http://www.nufern.com/whitepaper_detail.php/30.

(Continued)

Primary Examiner — Bernarr Gregory

(74) Attorney, Agent, or Firm — Christopher A. Monsey

(51) **Int. Cl.**

H04K 3/00	(2006.01)
G01S 7/38	(2006.01)
G01S 7/495	(2006.01)
G01S 7/00	(2006.01)
F41G 7/22	(2006.01)

(52) **U.S. Cl.**

USPC 342/14; 342/13; 342/52; 342/53; 342/54; 455/1; 244/3.1; 244/3.15; 244/3.16; 398/39; 372/109

(58) **Field of Classification Search**


USPC 455/1; 398/39, 140, 168-172; 342/13-20, 29-51; 244/3.1-3.19; 726/2, 16-21, 26-30; 89/1.11; 372/109

See application file for complete search history.

(57) **ABSTRACT**

A system is disclosed to identify authorized EO devices and unauthorized EO devices within a scene. The system hampers the operation of the unauthorized EO devices detected within the scene.

17 Claims, 40 Drawing Sheets

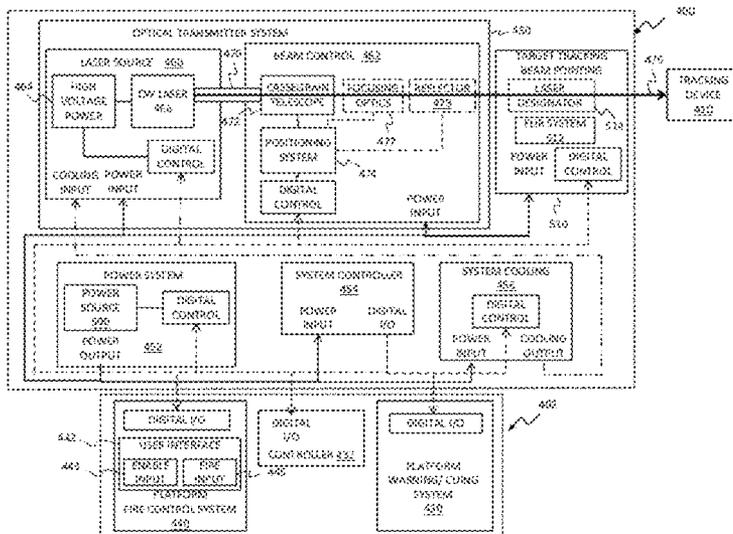

(56)

References Cited

U.S. PATENT DOCUMENTS


5,239,309 A * 8/1993 Tang et al. 342/13
 5,272,716 A 12/1993 Soltz et al.
 5,274,379 A * 12/1993 Carbonneau et al. 342/45
 5,319,434 A 6/1994 Croteau et al.
 5,339,328 A 8/1994 Miura
 5,396,243 A * 3/1995 Jalink et al. 342/45
 5,396,506 A 3/1995 Ball
 5,401,171 A 3/1995 Paghidiwala
 5,459,470 A * 10/1995 Wootton et al. 342/45
 5,500,525 A * 3/1996 Saban 342/45
 5,501,680 A 3/1996 Kurtz et al.
 5,539,565 A * 7/1996 Waddoups et al. 398/170
 5,549,477 A 8/1996 Tran et al.
 5,574,458 A 11/1996 Tran
 5,600,434 A 2/1997 Warm et al.
 5,635,905 A 6/1997 Blackburn et al.
 5,662,291 A 9/1997 Sepp et al. 244/3.13
 5,686,722 A * 11/1997 Dubois et al. 342/45
 5,694,408 A 12/1997 Bott et al.
 5,748,138 A * 5/1998 Telle et al. 342/45
 5,780,807 A 7/1998 Saunders
 5,793,476 A 8/1998 Laakmann et al.
 5,862,278 A 1/1999 Brauch et al.
 6,167,075 A 12/2000 Craig et al.
 6,187,213 B1 2/2001 Smith et al.
 6,269,617 B1 8/2001 Blanchard
 6,359,710 B1 3/2002 Takken et al.
 6,429,446 B1 8/2002 Labaugh
 6,587,486 B1 7/2003 Sepp et al.
 6,593,540 B1 7/2003 Baker et al.
 6,665,079 B1 12/2003 Tocci et al.
 6,670,222 B1 12/2003 Brodsky
 6,700,094 B1 3/2004 Kuntze
 6,703,582 B2 3/2004 Smart et al.
 6,773,119 B2 8/2004 Kimura et al.
 6,801,550 B1 10/2004 Snell
 6,903,674 B2 6/2005 Hoesel et al.
 6,933,877 B1 8/2005 Halladay et al.
 6,969,845 B2 11/2005 von Rosenberg, Jr.
 6,977,598 B2 12/2005 Longbottom
 7,017,467 B1 3/2006 Monroe
 7,053,812 B2 5/2006 Trainor
 7,154,591 B2 12/2006 Muentner et al.
 7,308,207 B2 * 12/2007 Chen 398/170
 7,397,014 B2 7/2008 Hart et al.
 7,425,916 B2 9/2008 Stevens, Jr.
 7,583,715 B2 9/2009 Hill et al.
 8,202,268 B1 6/2012 Wells et al.

2005/0104731 A1 5/2005 Park
 2005/0200705 A1 9/2005 Nieto
 2006/0000988 A1 1/2006 Stuart et al.
 2006/0159440 A1 7/2006 Purkayastha et al.
 2006/0218410 A1 9/2006 Robert et al.
 2007/0034615 A1 2/2007 Kleine
 2007/0169616 A1 7/2007 Vickroy
 2008/0144673 A1 6/2008 Gapontsev
 2009/0091738 A1 4/2009 Morcom
 2009/0092157 A1 4/2009 Gapontsev
 2009/0224958 A1 9/2009 Apek et al.
 2010/0076475 A1 3/2010 Yates et al.
 2010/0176097 A1 7/2010 Zhu

OTHER PUBLICATIONS

Peavey et al., "Comparison of Cortical Bone Ablations by Using Infrared Laser Wavelengths 2.9 to 9.2 μm ," Lasers in Surgery and Medicine, vol. 26, pp. 421-434, 1999.
 Valentine, "COTS laser technology targets emerging battlefield threats," RF Design, Nov. 29, 2007, 2 pgs., downloaded on Jun. 27, 2009 from www.printthis.clickability.com/pt/cpt?action=cpt&title=COTTS+Laser+Technology+.
 Waarts et al., "Fiber Lasers at JDS Uniphase," Fiber Lasers: Technology, Systems, and Applications, Proc. of Society of Photo-Optical Instrumentation Engineers, 2004, vol. 5335, 12 pgs.
 Brown, J.M., "Digital Model of a Generic Infrared Tracker," Thesis in partial fulfillment of requirements for Master of Science in Electrical Engineering, May 1992, cover and pp. i-vii, 1-26, and 66-71, Indiana.
 Dornheim, M.A., "Cost of Protection," Aviation Week, 2008, 2 pgs., downloaded from website http://aviationweek.com/aw/generic/story_generic.jsp?channel=awst&id=news/11145p3.xml.
 Globalsecurity.org, "Large Aircraft Infrared Countermeasures (LAIRCМ)," 3 pgs., downloaded from <http://www.globalsecurity.org/military/systems/aircraft/systems/laircm.htm> Dec. 9, 2008.
 Matthews, W., "New Angle on Missile Defense; U.S. Overcomes Cost Obstacles With UAV-based Infrared Sensor," Defense News, Sep. 29, 2008, 3 pgs., downloaded Dec. 5, 2008 from <http://www.defensenews.com/story.php?i=3746183>.
 Osborn, K., "Army looks to field laser jammer by 2010," Army Times, May 12, 2007, 2 pgs., downloaded from http://www.armytimes.com/new/2007/05/defense_bae_jammer_070511a/ Dec. 5, 2008.
 Raytheon Company, "Scorpion Aircraft Protection System; Light-weight, Cost-Effective Missile Protection for Tactical Aircraft," 2006, 2 pgs.
 "New Technology Aimed at Stopping Movie Piracy", downloaded from www.getthebigpicture.net, Sep. 22, 2009, 2 pgs.

* cited by examiner

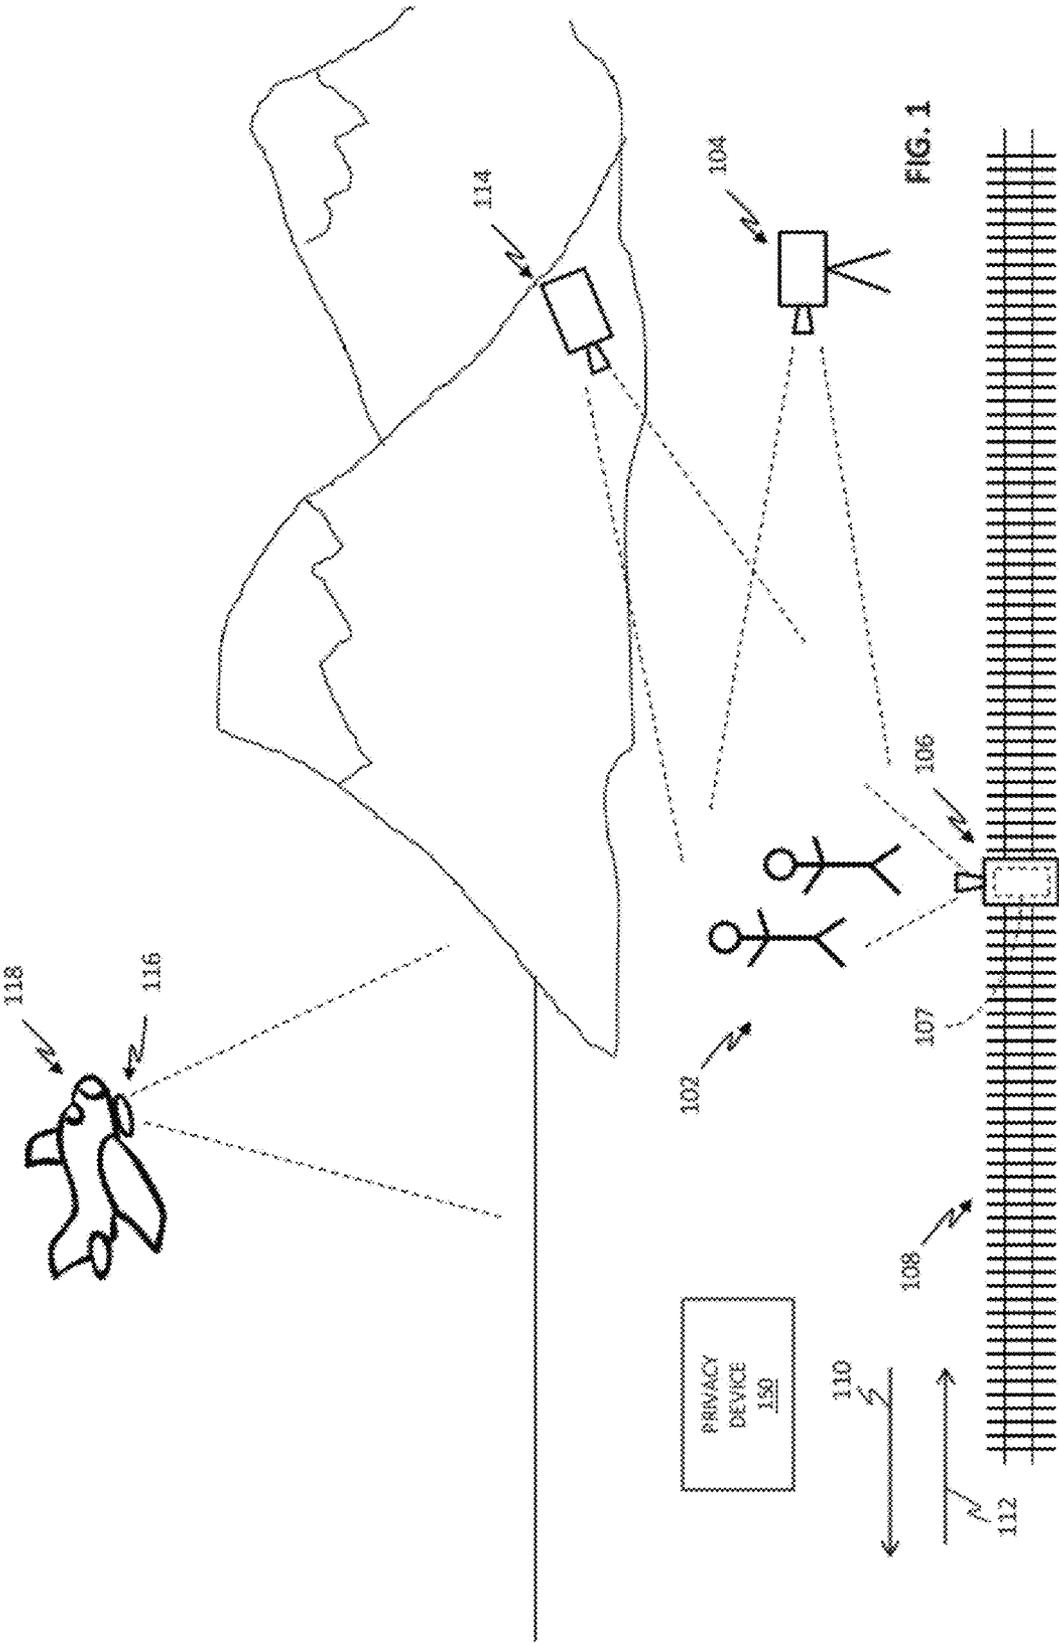

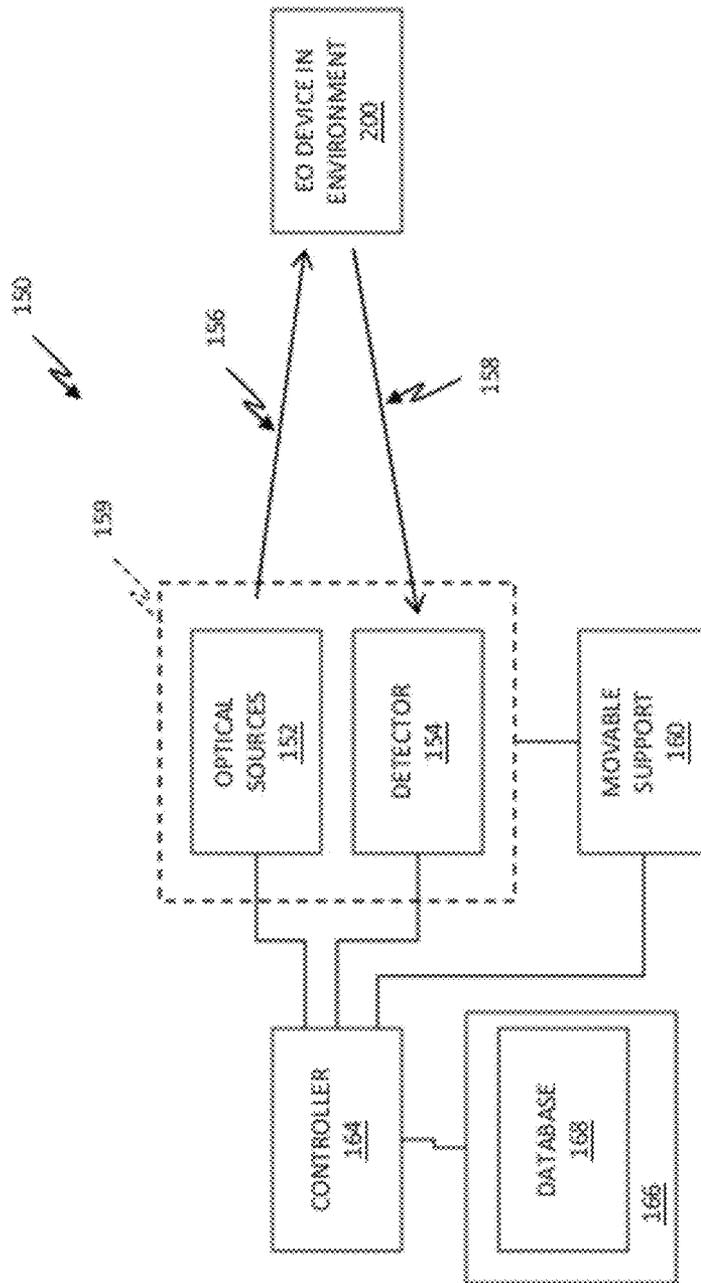


FIG. 2

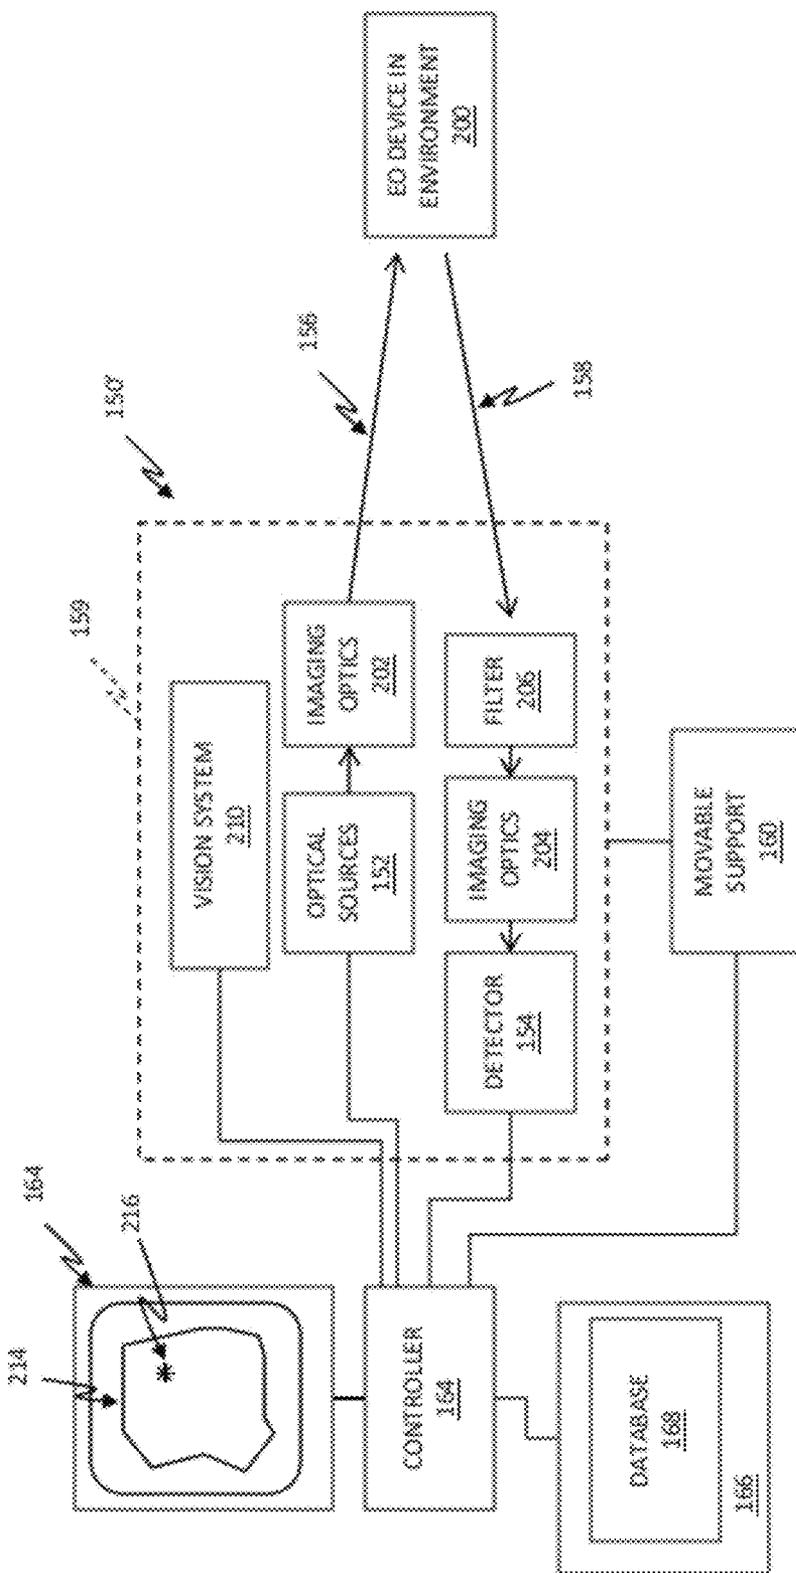


FIG. 2A

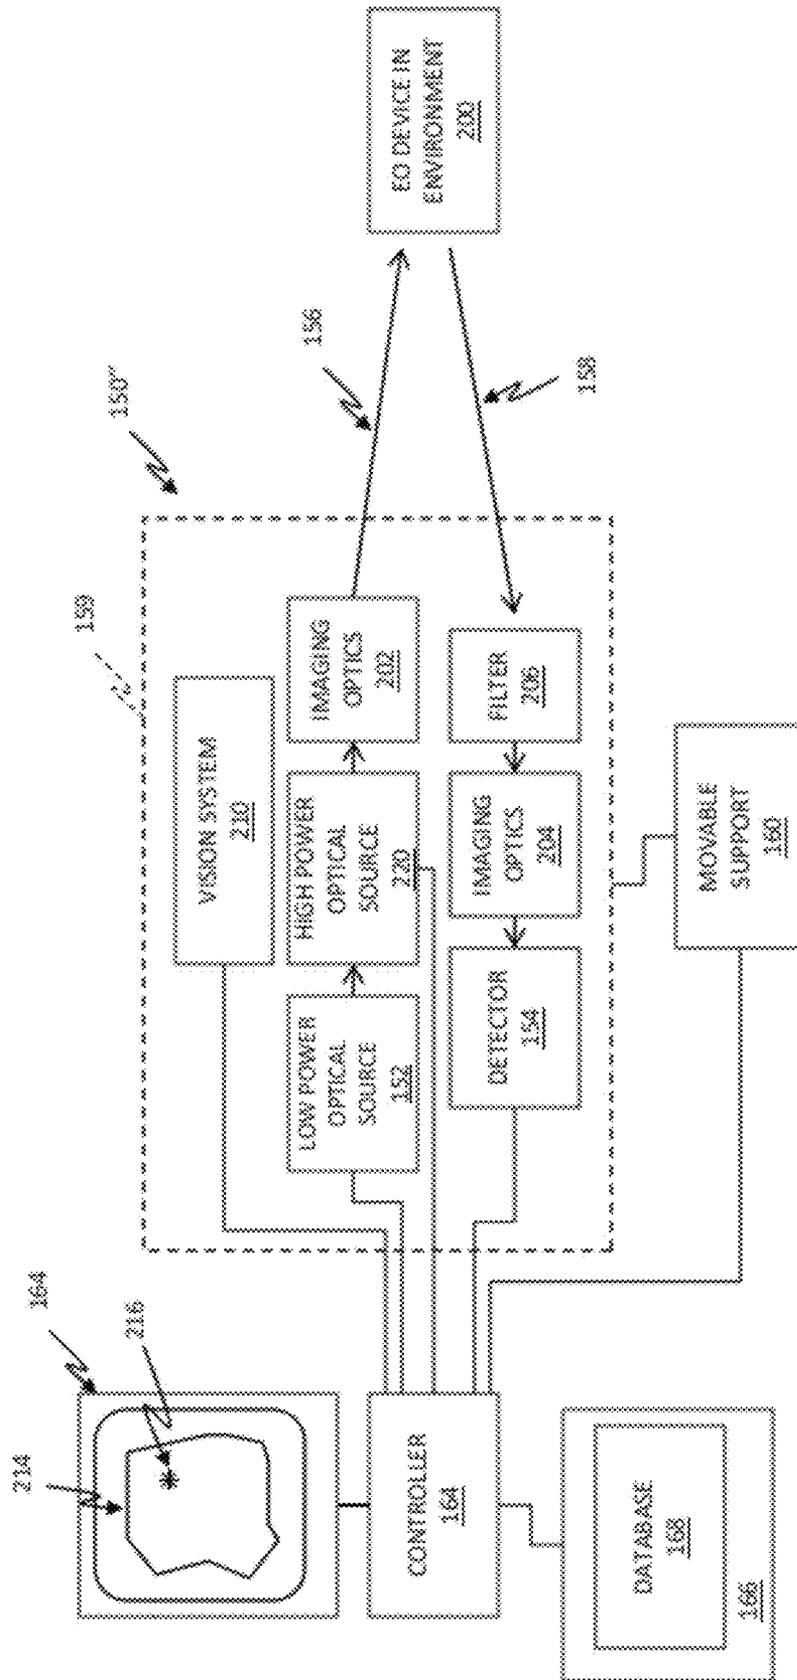


FIG. 2B

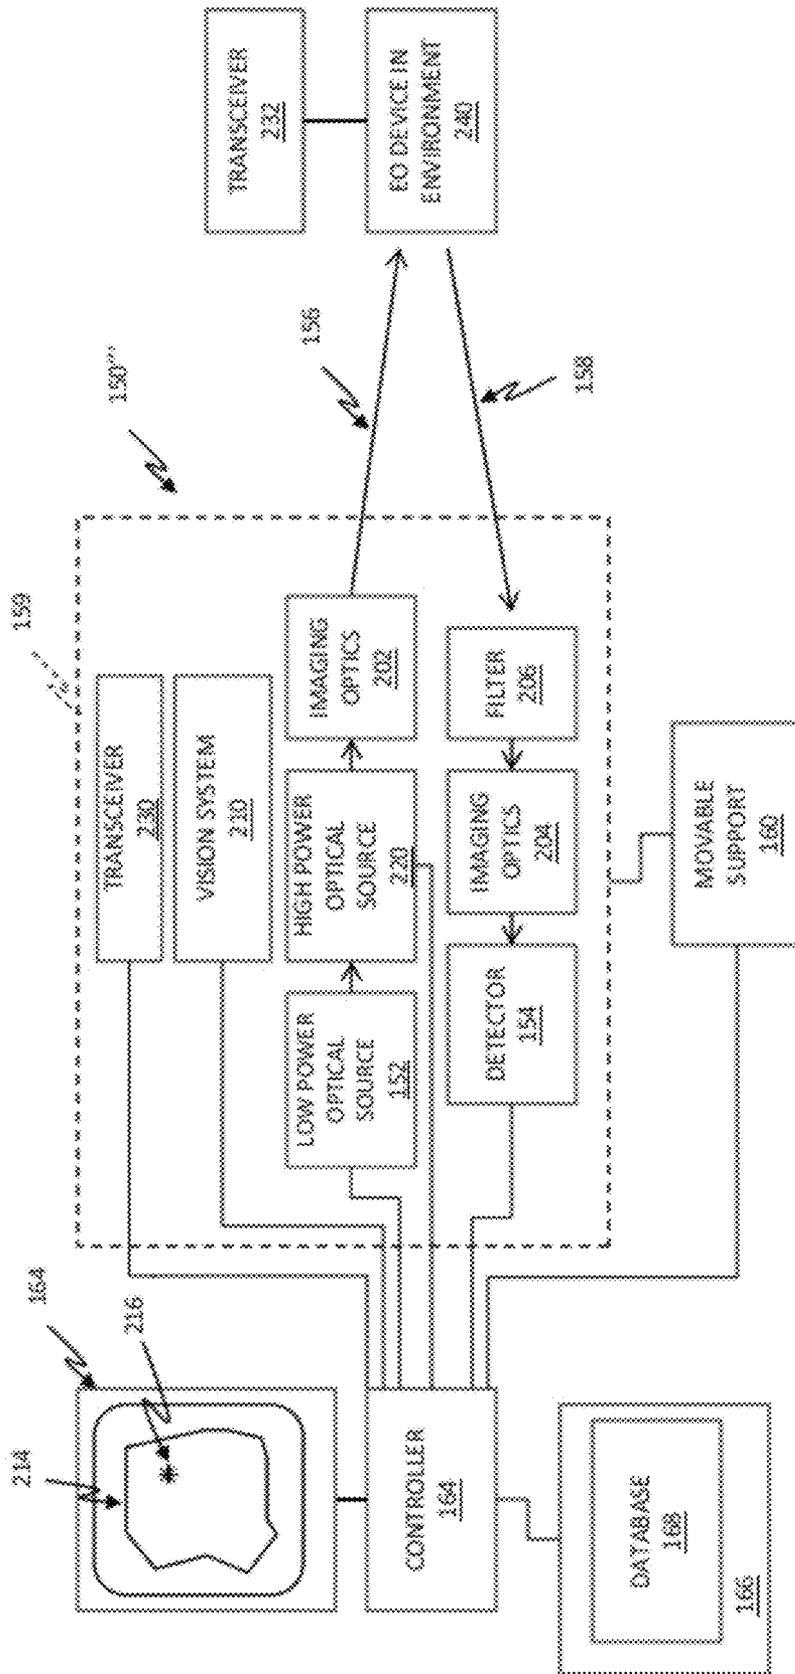


FIG. 2C

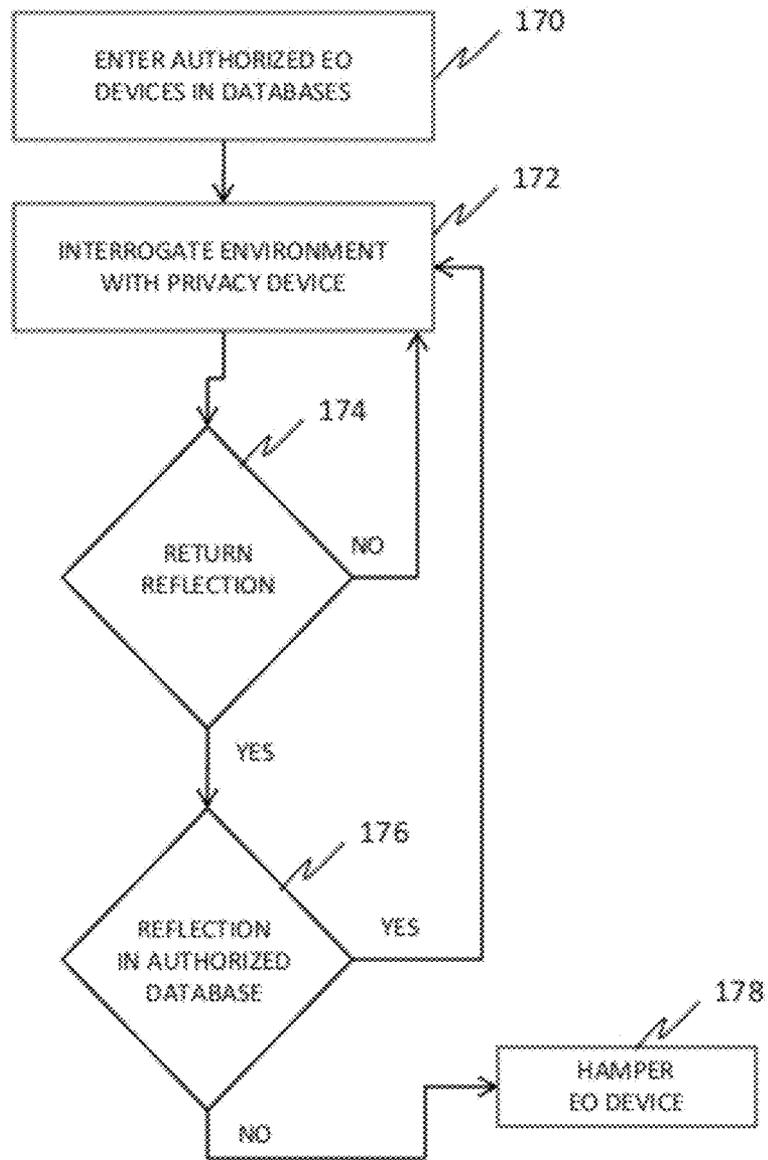


FIG. 3

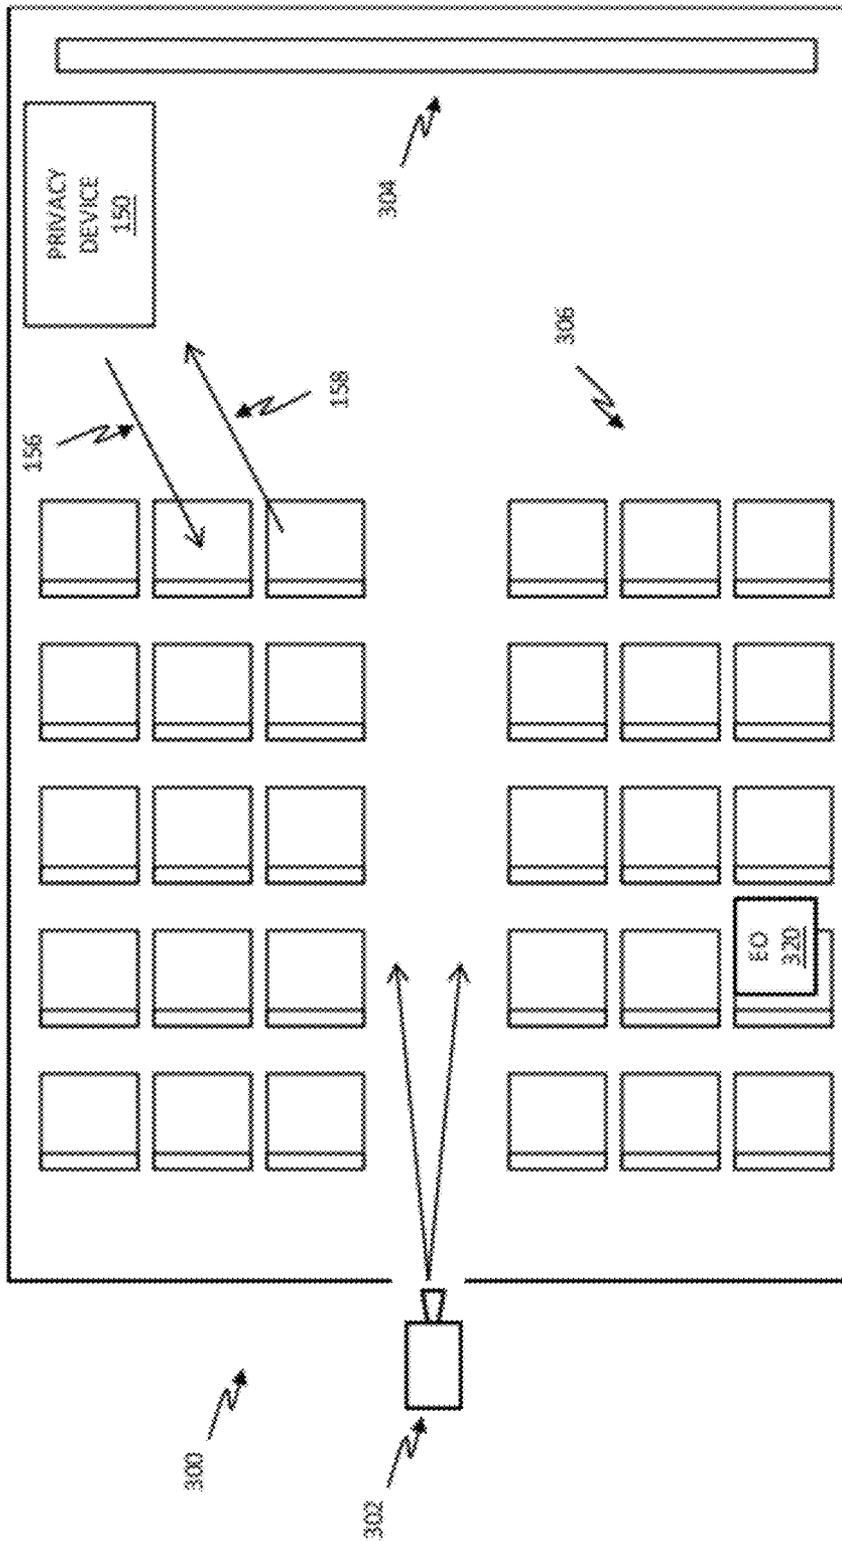


FIG. 4

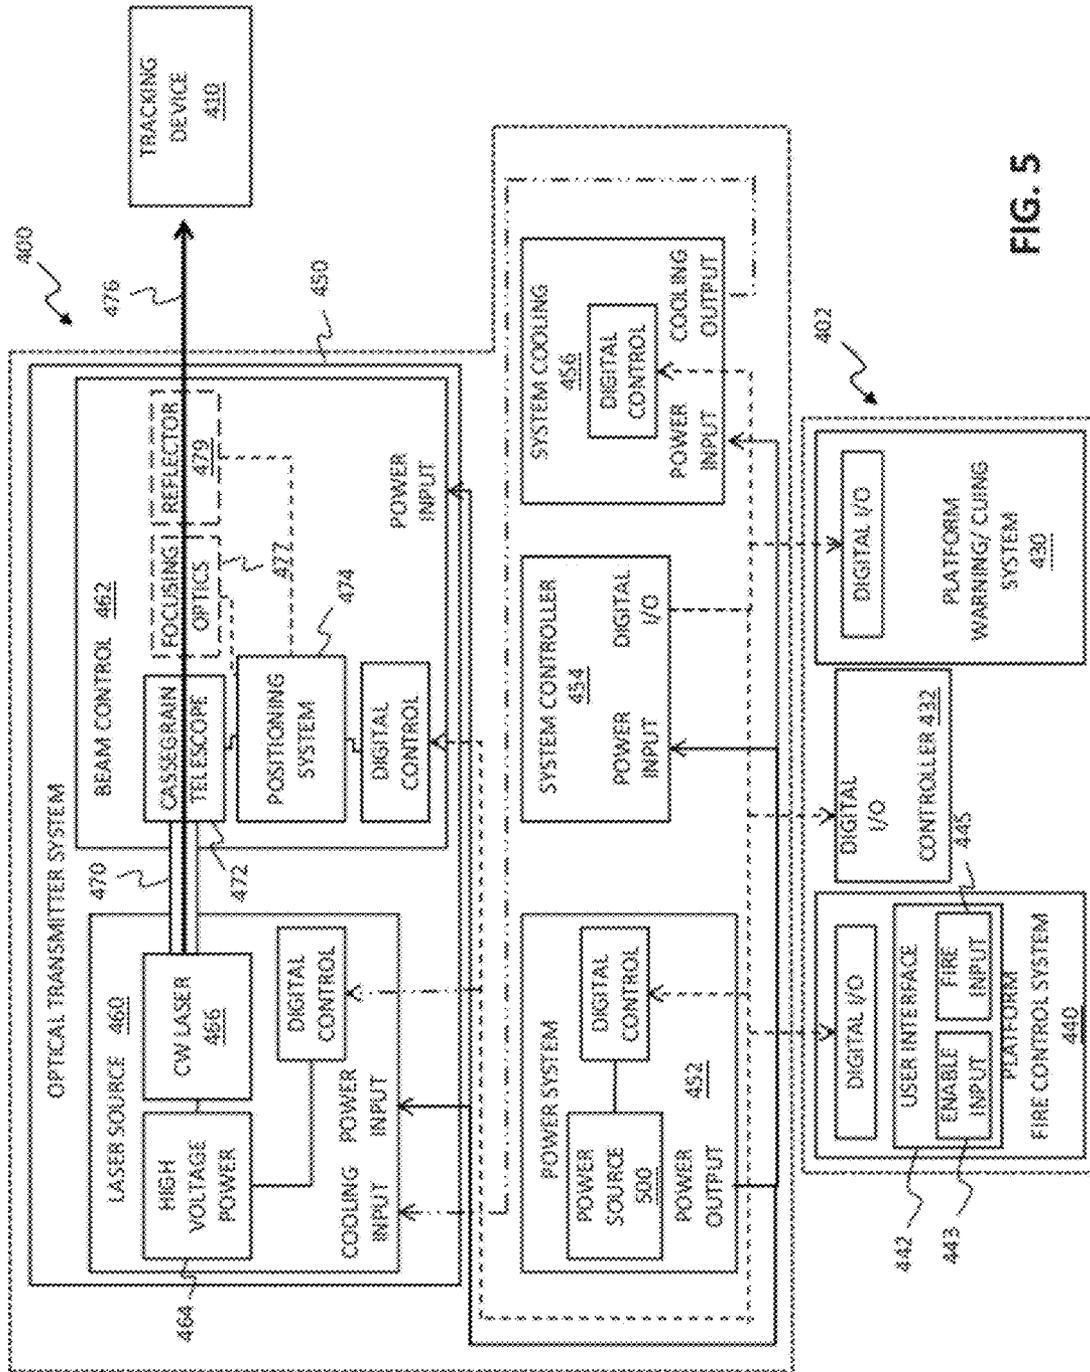


FIG. 5

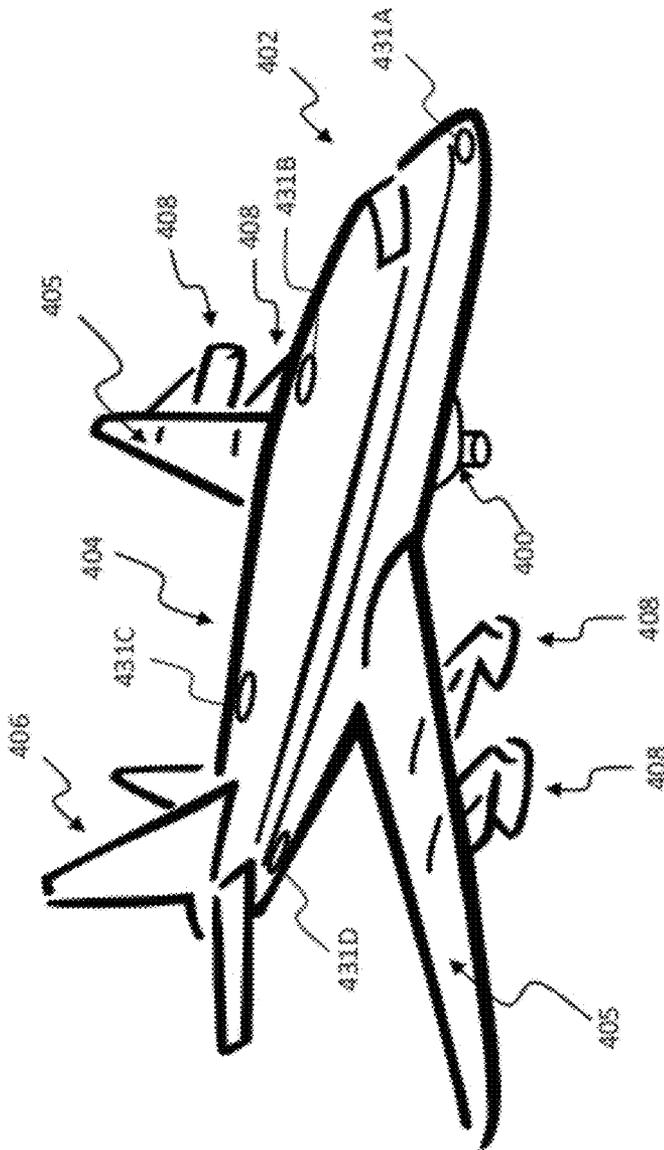


FIG. 6

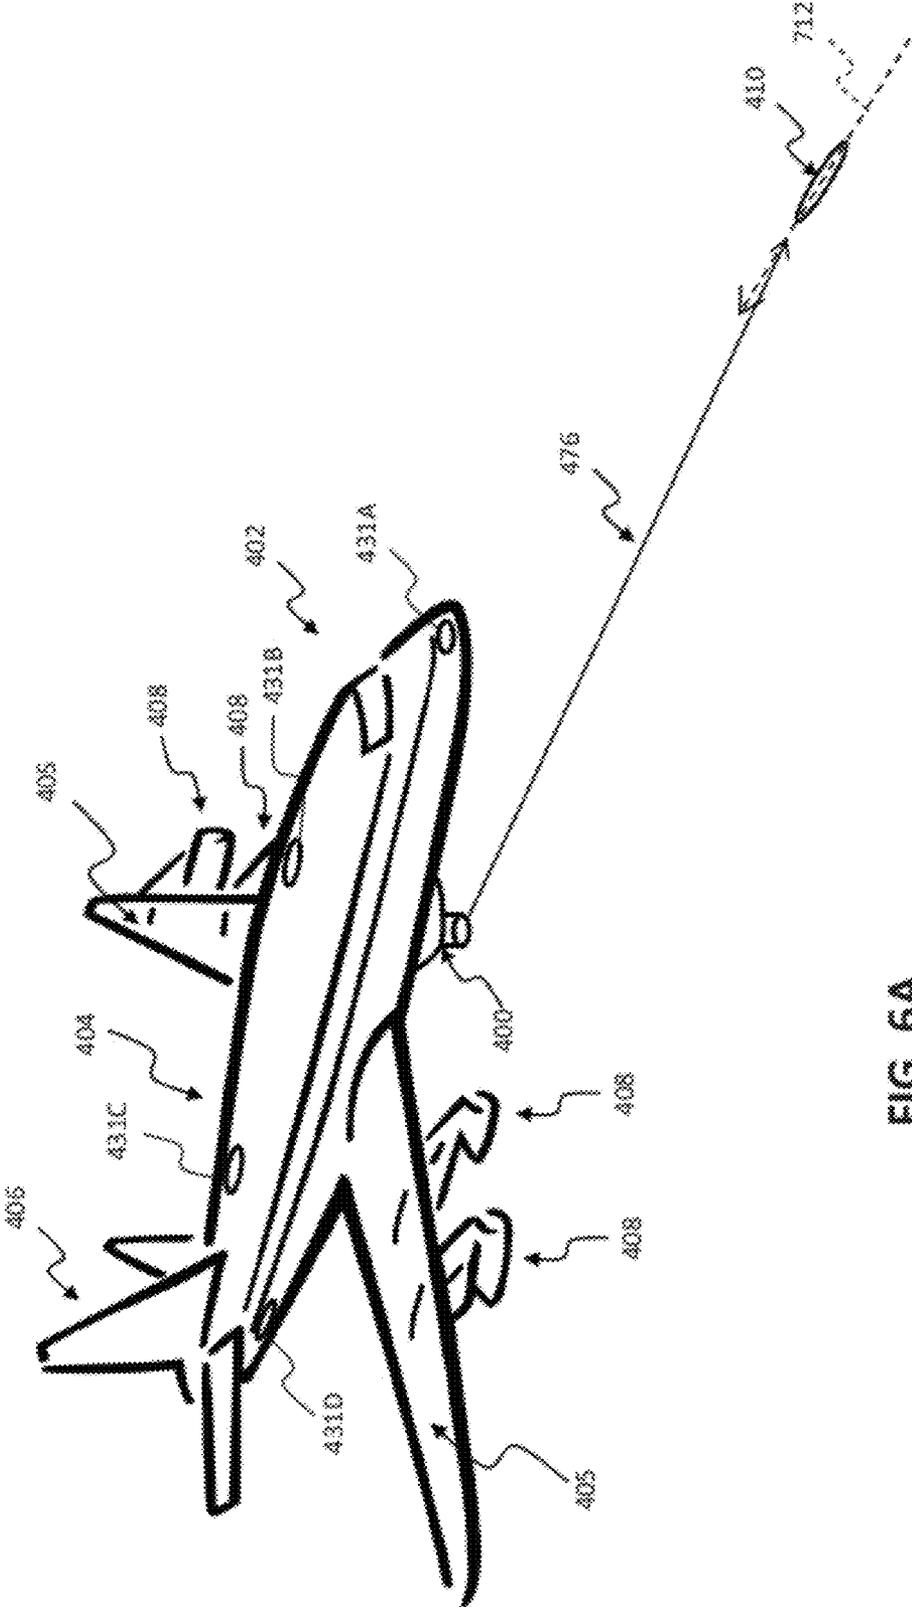


FIG. 6A

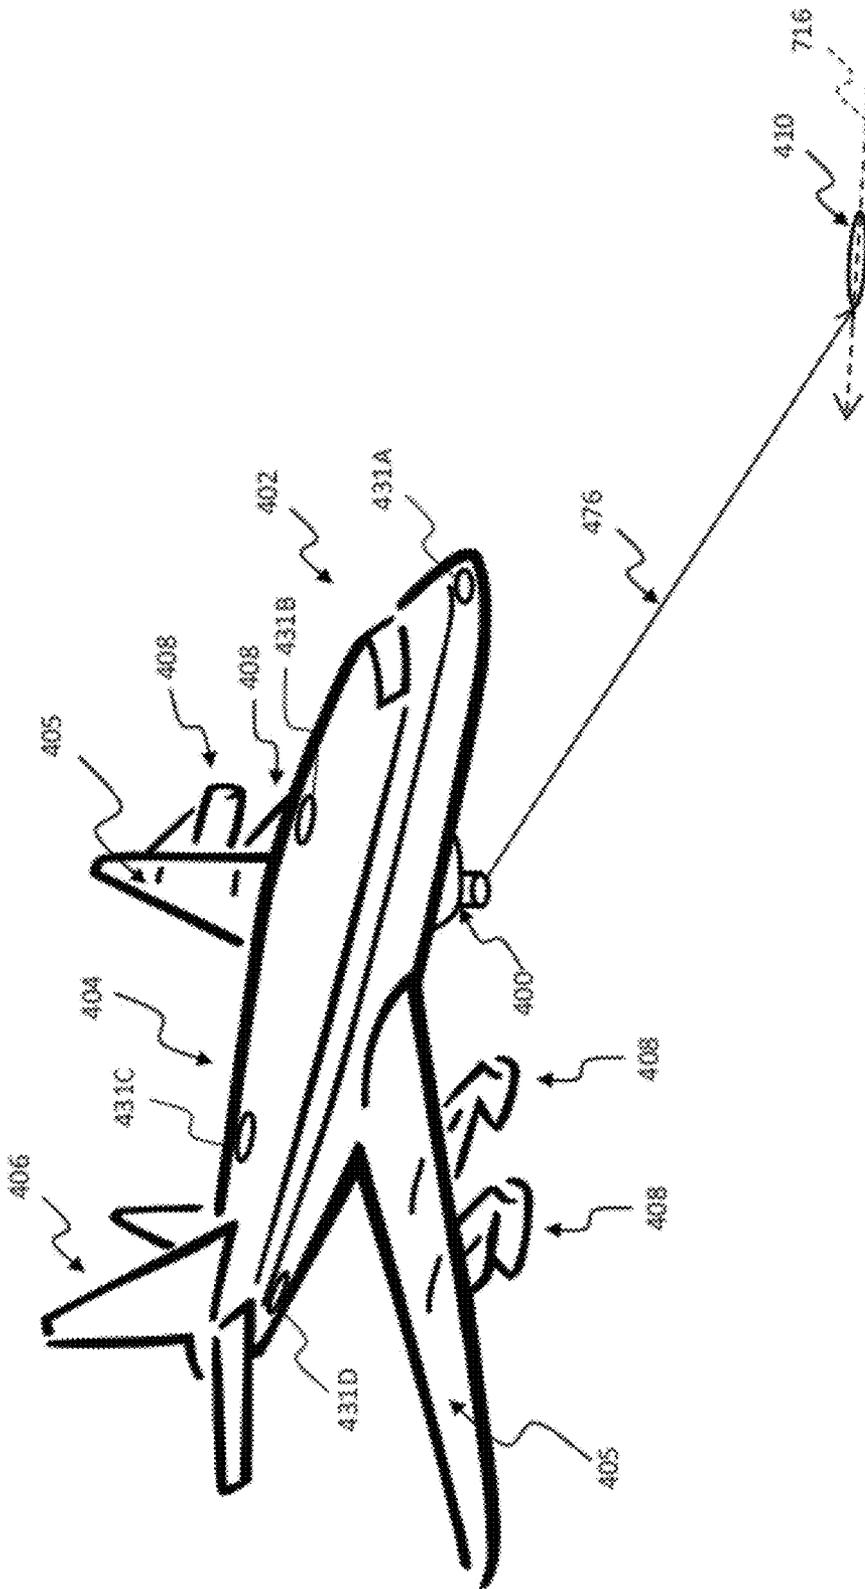


FIG. 6B

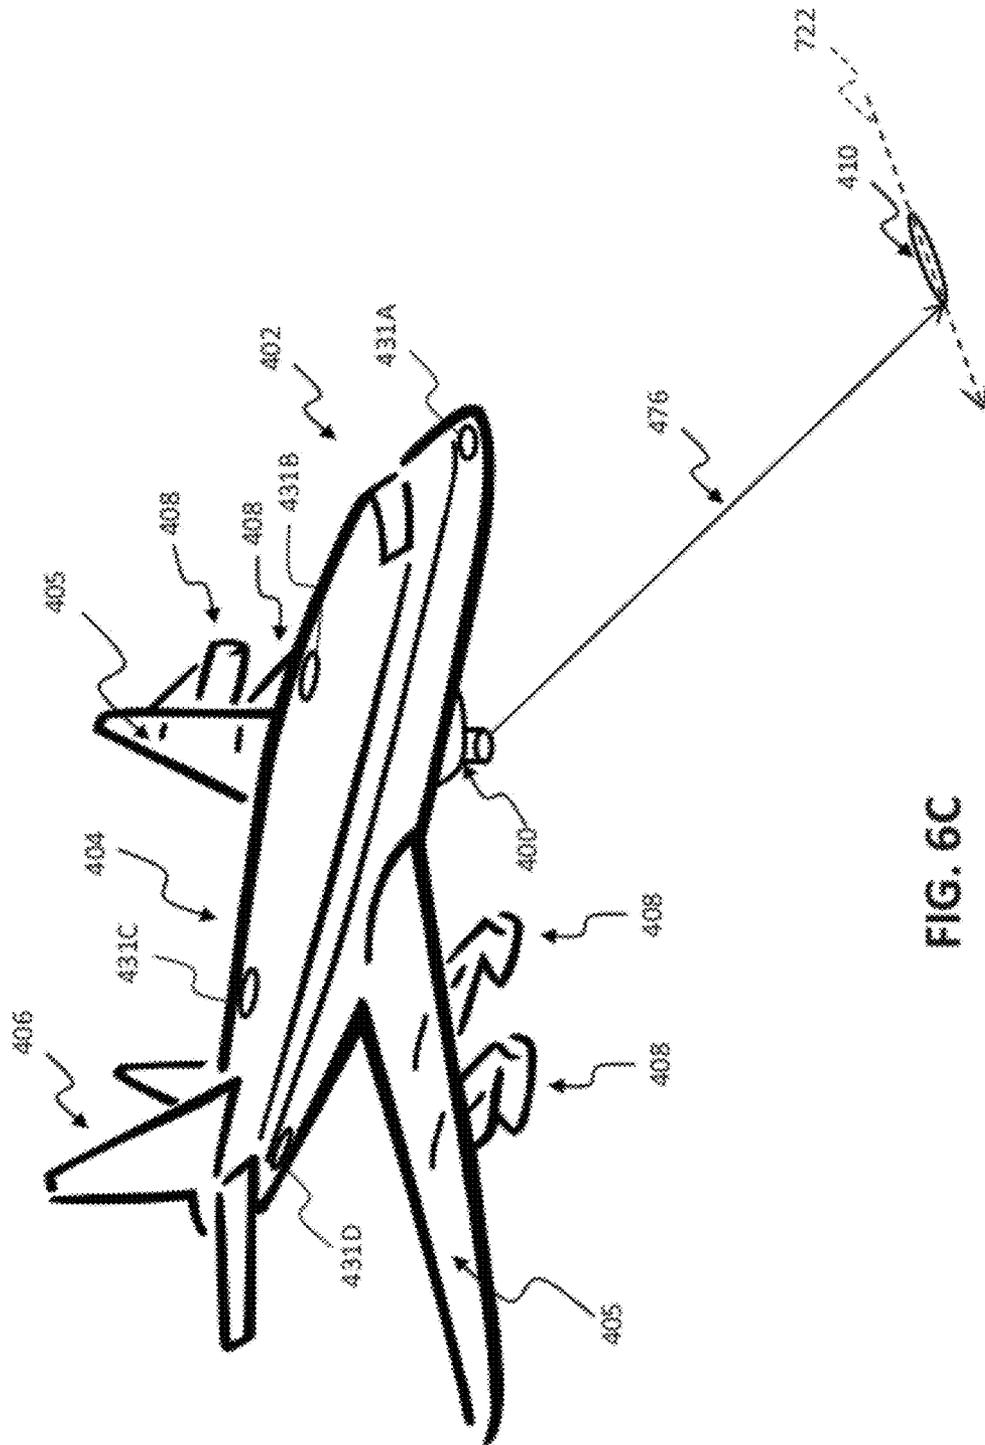


FIG. 6C

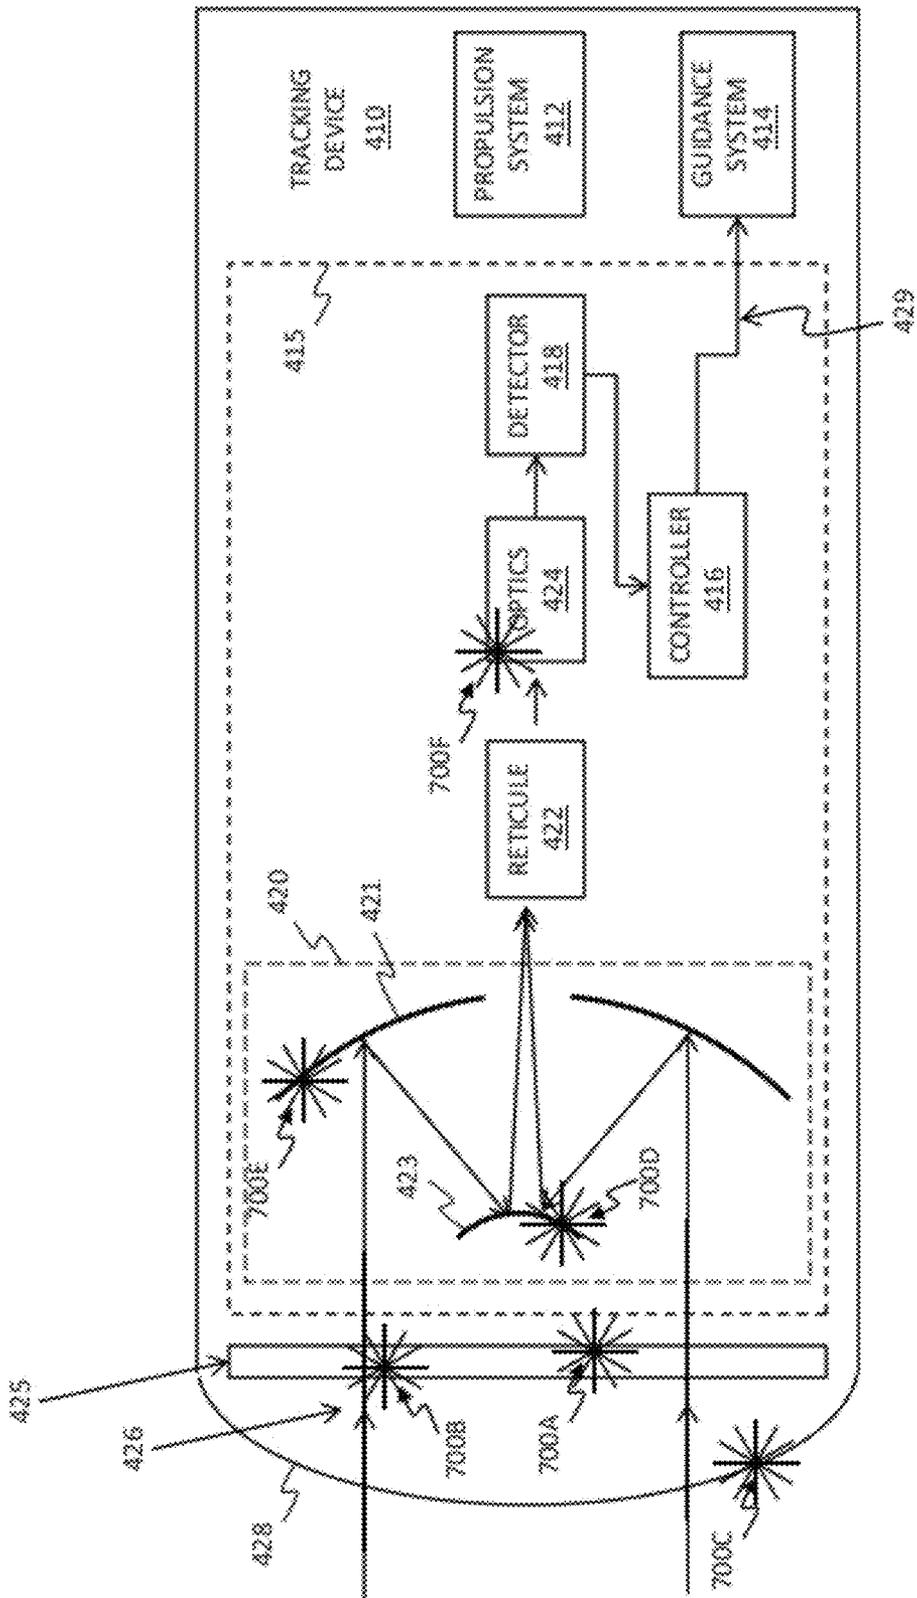


FIG. 7

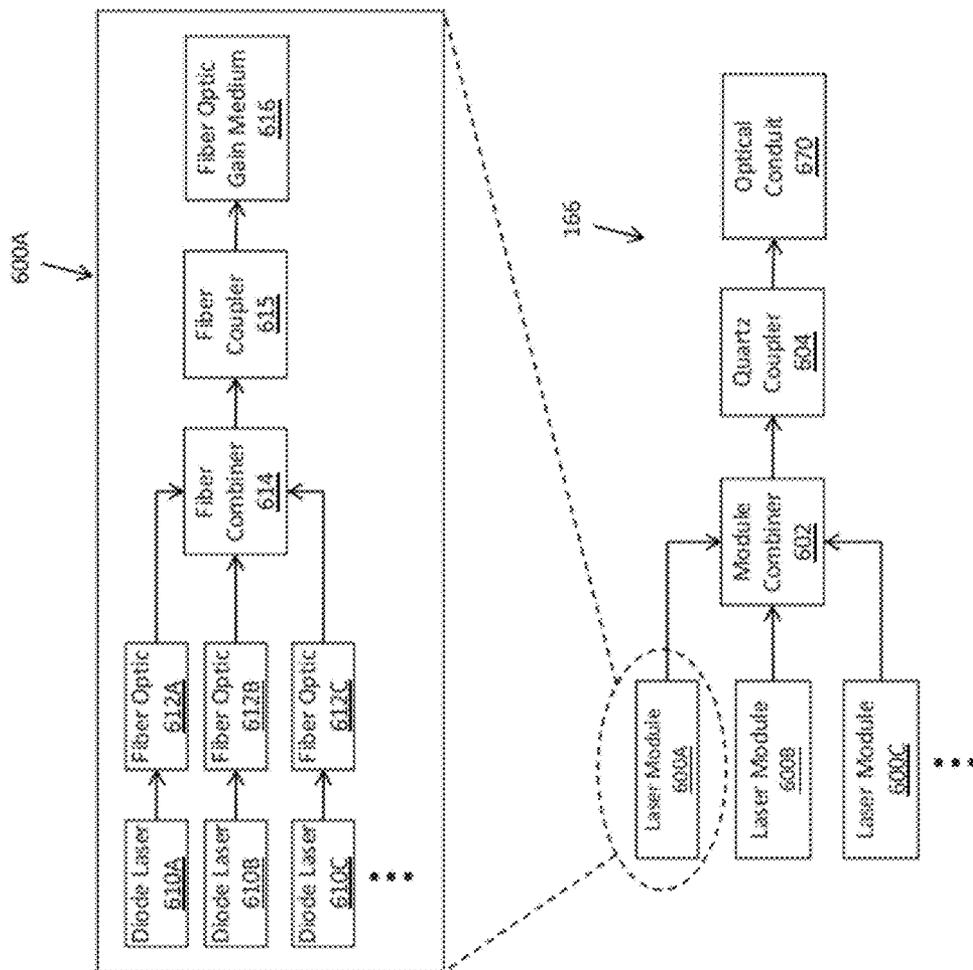


FIG. 8

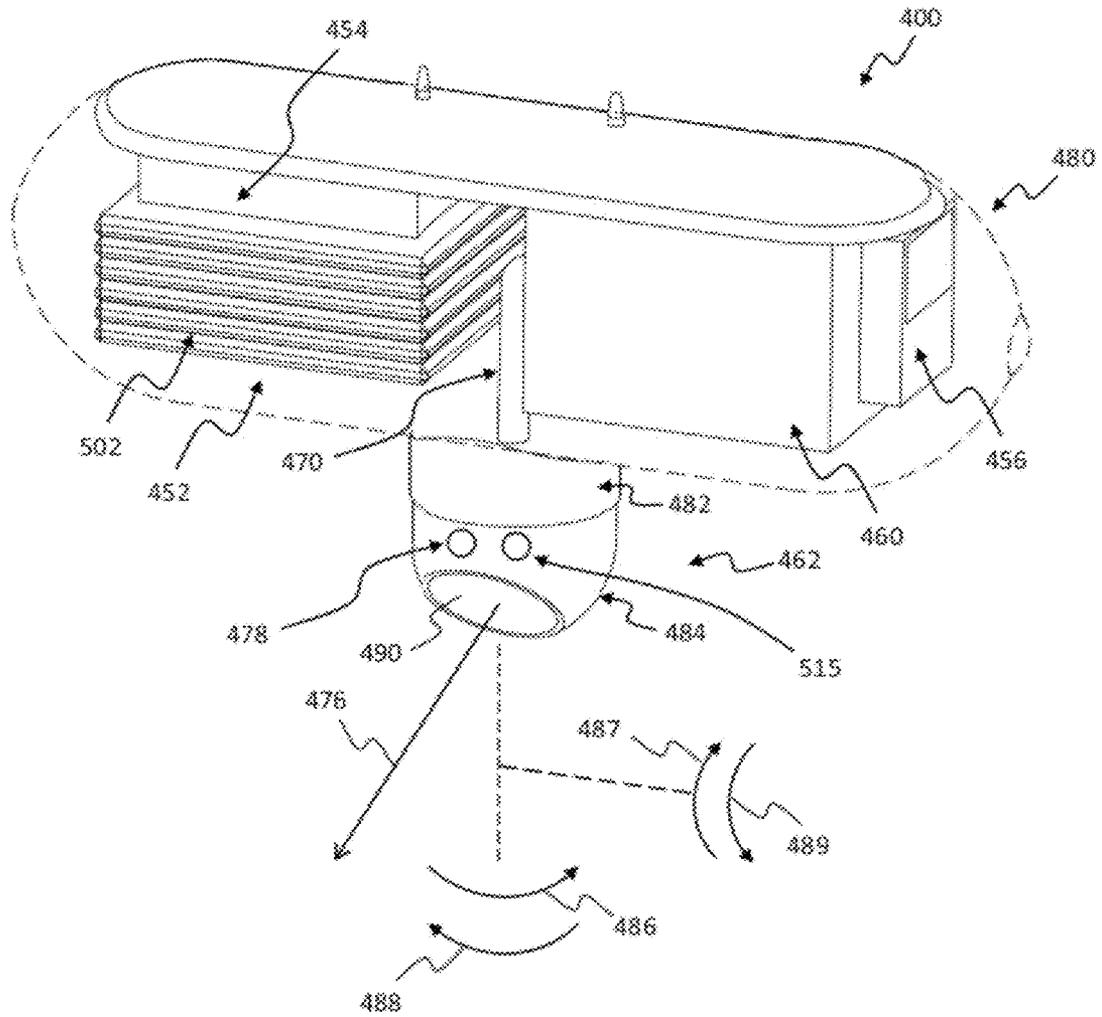


FIG. 9

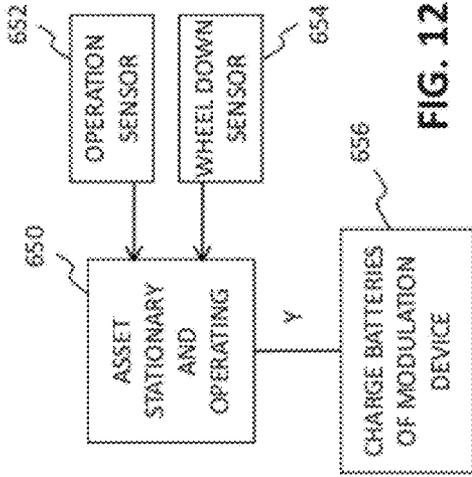


FIG. 12

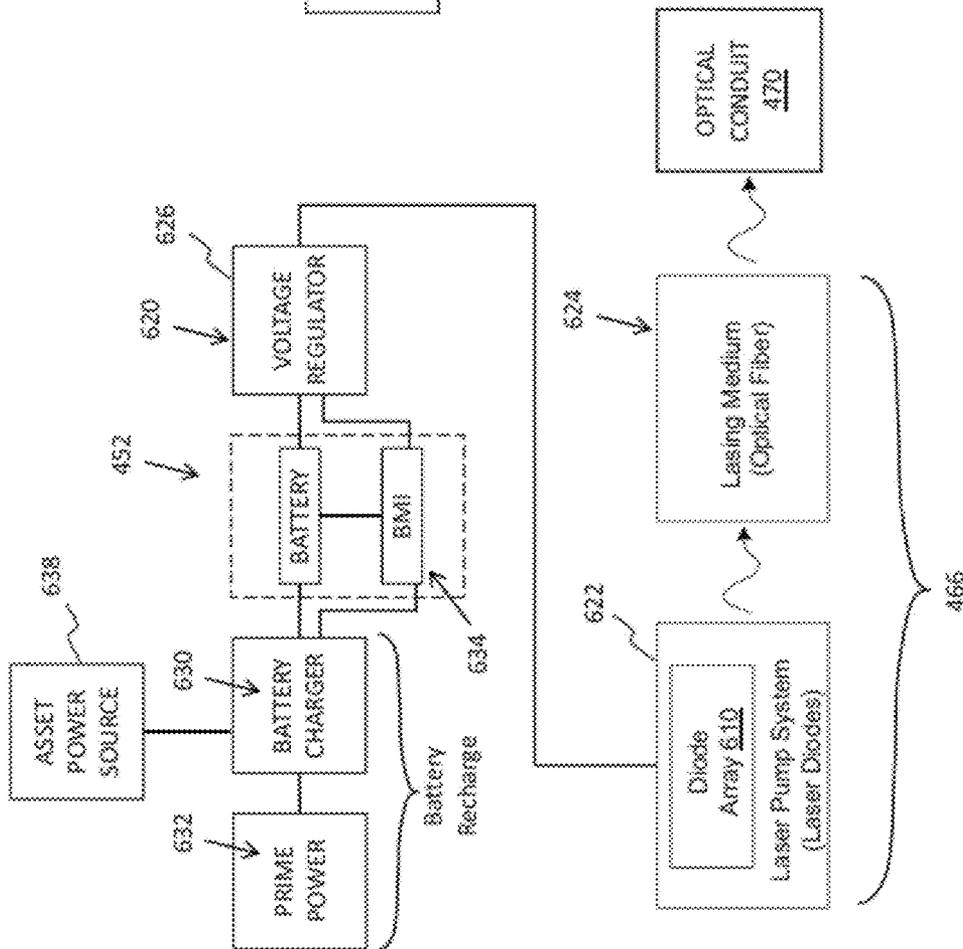


FIG. 10

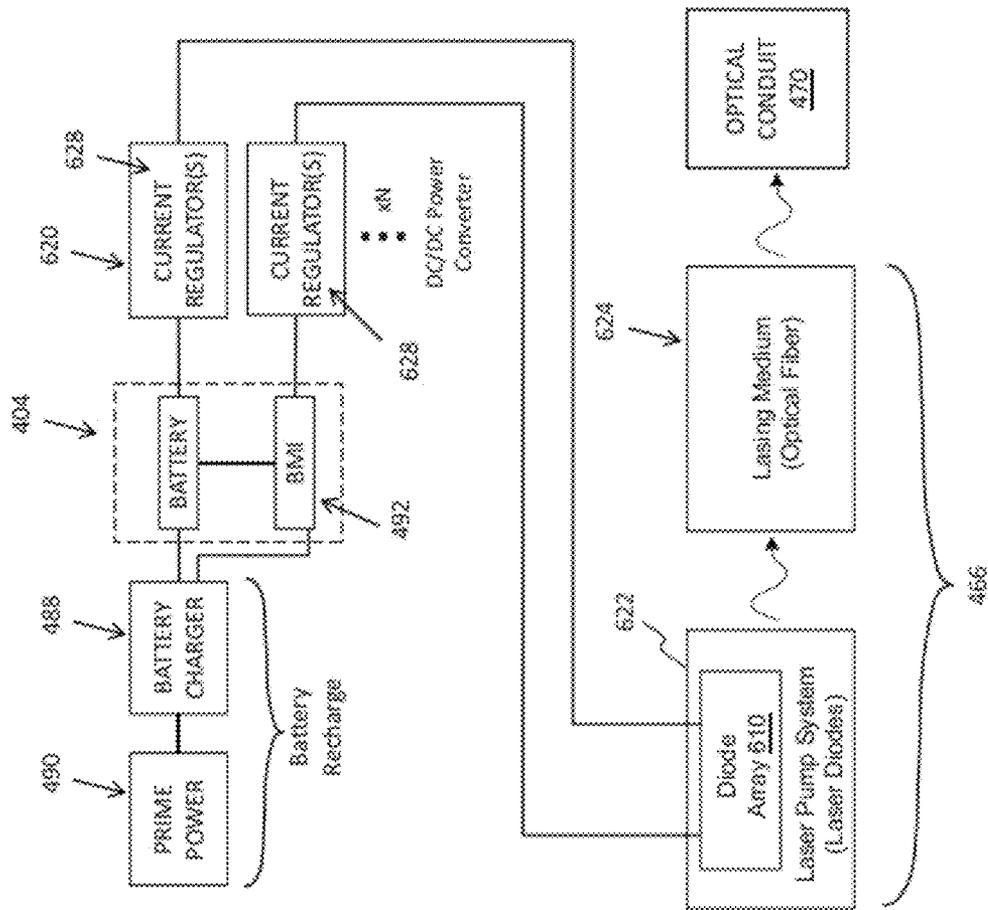


FIG. 11

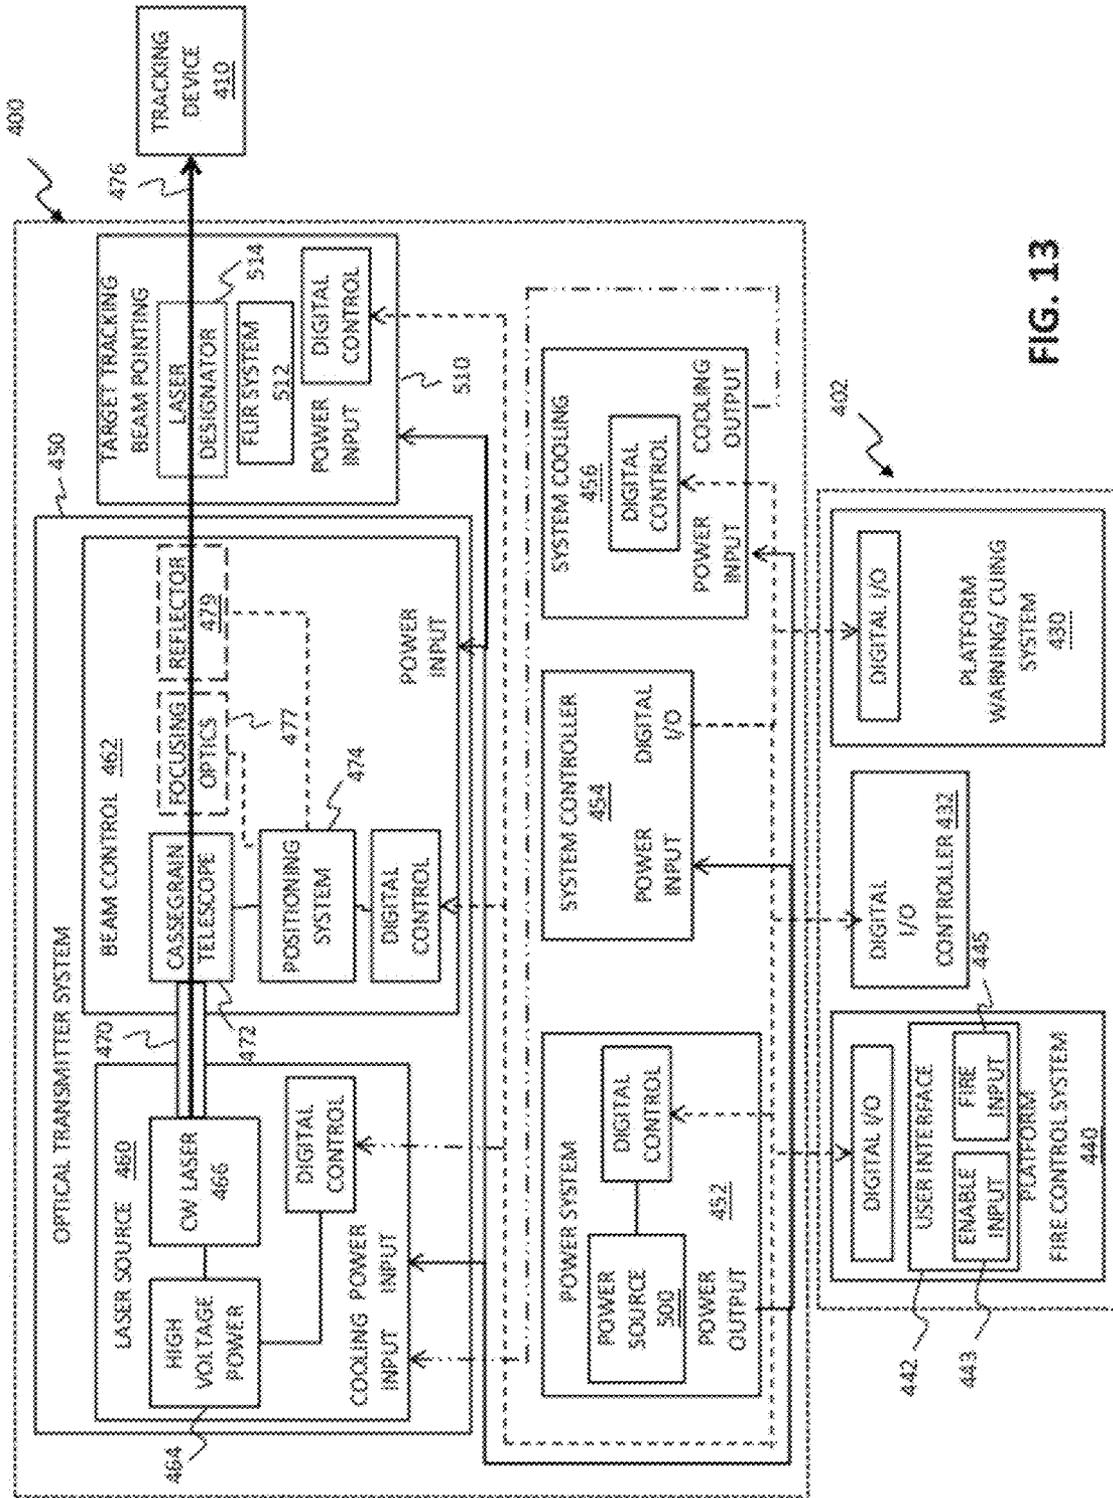


FIG. 13

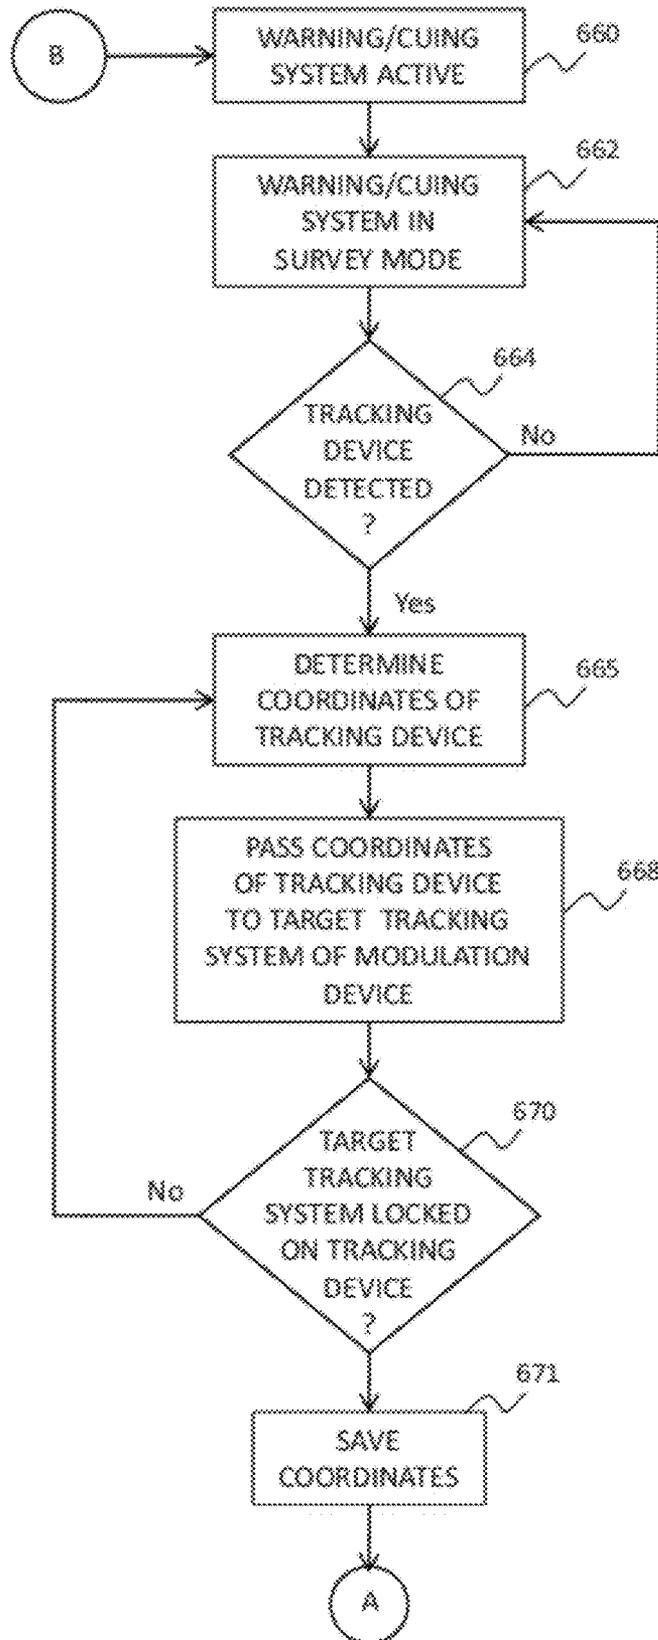


FIG. 14A

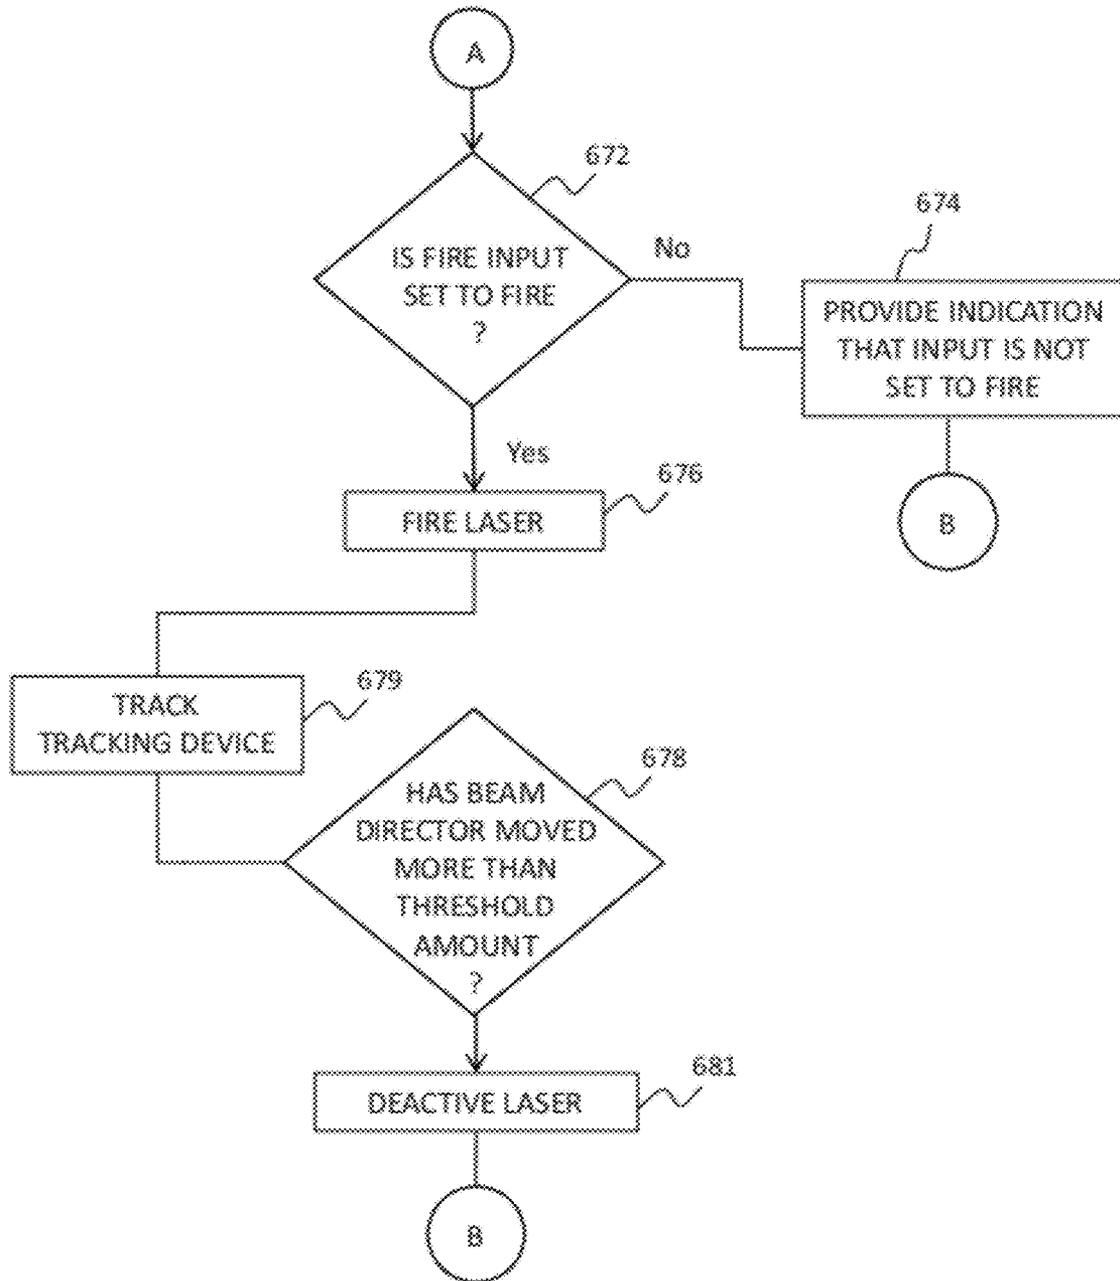


FIG. 14B

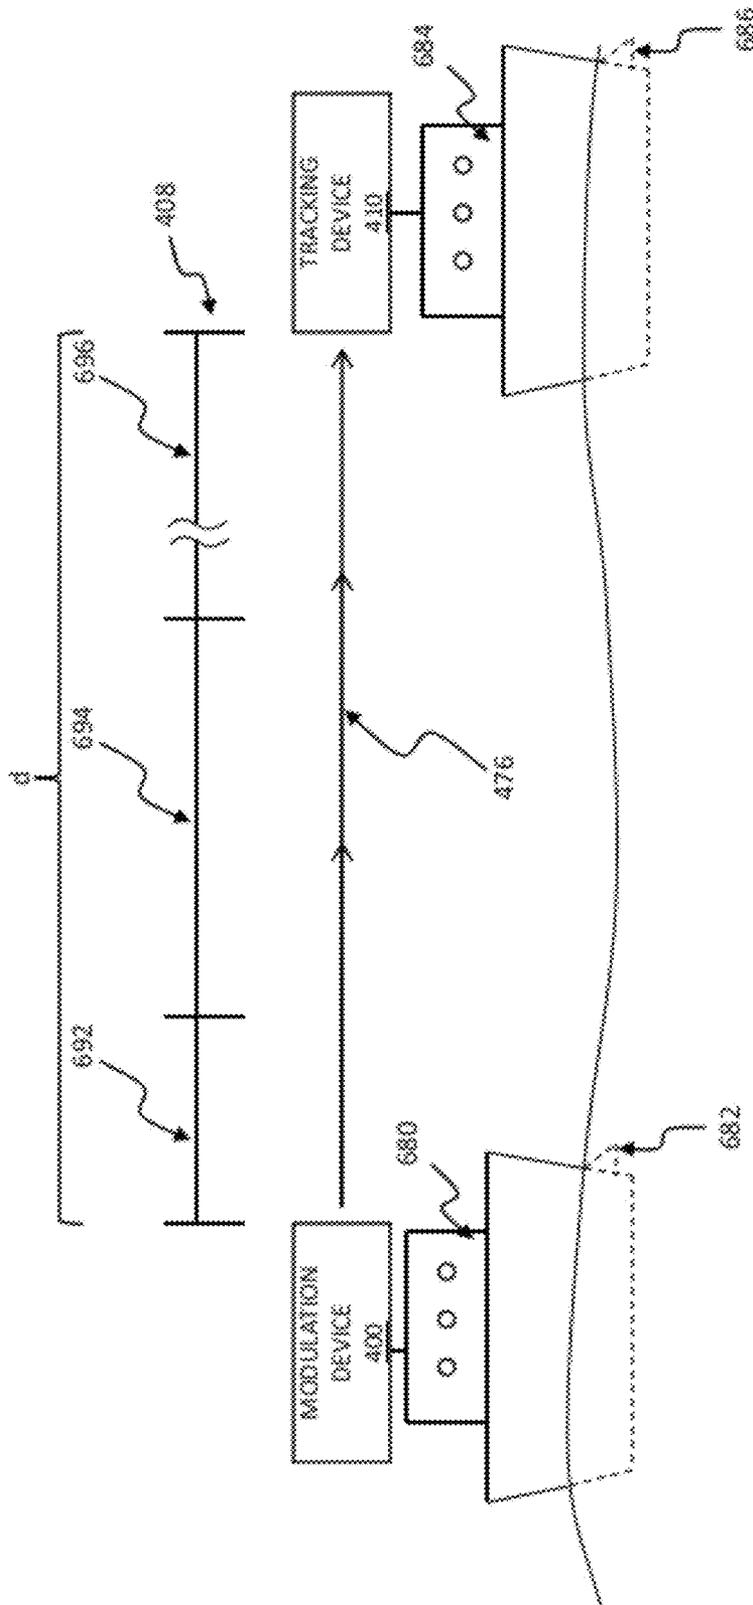


FIG. 15

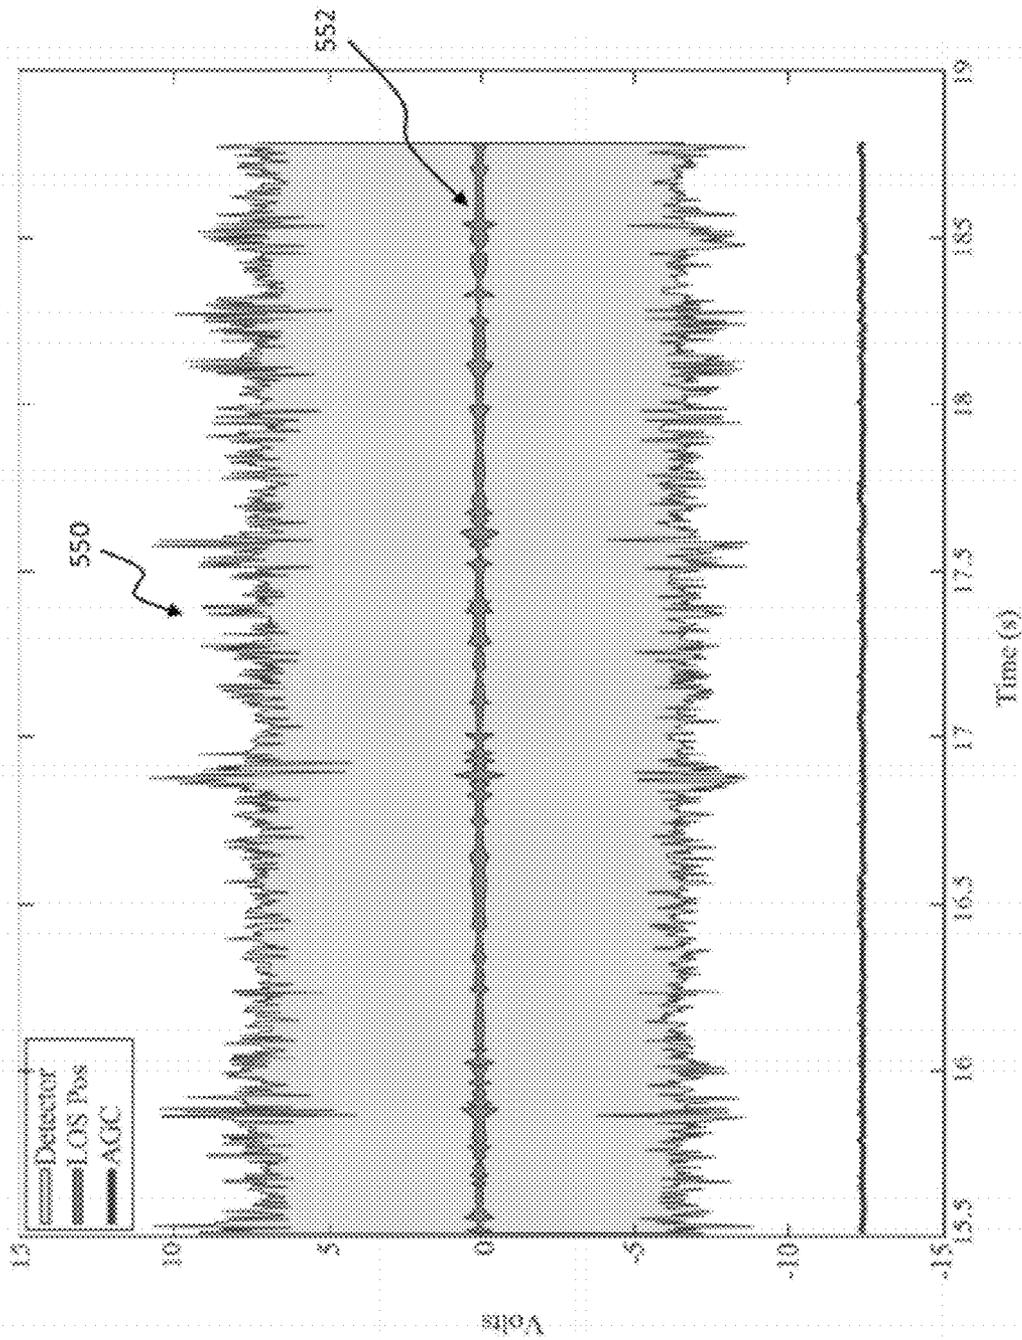


FIG. 16

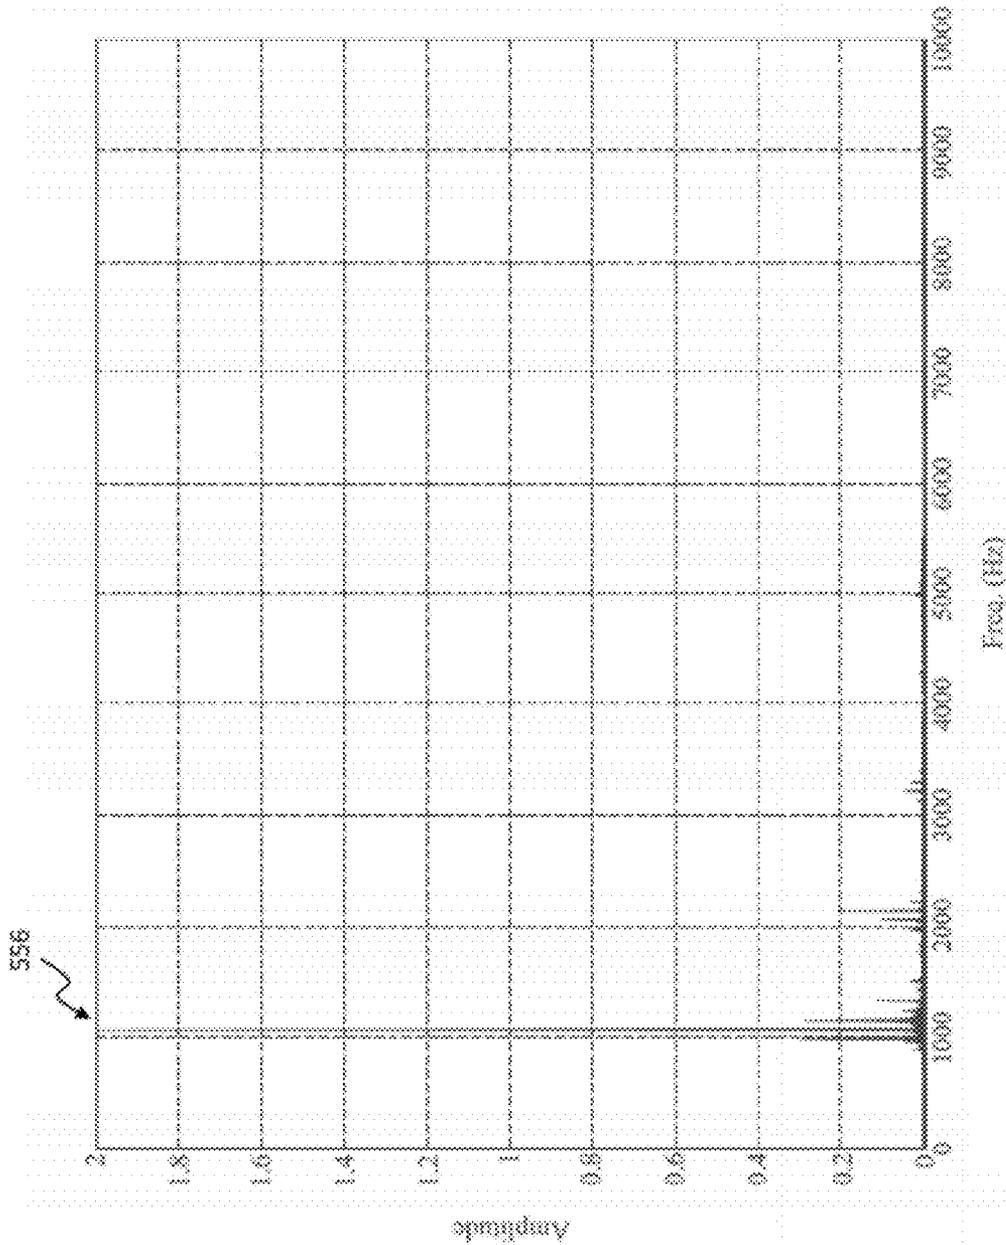


FIG. 17

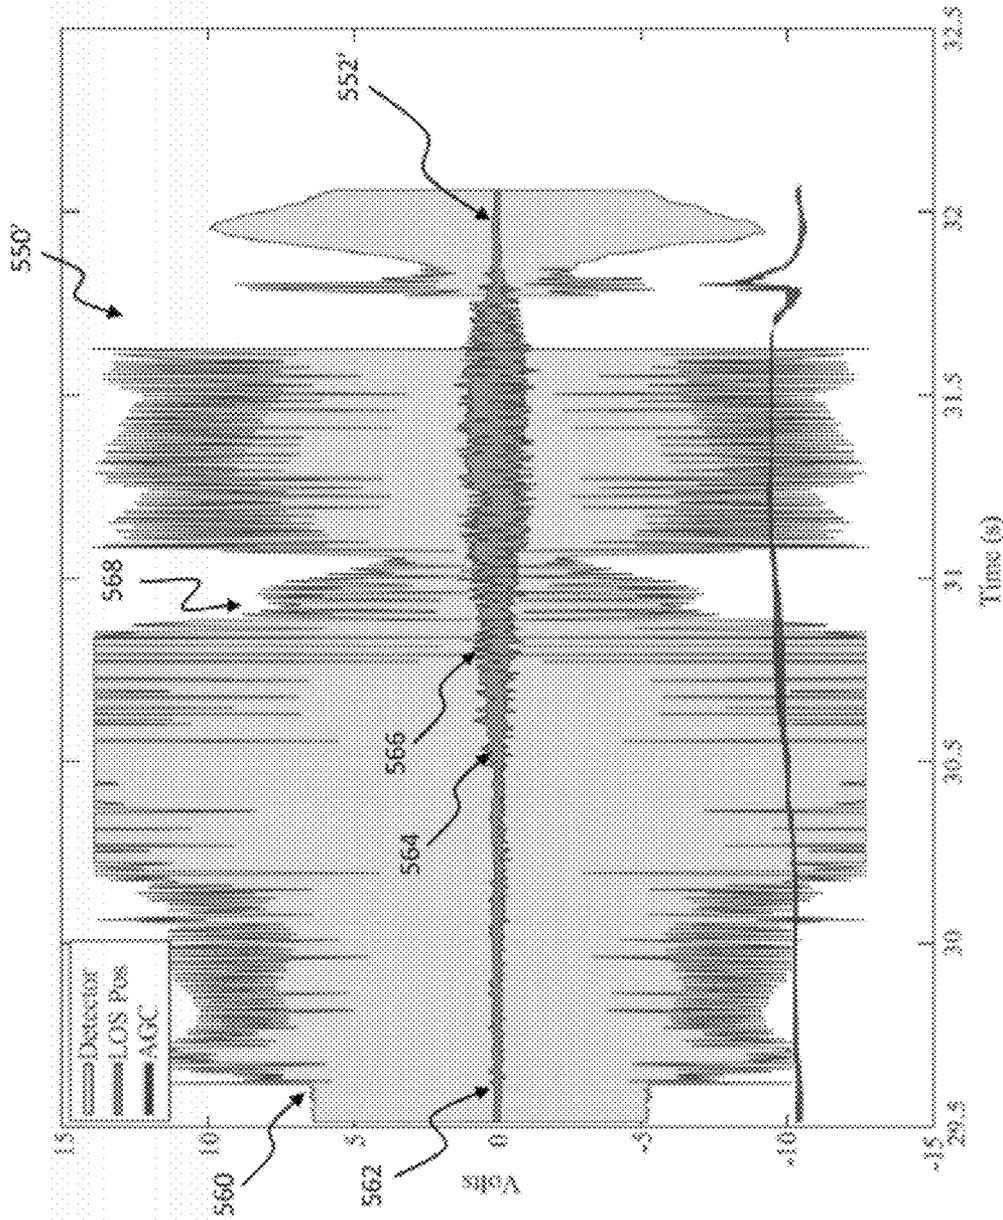


FIG. 18

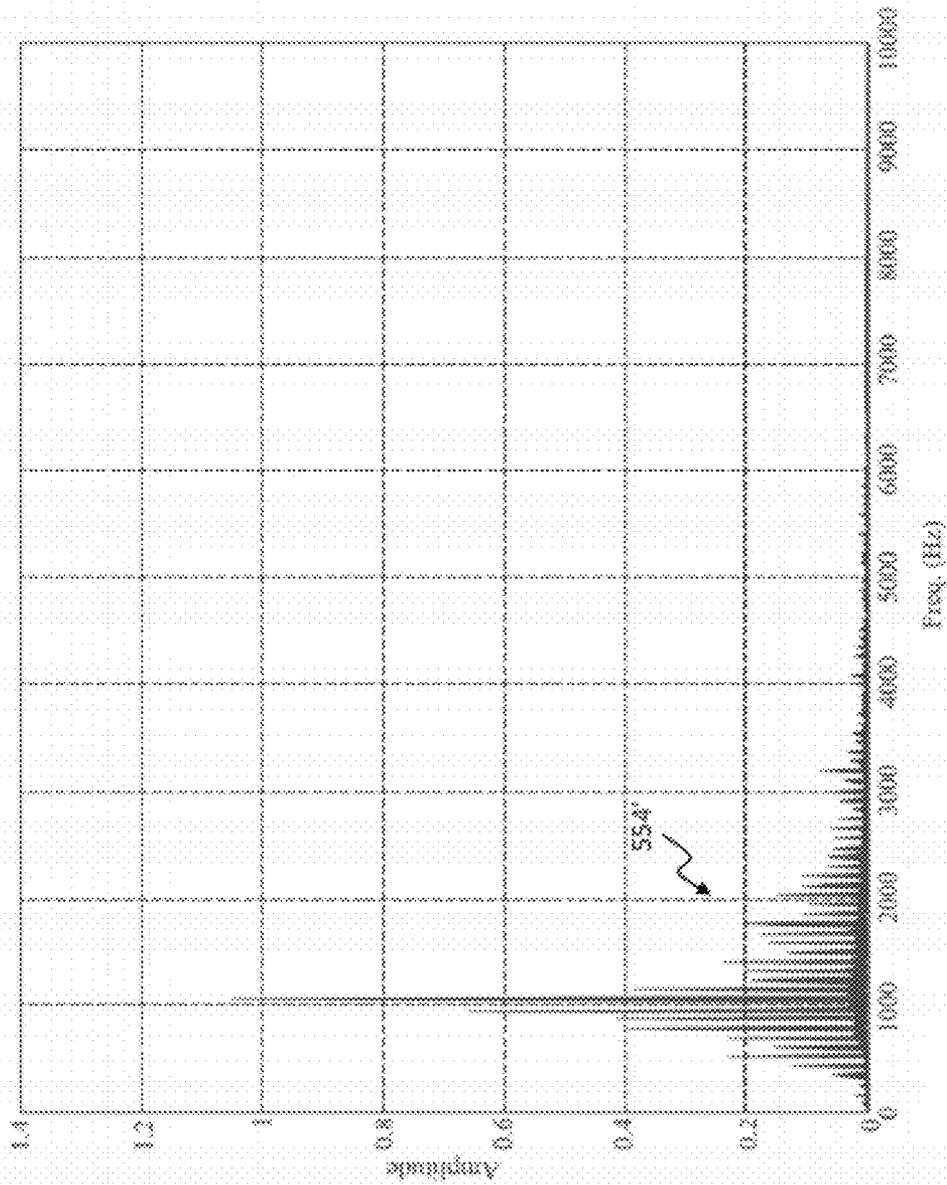


FIG. 19

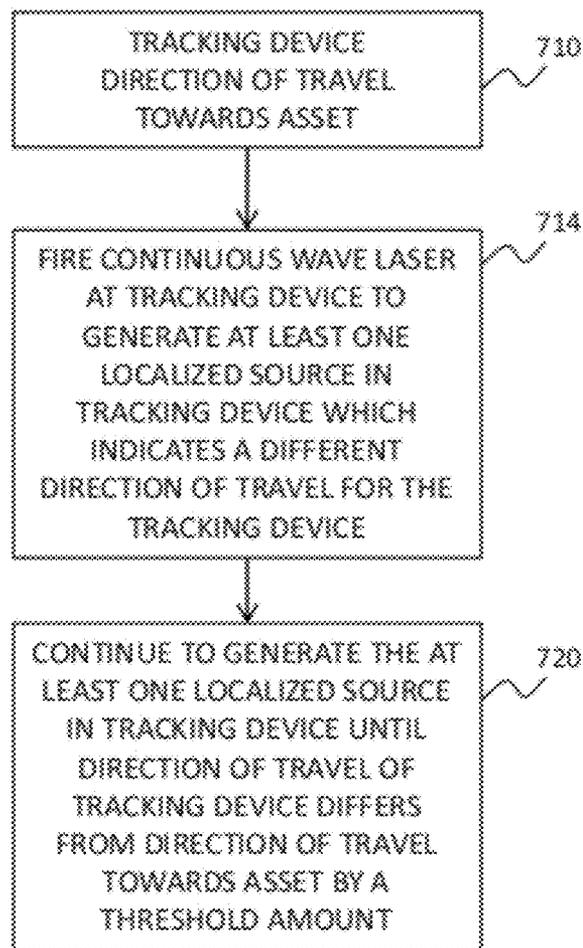
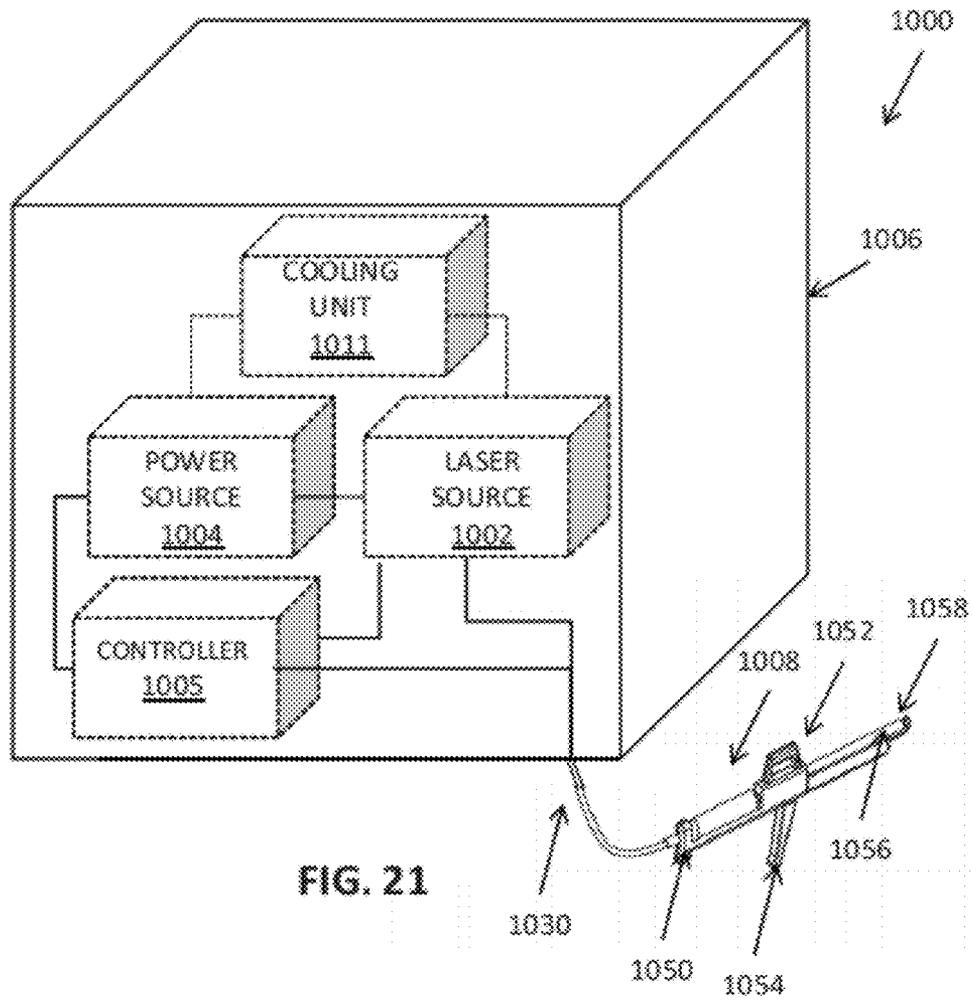


FIG. 20



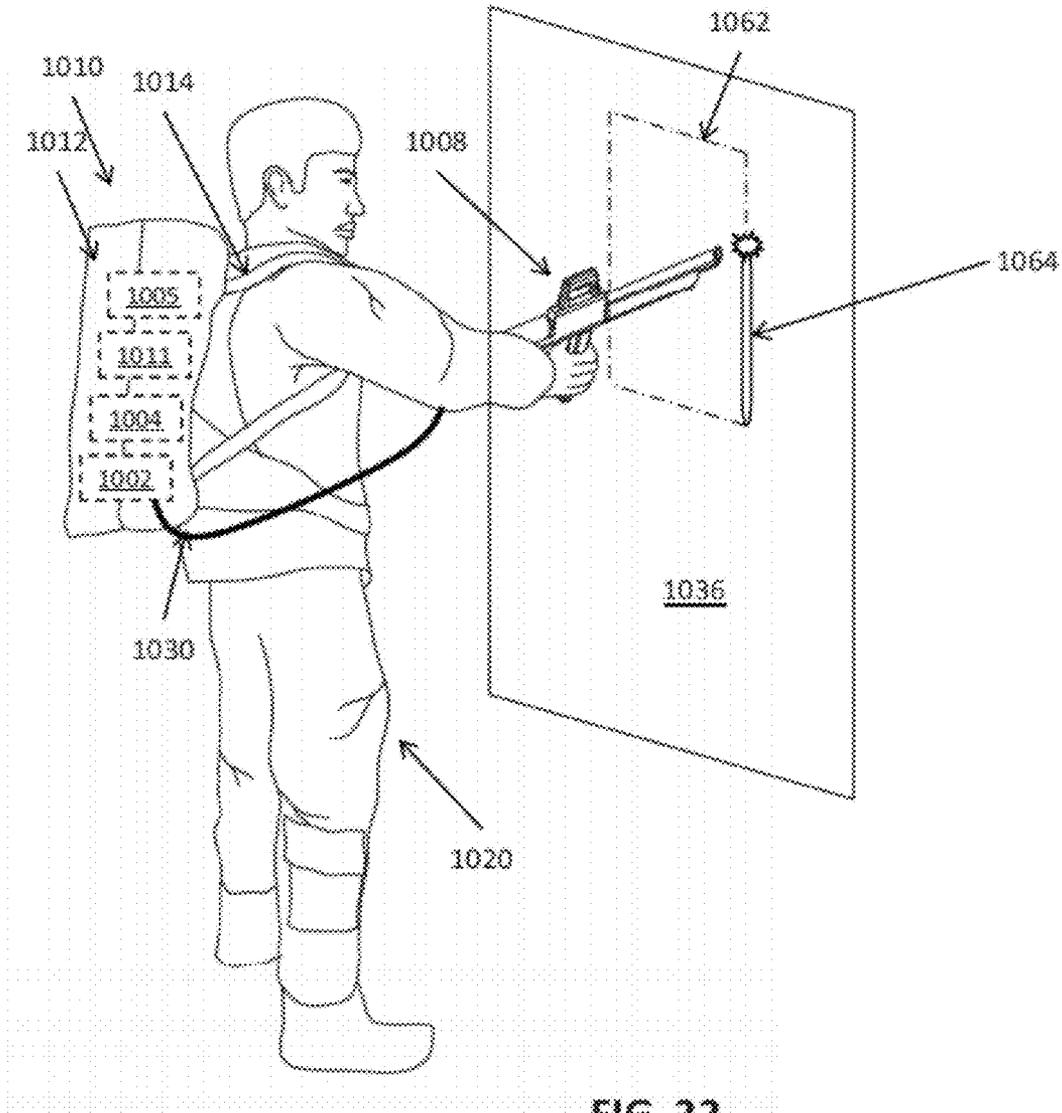


FIG. 22

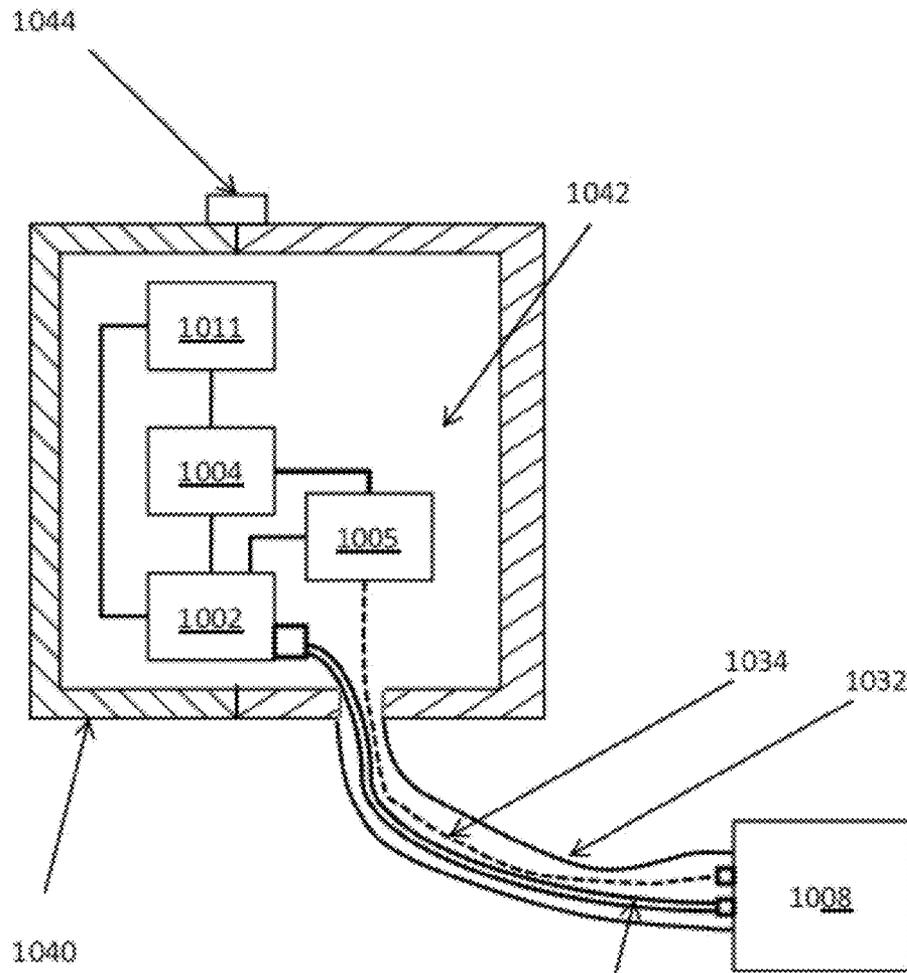


FIG. 22A

1030

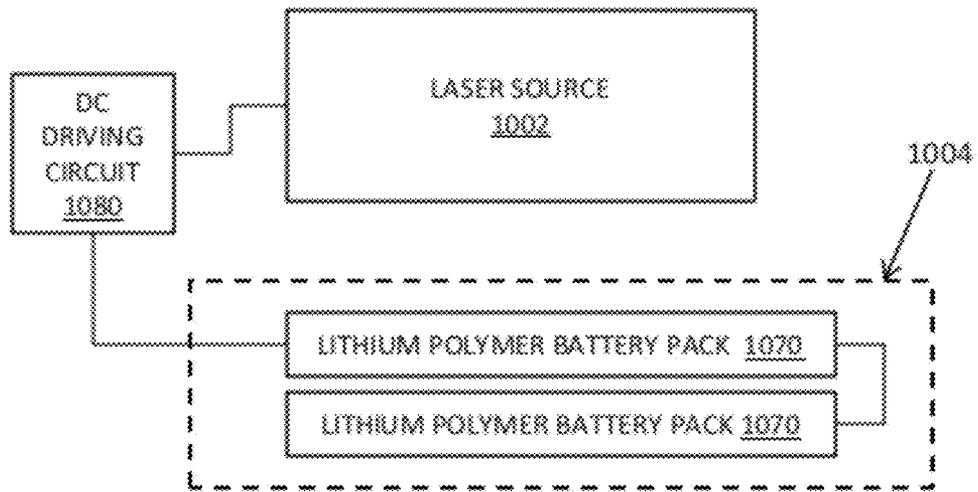


FIG. 23

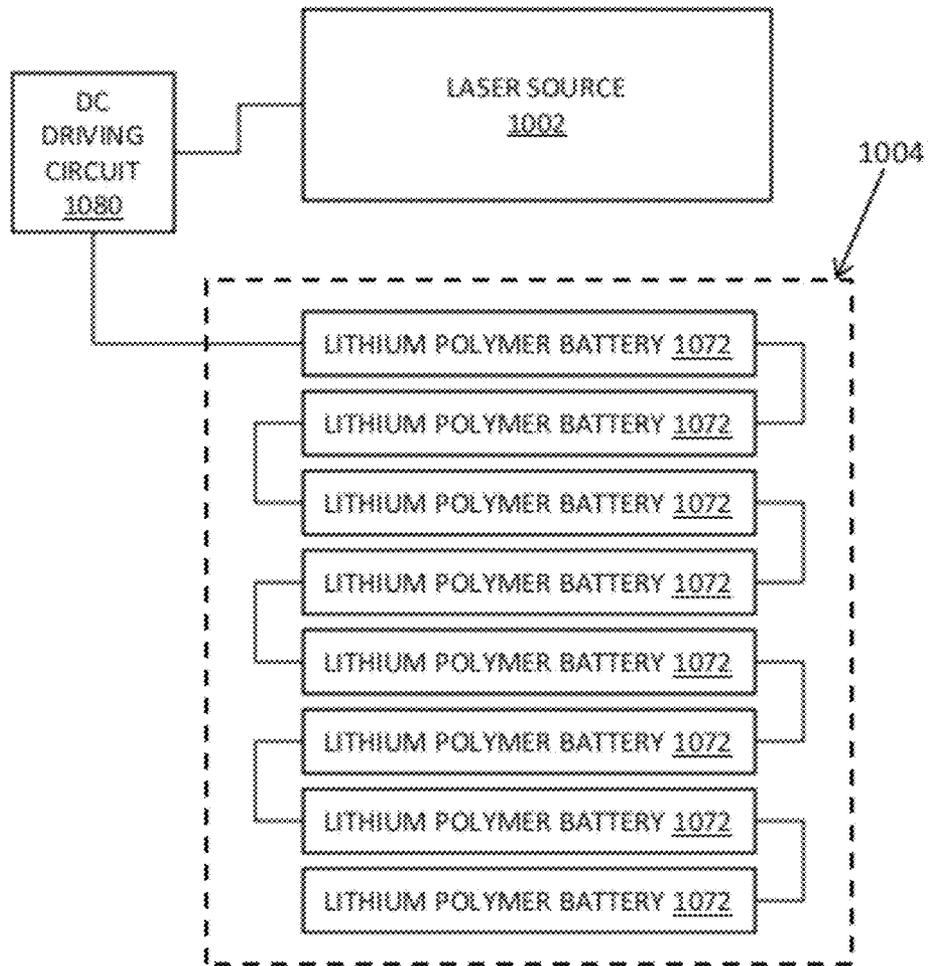
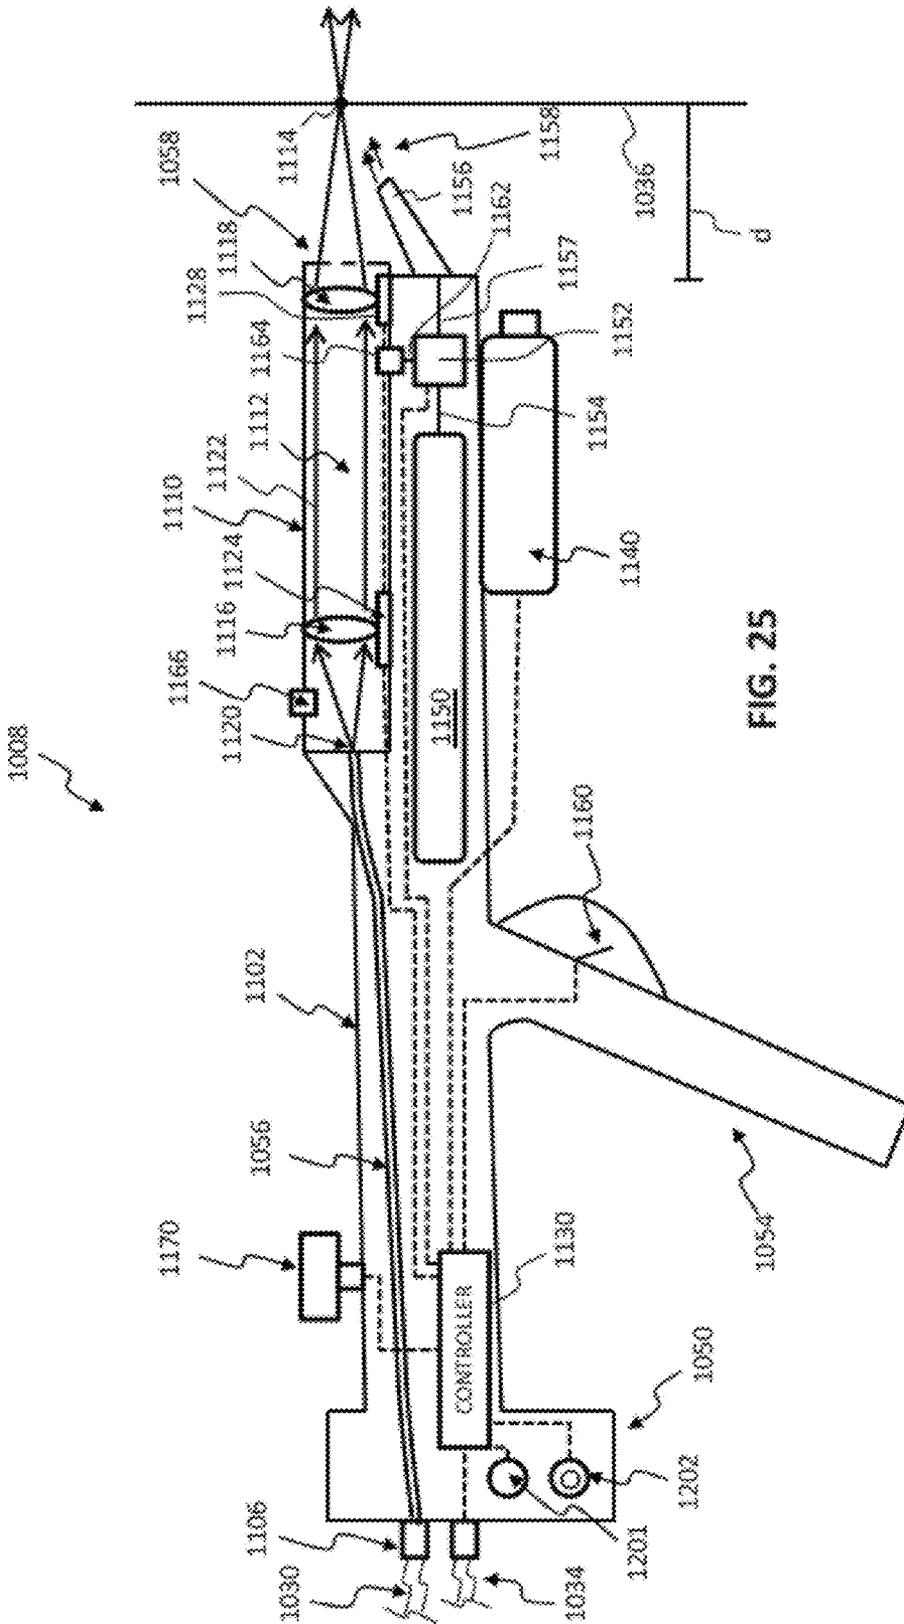


FIG. 24



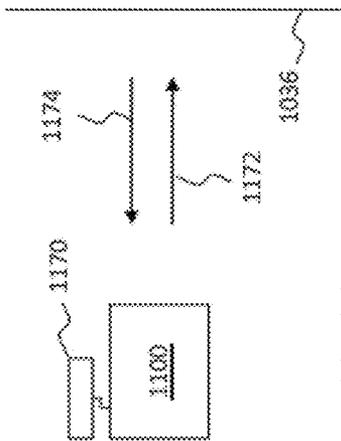


FIG. 26A

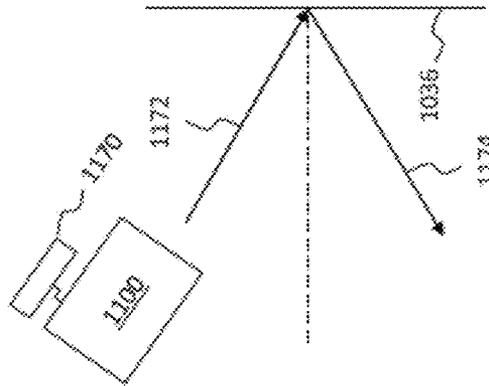


FIG. 26B

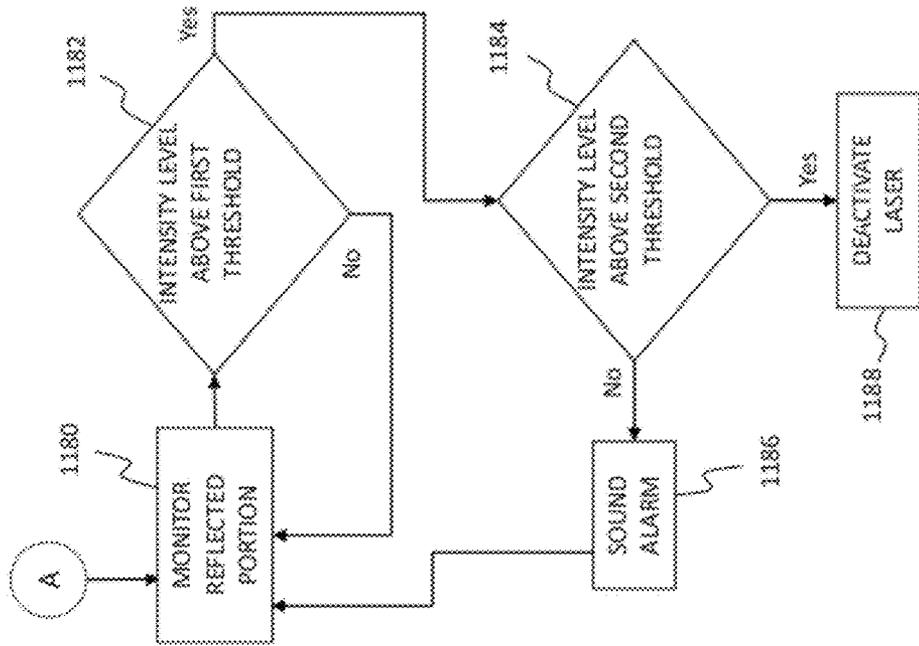


FIG. 27

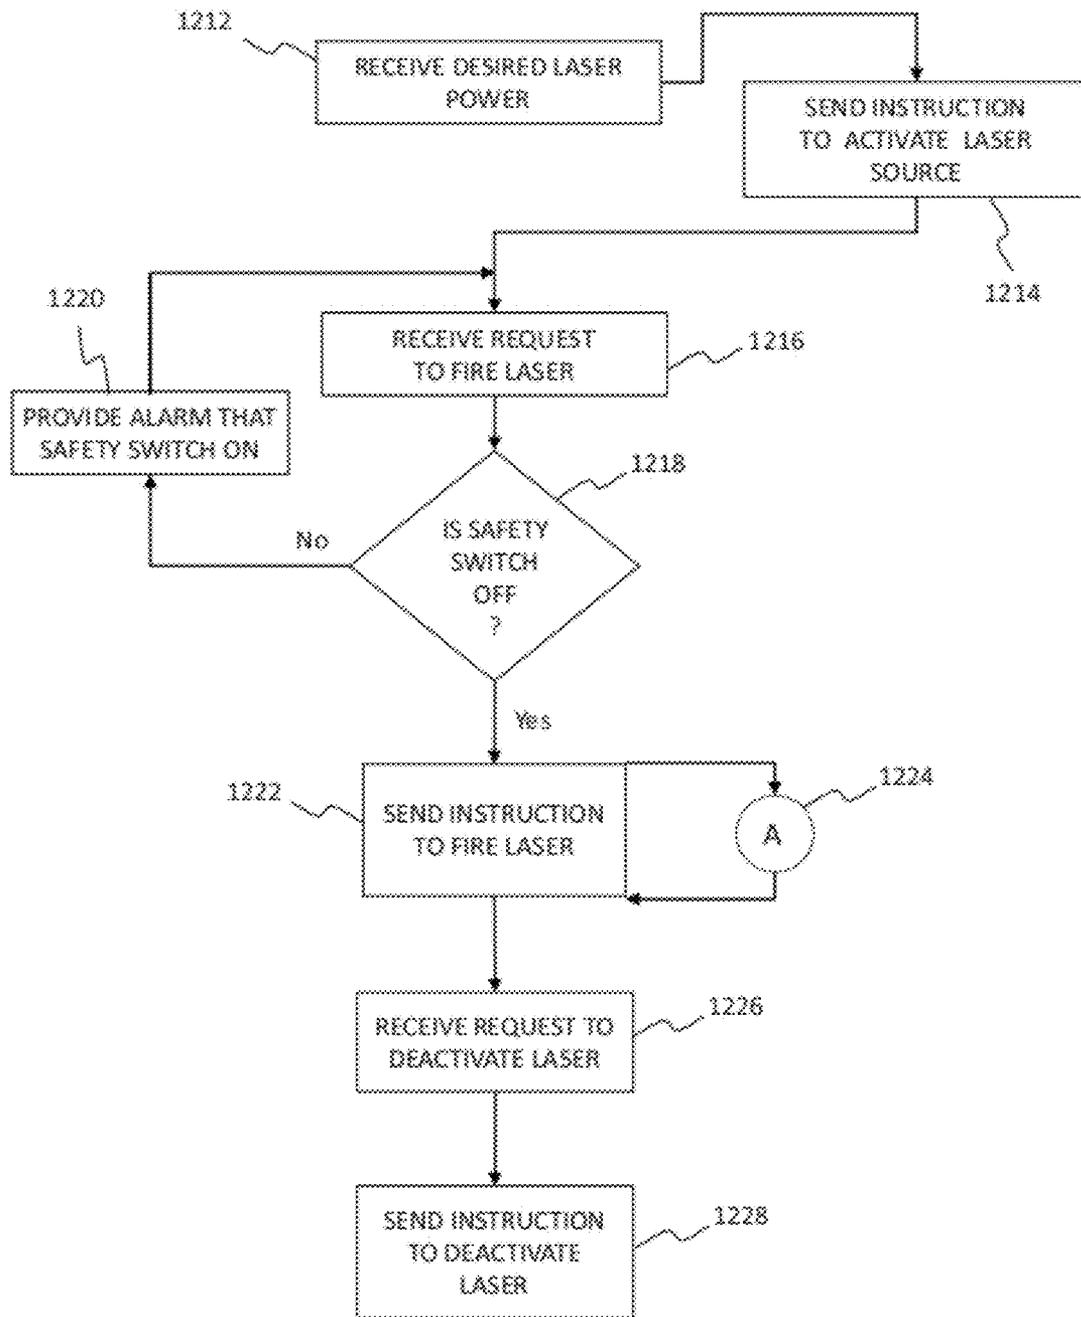


FIG. 28

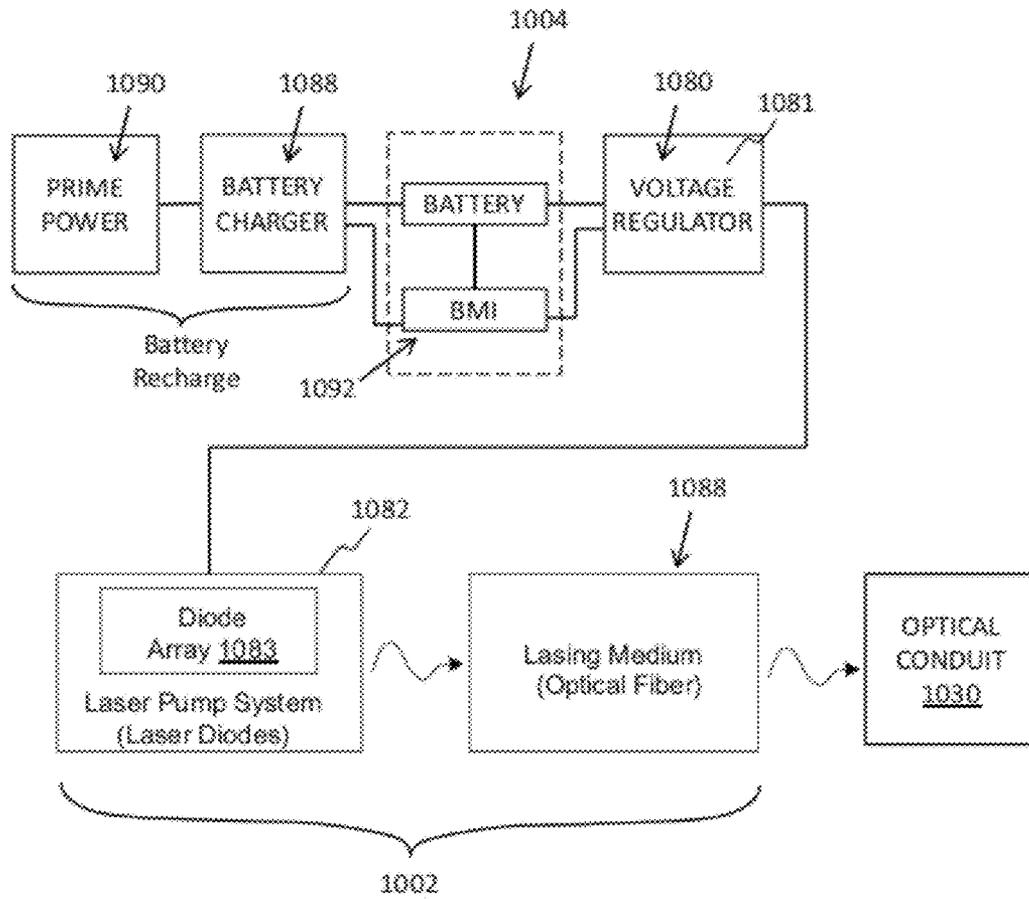


FIG. 29

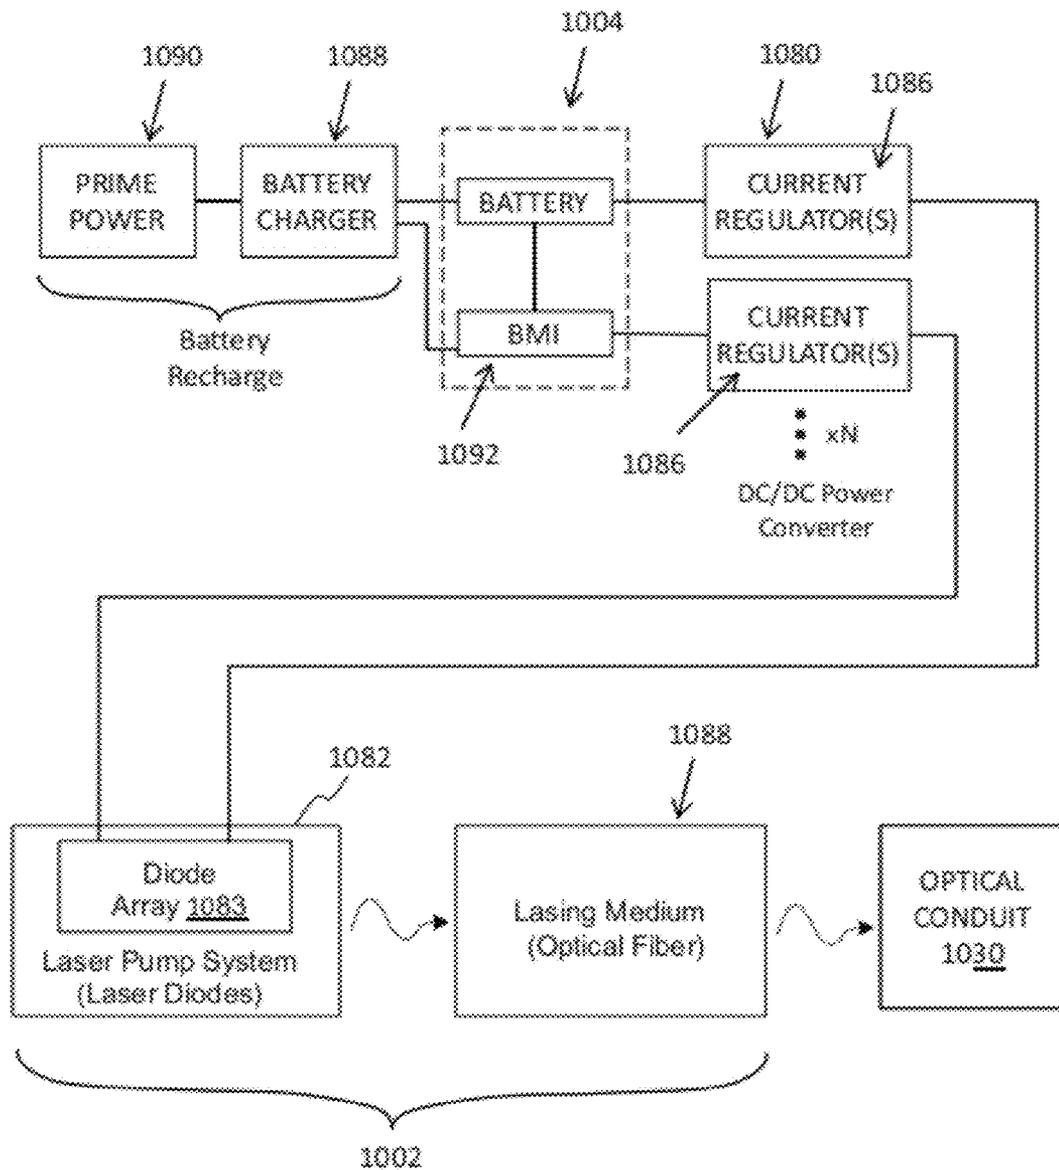


FIG. 30

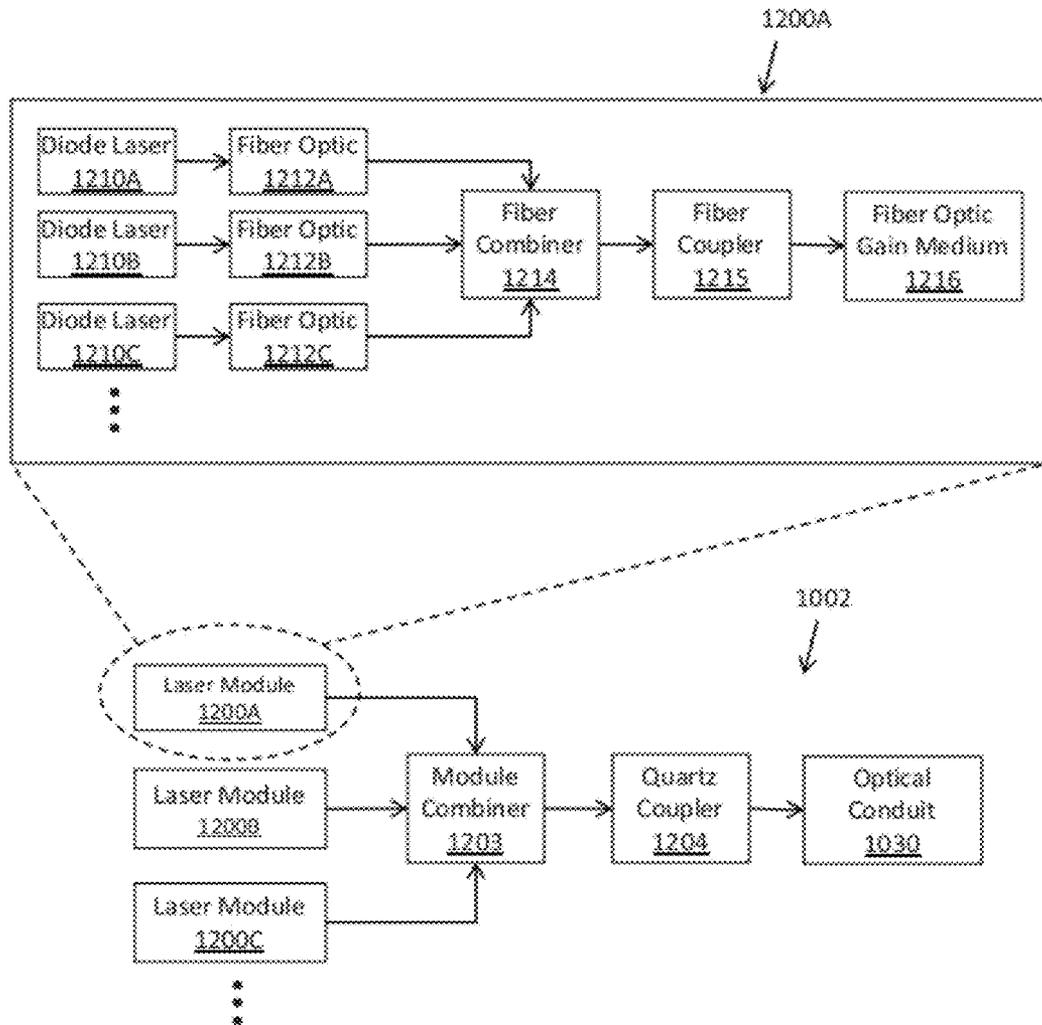


FIG. 31

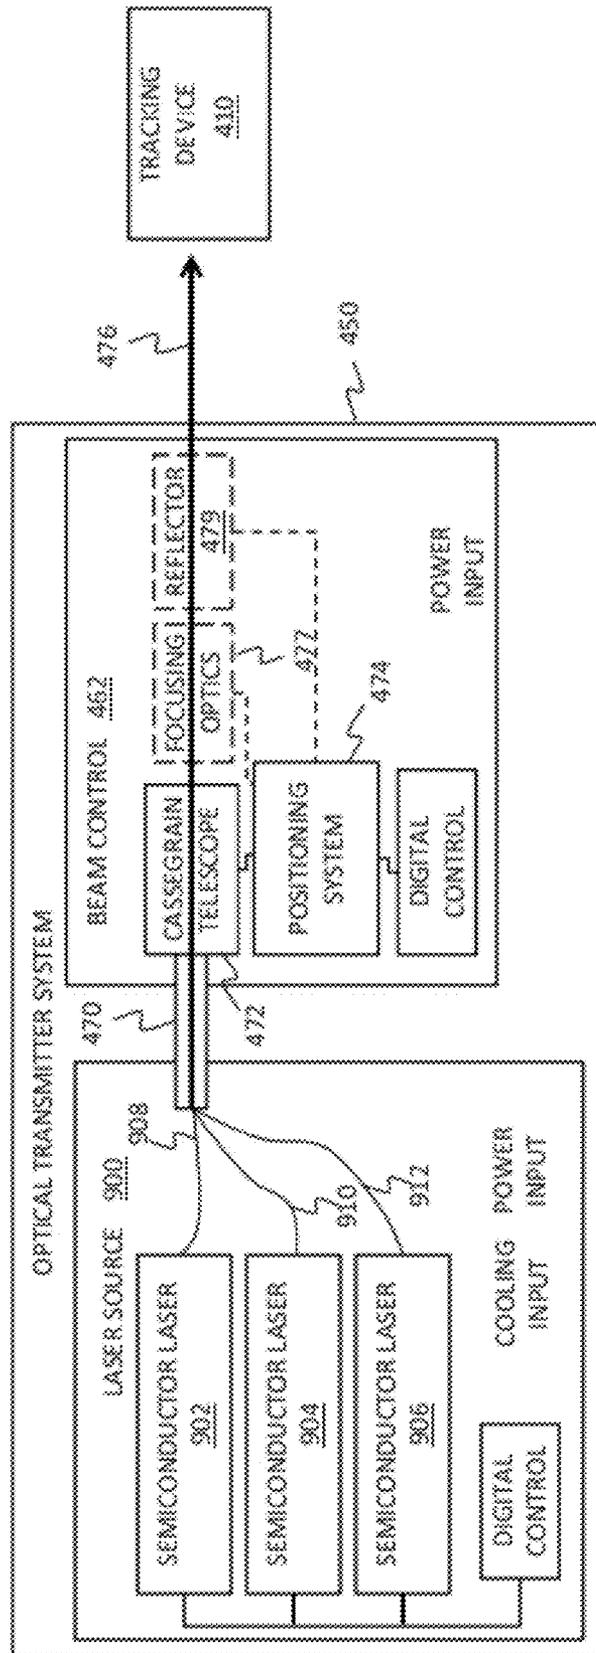


FIG. 32

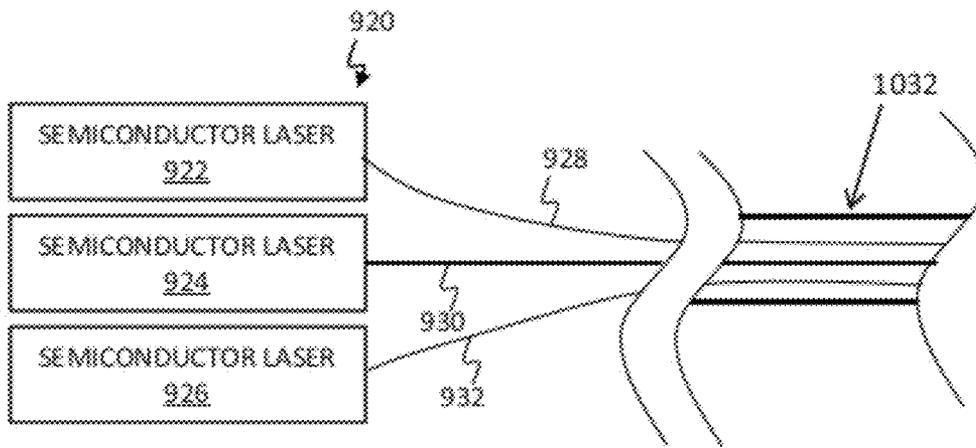


FIG. 33

1

SCENE ILLUMINATOR

RELATED APPLICATIONS

This application is a continuation-in-part of U.S. patent application Ser. No. 12/541,772, filed Aug. 14, 2009, now U.S. Pat. No. 8,305,252, and is a continuation-in-part of U.S. patent application Ser. No. 12/511,056, filed Jul. 28, 2009, now U.S. Pat. No. 8,436,276 the disclosures of which are expressly incorporated by reference herein.

U.S. patent application Ser. No. 12/778,870, filed May 12, 2010, titled MODULATION DEVICE FOR A MOBILE TRACKING DEVICE, now U.S. Pat. No. 8,367,991, and U.S. patent application Ser. No. 12/778,643, filed May 12, 2010, titled HIGH POWER LASER SYSTEM, now U.S. Pat. No. 8,420,977, are expressly incorporated by reference herein.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

The invention described herein was made in the performance of official duties by employees of the Department of the Navy and may be manufactured, used and licensed by or for the United States Government for any governmental purpose without payment of any royalties thereon.

BACKGROUND OF THE INVENTION

The present invention relates generally to devices for identifying objects within a scene and in particular identifying electro-optic devices within a scene.

In today's world more devices include electro-optic devices. These electro-optic devices are often used to image a scene or to identify objects within a scene. Exemplary electro-optic devices include still image cameras, video cameras, non-imaging tracking devices, and imaging tracking devices. These devices often times are used to image scenes which result in the invasion of privacy of individuals and companies and potential theft of information.

One area wherein theft of information through electro-optic devices is prevalent is in the movie industry. Individuals may attempt to record a movie being shown in a theater for later viewing or resale. Some movie theaters now include technology to disrupt these practices. For instance, infrared light projectors are directed towards the audience to disrupt the recording quality of unauthorized recordings.

However, unlike movie theaters wherein no recording devices should be recording a movie, in many situations it is desired to permit recording of some, but not all devices. Examples include movie sets, research facilities, military installations, airports, sporting events being taped for television, private residences, and more. By way of example, on a movie set, the production company wants to be able to record a scene, but would likely want to prevent unauthorized recordings by a third party. By way of another example, at a home, a parent may want to take pictures or video of a child's birthday party, but would likely want to prevent unauthorized pictures or video, such as by the paparazzi. By way of yet another example, in police or military actions, it may be desired to disable electro-optic devices within a region that are not associated with the police or military.

In all of these situations, the electro-optic devices within a region are split into at least two groups, authorized electro-optic devices and non-authorized electro-optic devices. A need exists for a system that is able to distinguish between

2

authorized electro-optic devices and non-authorized electro-optic devices and to take action relative to the non-authorized electro-optic devices.

SUMMARY OF THE INVENTION

In an exemplary embodiment of the present disclosure, a method of hampering unauthorized electro-optic (EO) devices is provided. The method comprising the steps of: interrogating an area with optical energy from at least one optical source; receiving a reflection from a first electro-optic device; storing optically detectable characteristics for a plurality of authorized electro-optic devices; comparing an optically detectable characteristic of the received reflection of the first electro-optic device to the stored optically detectable characteristics of authorized devices to determine if the first electro-optic device is an authorized device; and if the first electro-optic device is an unauthorized device, hampering the operation of the first electro-optic device.

In another exemplary embodiment of the present disclosure, an apparatus for interacting with an EO device in an environment is provided. The apparatus comprising at least one optical source emitting optical energy into the environment towards the EO device; at least one detector detecting the optical energy retro-reflected from the EO device; and a controller operatively coupled to the at least one optical source and the at least one detector. The controller analyzing the detected optical energy to determine whether the EO device is an authorized EO device or an unauthorized device.

In yet another exemplary embodiment of the present disclosure, an apparatus for interacting with an EO device is provided. The apparatus comprising: a body; at least one propulsion device supported by the body; a privacy device which monitors the environment surrounding the body for an unauthorized EO device; a controller operatively connected to the privacy device, the controller determining a presence of the unauthorized EO device in the environment surrounding the body based on information collected by the privacy device and a current location of the unauthorized EO device; and a modulation system which receives the current location of the unauthorized EO device from the controller, orients a tracking system of the modulation system based on the current location of the unauthorized EO device, detects the unauthorized EO device, updates the location of the unauthorized EO device, and directs a continuous beam of optical energy at the unauthorized EO device.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same become better understood by reference to the following detailed description when taken in conjunction with the accompanying drawings.

FIG. 1 is a representative view of a scene having a plurality of EO devices positioned therein;

FIGS. 2-2C are representative views of a privacy device which monitors the scene of FIG. 1 to determine the presence of unauthorized EO devices and to hamper their operation;

FIG. 3 is a representative view of an exemplary processing sequence of the privacy device of FIG. 2;

FIG. 4 is a representative view of a movie theater scene having a plurality of EO devices positioned therein;

FIG. 5 illustrates a representative view of a modulation device and associated asset;

FIG. 6 is a view of a representative asset;

FIG. 6A illustrates the representative asset of FIG. 6 with a mobile tracking device approaching the representative asset along a first direction and optical energy from the modulation device being directed at the mobile tracking device;

FIG. 6B illustrates the mobile tracking device changing its direction of travel to a second direction due to the optical energy directed from the modulation device at the mobile tracking device;

FIG. 6C illustrates the mobile tracking device changing its direction of travel to a third direction due to the optical energy directed from the modulation device at the mobile tracking device;

FIG. 6D illustrates the mobile tracking device changing its direction of travel to a fourth direction due to the optical energy directed from the modulation device at the mobile tracking device;

FIG. 7 illustrates an exemplary mobile tracking device;

FIG. 8 illustrates an exemplary laser source;

FIG. 9 illustrates a perspective view of a modulation device wherein portions of the housing are shown in phantom;

FIG. 10 illustrates a first arrangement of components of a power supply of the modulation device;

FIG. 11 illustrates a second arrangement of components of a power supply of the modulation device;

FIG. 12 illustrates a processing sequence for charging the battery source of the modulation device;

FIG. 13 illustrates a representative view of a modulation device and associated asset;

FIGS. 14A and 14B illustrate a processing sequence for engaging a mobile tracking device;

FIG. 15 illustrates a representative asset being tracked by a representative mobile tracking device;

FIGS. 16 and 17 represent the response characteristics of a mobile tracking device following an asset; and

FIGS. 18 and 19 represent the response characteristics of a mobile tracking device following an asset and being subsequently illuminated by a modulation device;

FIG. 20 illustrates a method of countering a mobile tracking device with a modulation device;

FIG. 21 is a representative view of a portable cutting device;

FIG. 22 shows the portable cutting device of FIG. 21 being used to breach a barrier;

FIG. 22A is a representative view of the cargo carrying portion of the backpack shown in FIG. 22;

FIG. 23 is a representative view of an exemplary portable battery power supply;

FIG. 24 is a representative view of an exemplary second portable battery power supply;

FIG. 25 is a representative view of a laser directing device of the portable cutting device of FIG. 22;

FIG. 26A illustrates a first positioning of the laser directing device relative to the barrier;

FIG. 26B illustrates a second positioning of the laser directing device relative to the barrier;

FIG. 27 illustrates a processing sequence of a controller of the portable cutting device;

FIG. 28 illustrates another processing sequence of the controller of the portable cutting device;

FIG. 29 illustrates a first arrangement of components of the portable cutting device;

FIG. 30 illustrates a second arrangement of components of the portable cutting device;

FIG. 31 illustrates an exemplary laser source;

FIG. 32 illustrates a representative view of a modulation device and associated asset; and

FIG. 33 a representative view of a portion of a portable cutting device.

Corresponding reference characters indicate corresponding parts throughout the several views. Although the drawings represent embodiments of various features and components according to the present disclosure, the drawings are not necessarily to scale and certain features may be exaggerated in order to better illustrate and explain the present disclosure. The exemplification set out herein illustrates embodiments of the invention, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

DETAILED DESCRIPTION OF THE DRAWINGS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings, which are described below. The embodiments disclosed below are not intended to be exhaustive or limit the invention to the precise form disclosed in the following detailed description. Rather, the embodiments are chosen and described so that others skilled in the art may utilize their teachings. It will be understood that no limitation of the scope of the invention is thereby intended.

The invention includes any alterations and further modifications in the illustrated devices and described methods and further applications of the principles of the invention which would normally occur to one skilled in the art to which the invention relates.

Referring to FIG. 1, a movie set 100 is shown. The set 100 includes a plurality of actors 102 which are being filmed by a first camera 104 and a second camera 106. First camera 104 is a stationary camera. Second camera 106 is a movable camera which is mounted to a platform 107 which moves the second camera 106 on a track 108 in directions 110 and 112. Both of first camera 104 and second camera 106 are owned by the movie company and intended to be filming the scene, in this case actors 102. Cameras 104 and 106 are referred to as authorized cameras because the entity producing the movie desires that these electro-optic devices ("EO devices") be able to record images regarding the scene. Exemplary EO devices include still image cameras, video cameras, non-imaging mobile tracking devices, imaging mobile tracking devices, binoculars, scopes, retro-reflective identification markers which can be attached to clothing or other articles, optical detection systems, and optical imaging systems. Exemplary EO devices may operate in one or more of the infrared band, the visible band, and the ultraviolet band.

In addition to authorized cameras 104 and 106, two unauthorized cameras 114 and 116 are shown. Camera 114 may be a still camera used by a paparazzi to obtain unauthorized photographs of one or more of the actors 102. Camera 116 is attached to a movable platform, illustratively an airplane 118.

Also, represented in FIG. 1 is a privacy device 150 which scans the scene to detect EO devices and to hamper the operation of unauthorized EO devices. Exemplary methods of hampering the operation of an unauthorized EO device including blinding the device, jamming the operation of the device, permanently disabling a portion of the device, and destroying the device. An EO device is blinded when its optical components are saturated.

Referring to FIG. 2, privacy device 150 includes one or more optical sources 152 and one or more detectors 154. In one embodiment, privacy device 150 includes a single optical source 152 and a single detector 154. In one embodiment, privacy device 150 includes multiple optical sources 152 and multiple detectors 154. In one example, each optical source

generates optical energy within a respective band permitting privacy device **150** to detect EO devices in one or more of multiple bands.

Each optical source **152** sends out an optical beam **156**. Reflected energy **158** from an EO device **200** in the environment is received by the respective detector **154**. The detector **154** receives the reflected energy **158** from the EO device **200**. Based on the received reflected energy **158**, a controller **164** of privacy device **150** decides whether the EO device **200** is an authorized EO device or not. Exemplary optical sources **152** are disclosed herein and in U.S. patent application Ser. No. 12/541,772, filed Aug. 14, 2009, now U.S. Pat. No. 8,305,252; U.S. patent application Ser. No. 12/511,056, filed Jul. 28, 2009; now U.S. Pat. No. 8,436,276, U.S. patent application Ser. No. 12/778,643, titled HIGH POWER LASER SYSTEM, filed May 12, 2010, now U.S. Pat. No. 8,420,977; and U.S. patent application Ser. No. 12/778,870, titled MODULATION DEVICE FOR A MOBILE TRACKING DEVICE, filed May 12, 2010, now U.S. Pat. No. 8,367,991, the disclosures of which are expressly incorporated by reference herein. In one embodiment, an exemplary optical source generates optical energy having a wavelength of at least about 1.5 microns.

In one embodiment, the optical sources **152** and detectors **154** are positioned within a housing **159** which is supported by a moveable support **160**. Controller **164** orients the direction that optical beam **156** is sent by adjusting the position of housing **159** through moveable support **160**. In one embodiment, moveable support **160** is a turret. Exemplary moveable supports, such as positioning systems, are disclosed herein and in U.S. patent application Ser. No. 12/541,772, filed Aug. 14, 2009, now U.S. Pat. No. 8,305,252, the disclosure of which is expressly incorporated by reference herein. In one embodiment, housing **159** is a handheld device and an operator moves housing **159** about to sweep an area with optical beam **156**. Exemplary handheld devices are disclosed in U.S. patent application Ser. No. 12/511,056, filed Jul. 28, 2009, now U.S. Pat. No. 8,436,276, the disclosure of which is expressly incorporated by reference herein.

Privacy device **150** further includes a controller **164** which analyzes the received reflected energy to determine whether the EO device **200** is an authorized device or an unauthorized device. In one embodiment, controller **164** has access to a memory **166** which includes a database **168** that includes optically detectable characteristics of authorized EO devices. Exemplary optically detectable characteristics include number of optical components in reflected energy, modulation of reflected energy, layout of detection components, and other suitable characteristics.

Related to the number of optical components, the number of retro reflections and their spacing may be indicative of the number of optical components in the imaging or detection system of the EO device **200**. In one example, the optical beam **156** is pulsed or chopped to better detect the spacing between retro reflections.

Related to the modulation of the reflected energy **158**, some EO devices **200** include chopper devices, such as reticules, which disrupt the propagation of optical energy. These chopper devices produce distinctive modulation patterns in reflected energy **158** which may be detected through an analysis of the Fourier spectrum of reflected energy **158**.

Related to the layout of detection components, many EO devices **200** include a multi-element detector. Exemplary multi-element detectors include CCD arrays and other types of detectors. The faces of these elements and the gaps therebetween provide a reflected image of multi-element detector. This reflected image may be characteristic of the type of

EO device. The reflected image may be compared to known characteristics by comparing the Fourier spectrum of the reflected image with known EO devices.

Referring to FIG. 2A, privacy device **150'** in one embodiment includes imaging optics **202** which shape the optical energy propagated from optical sources **152** into the environment. In one embodiment, imaging optics **202** include a beam expander which produces a generally collimated beam of optical energy having an enlarged cross-sectional area. In one embodiment, imaging optics **202** also excludes focusing optics to focus the optical energy produced by optical sources **152** onto imaging optics **202** or an associated asset. By focusing the optical energy the operation of EO device **200** may be hampered. In one embodiment, the power level of one or more of optical sources **152** is also raised to hamper the operation of EO device **200**.

In one example, EO device **200** is an infrared tracking device having a seeker head traveling in a first direction towards privacy device **150**. The increased power level of the optical source **152** is directed into a seeker head of the infrared tracking device to generate at least one localized source within the mobile tracking device and within a field of view of the infrared tracking device. This indicates a second direction of travel for the infrared tracking device. In one example, as the direction of travel of the infrared tracking device is changed, the orientation of the privacy device is also changed to continue to direct optical energy into the seeker head of the infrared tracking device. This again results in the generation of at least one localized source within the infrared tracking device and within the field of view of the infrared tracking device which indicates a third direction of travel for the infrared tracking device.

In addition, privacy device **150'** may include imaging optics **204** which image the received reflected energy **158** on detectors **154**. Privacy device **150'** may include one or more filters **206** which are configured to pass the optical energy of optical sources **152** while at least partially blocking optical energy at other wavelengths. This reduces the amount of energy that reaches detectors **154** from diffuse reflections as opposed to retro-reflections.

Privacy device **150'** may also include a vision system **210** which provides an image of the environment to controller **164**. In one embodiment, controller **164** displays the image **214** of the environment on a display **212**. In one embodiment, controller **164** further displays an icon **216** on image **214** to indicate the location of EO device **200**.

In one embodiment, the stored optically detectable characteristics for authorized EO devices are one or more identification markers in a Fourier transform of reflected energy. When reflected optical energy is received by detectors **154**, controller **164** performs a fast Fourier transform of the received information and compares one or more portions of the fast Fourier transform to the characteristics stored in database **168**. Based on the correlation between the fast Fourier transform of the received reflected optical energy and one or more of the stored characteristics, the detected EO device may be classified as either an authorized EO device (match) or an unauthorized EO device (no match).

Referring to FIG. 3, an exemplary processing sequence of controller **164** is illustrated. Optically detectable characteristics of authorized EO devices are stored in a database **168** accessible by controller **164**, as represented by block **170**. These values may be downloaded through a wired or wireless connection to a remote computer (not shown). Controller **164** interrogates the environment with optical sources **152** to detect the presence of an EO device **200**, as represented by block **172**. If an EO device **200** is present, one of detectors **154**

receives a return reflection from the optics of the EO device, as represented by block 174. This return reflection from the EO device 200 is compared to the optically detectable characteristics stored in database 168, as represented by block 176.

If the EO device 200 is an unauthorized device, then controller 164 raises the power level of at least one of optical sources 152 to hamper the operation of EO device 200 by one or more of altering the direction of the EO device (in the case that the EO device 200 is an IR tracking device), blinding the EO device, or destroying the EO device, as represented by block 178. Referring to FIG. 2B, in one embodiment controller 164 uses another optical source 220 to hamper the operation of EO device 200. Exemplary systems for hampering the operation of EO devices are disclosed herein and in U.S. patent application Ser. No. 12/541,772, filed Aug. 14, 2009, now U.S. Pat. No. 8,305,252; U.S. patent application Ser. No. 12/511,056, filed Jul. 28, 2009; now U.S. Pat. No. 8,436,276; and U.S. patent application Ser. No. 12/778,643, titled HIGH POWER LASER SYSTEM, filed May 12, 2010, now U.S. Pat. No. 8,420,977, the disclosures of which are expressly incorporated by reference herein. In one embodiment, privacy device 150 serves as the warning/cuing system or vision system for the various systems disclosed herein and in U.S. patent application Ser. No. 12/541,772, filed Aug. 14, 2009, now U.S. Pat. No. 8,305,252; U.S. patent application Ser. No. 12/778,643, titled HIGH POWER LASER SYSTEM, filed May 12, 2010, now U.S. Pat. No. 8,420,977; and U.S. patent application Ser. No. 12/778,870, titled MODULATION DEVICE FOR A MOBILE TRACKING DEVICE, filed May 12, 2010, now U.S. Pat. No. 8,367,991, the disclosures of which are expressly incorporated by reference herein.

The optical sources 152 may also be used to illuminate a region so that a two-dimensional bar code or other identification carried by an article may be imaged by detector 154 and compared to a database of authorized articles.

Referring to FIG. 2C, in one embodiment, privacy device 150 includes a transceiver 230 which sends out an encrypted message which is received by a transceiver 232 of an authorized EO device 240. In one embodiment, the encrypted message is a public key which is readable by a controller of the authorized EO device 240. The authorized EO device 240 responds with a second encrypted message that is received by transceiver 230 of privacy device 150. In one embodiment, the second encrypted message is a private key which is sent in response to the public key and which is readable by controller 164 of privacy device 150. In one embodiment, transceiver 230 and transceiver 232 each include spatial light modulators which generate the respective signals and detectors which detect the respective signals.

In one embodiment, privacy device 150 once an unauthorized EO device 200 is detected, broadcasts an encrypted message with transceiver 230 to warn all authorized EO devices 240 that privacy device 150 is about to hamper the operation of an unauthorized EO device 200. Authorized EO devices 240 receives the message with transceiver 232 and take action to protect their respective electro-optic components. Exemplary actions include closing a shutter, altering an orientation of the authorized EO device 240, and other suitable actions to limit the amount of optical energy which is received by the respective optical system.

Referring to FIG. 4, an exemplary environment for privacy device 150 is shown. In FIG. 4, a movie theater 300 is represented. Movie theater 300 includes a camera 302 which projects the movie on a screen 304 for viewing by an audience seated in seats 306. Privacy device 150 scans the movie theater 300 for EO devices. Privacy device 150 receives a retro-

reflection from camera 302 and recognizes it as an authorized EO device. Another EO device 320, such as a portable video camera, also provides a retro-reflection. Privacy device 150 does not recognize EO device 320 as an authorized EO device. In one embodiment, privacy device 150 hampers the operation of EO device 320. In one embodiment, privacy device 150 provides location information concerning EO device 320 to theater personnel who remove the user of the EO device 320 from the theater.

The privacy device may be incorporated into or used in conjunction with modulation devices which may be implemented to protect aircraft, such as commercial airlines and military aircraft or other types of assets. Exemplary assets include moveable assets, such as aircraft, ships, buses, or trucks, or land based assets, such as an airport, factory, building, or facility. Exemplary modulation devices include countermeasure devices.

Referring to FIG. 5, a modulation device 400 is shown. Modulation device 400 is coupled to an asset 402. For purposes of discussion, asset 402 is considered to be an airplane, such as the airplane designated 402 in FIG. 6. However, the present disclosure is contemplated for use with a multitude of different assets. Airplane 402 includes a body or fuselage 404, a pair of main wings 405, tail wings 406, and a plurality of propulsion devices 408. Exemplary propulsion devices include jet engines, internal combustion engines with associated propellers, and any other suitable engine arrangement.

Referring to FIG. 7, components of a mobile tracking device 410 are shown. Mobile tracking device 410 includes a propulsion system 412 which provides power to propel mobile tracking device 410. Exemplary propulsion systems include solid fuel rockets, engines, and any other suitable devices for providing power to mobile tracking device 410. Mobile tracking device 410 also includes a guidance system 414 which controls the direction of travel of mobile tracking device 410. Exemplary guidance system components include wings for an airborne mobile tracking device 410, a rudder for a marine mobile tracking device 410, and ground engaging members for a land based mobile tracking device 410. The guidance system 414 steers mobile tracking device 410 to change a direction of travel of mobile tracking device 410. Exemplary airborne tracking devices include rockets, airplanes, and other flying devices. Exemplary marine tracking devices include boats (see FIG. 15), submersible devices, and other marine devices. Exemplary land based tracking devices include wheeled devices, tracked devices, and other suitable land based devices.

Mobile tracking device 410 includes a controller 416 which controls the operation of propulsion system 412 and guidance system 414. Mobile tracking device 410 also includes a gimbaled seeker head 415 which is able to move independent of the remainder of mobile tracking device 410. Seeker head 415 supports controller 416, a detector 418, telescope 420, a reticule 422, and optics 424.

In operation, electromagnetic radiation 426 from the environment enters an optical window 428 of mobile tracking device 410. Optical window 428 may be a dome. Optical window 428 may be selected to only pass electromagnetic radiation 426 within a certain wavelength band. For instance, in the case of an infrared mobile tracking device 410, optical window 428 may only pass electromagnetic radiation 426 within the infrared spectrum or a portion of the infrared spectrum. In other embodiments, a separate filter 425 is included somewhere within the optical setup of mobile tracking device 410 to limit the range of wavelengths of electromagnetic radiation 426 passed on to detector 418. Filter 425 is shown between optical window 428 and telescope 420.

However, filter 425 may be positioned anywhere between optical window 428 and detector 418.

The electromagnetic radiation 426 is received by telescope 420. Telescope 420 includes a primary mirror 421 which focuses the electromagnetic radiation 426 towards a secondary mirror 423. Secondary mirror 423 in turn focuses the electromagnetic radiation 426 towards reticule 422. Reticule 422 spins to provide a modulated signal of the electromagnetic radiation. Optics 424 receives and focus the modulated signal of the electromagnetic radiation 426 passing through reticule 422 onto detector 418 which is a non-imaging detector.

Controller 416 receives input from detector 418 which is used by controller 416 to determine the location the brightest object in the environment, typically asset 402. The modulated signal allows controller 416 to discriminate between background electromagnetic radiation and the radiation of asset 402, as well as, determine the location of asset 402 relative to a direction of travel of mobile tracking device 410. Based on this input from detector 418, controller 416 determines a desired direction of travel for mobile tracking device 410 which corresponds to tracking device 410 heading towards asset 402. Seeker head 415 is adjusted to center the brightest object in the environment so that seeker head 415 is pointed directly at the brightest object. Controller 416 provides this adjustment of seeker head 415 (from its intended orientation in line with the direction of travel of mobile tracking device 410) to guidance system 414 as error signal 429. Guidance system 414 uses this error signal 429 to alter the direction of travel of mobile tracking device 410. Over time, if mobile tracking device 410 is tracking asset 402 mobile tracking device 410 will be pointed at asset 402 and seeker head 415 generally produces a small error signal which is indicative of mobile tracking device 410 being aligned to intercept asset 402.

In the embodiment illustrated in FIG. 7, mobile tracking device 410 includes a spinning reticule 422. In another embodiment, mobile tracking device 410 does not include reticule 422 but rather secondary mirror 423 is tilted and telescope 420 is spun to produce a signal for controller 416. In one embodiment, detector 418 is an imaging detector and controller 416 processes the images from detector 418 to determine the location of asset 402.

Returning to FIG. 6, airplane 402 includes warning/cuing system 430 which detects when a mobile tracking device 410 has been launched and/or is tracking airplane 402. Warning/cuing system 430 includes sensor modules 431 which monitor the environment around airplane 402. Illustratively, four sensor modules 431A-D are shown. Depending on the asset 402 being protected, fewer or additional sensor modules 431 may be used. In one embodiment, sensor modules 431 include focal plane array sensors with wide field of views that continuously survey the environment for mobile tracking devices 410. In one embodiment, warning/cuing system 430 looks for a characteristic signal that indicates the launch of an airborne mobile tracking device 410. In the case of airborne mobile tracking device 410, the mobile tracking device 410 has a characteristic infrared and ultraviolet signature which warning/cuing system 430 recognizes as an airborne mobile tracking device 410.

Exemplary warning/cuing systems are disclosed in U.S. patent application Ser. No. 12/541,772, filed Aug. 14, 2009, the disclosure of which is expressly incorporated by reference herein. As explained herein, warning/cuing system 430 communicates with modulation device 400. Modulation device 400, in turn, provides optical energy from a continuous wave laser to redirect mobile tracking device 410 from tracking the

path of asset 402 or to disable mobile tracking device 410. In one embodiment, warning/cuing system 430 is provided as part of modulation device 400 instead of as a separate component of airplane 402.

Airplane 402 further includes a fire control system 440. Fire control system 440 interprets information provided by warning/cuing system 430 and provides a user interface 442 through which the operator of asset 402 activates modulation device 400. In one embodiment, user interface 442 includes a user input 443 to enable modulation device 400 and a user input 445 to permit modulation device 400 to fire. In one embodiment, modulation device 400 is automatically activated when asset 402 is moving. Exemplary inputs include switches, buttons, and other suitable types of user inputs.

Returning to FIG. 5, modulation device 400 is represented. Modulation device 400 includes an optical transmitter system 450, a power system 452, a system controller 454, and a cooling system 456. Each of optical transmitter system 450, power system 452, and cooling system 456 are coupled to system controller 454. System controller 454 receives input from and provides instructions to each of optical transmitter system 450, power system 452, and cooling system 456 to control the operation of modulation device 400. As explained herein, in one embodiment, modulation device 400 is housed in a self-contained pod which may be coupled to asset 402.

Optical transmitter system 450 includes a laser source module 460 and a beam control module 462. Laser source module 460 includes a high voltage power supply 464 which receives power from power system 452. High voltage power supply 464 drives a continuous wave laser 466. In one embodiment, continuous wave laser 466 is a continuous wave fiber laser. In one embodiment, continuous wave laser 466 is a continuous wave Ytterbium single mode fiber laser. Details regarding an exemplary continuous wave laser 466 are provided in U.S. patent application Ser. No. 11/973,437, titled POWERFUL FIBER LASER SYSTEM, filed Oct. 9, 2007, now U.S. Pat. No. 7,593,435, assigned to IPG Photonics Corporation, the disclosure of which is expressly incorporated by reference herein. Details regarding an exemplary continuous wave laser 466 are provided in U.S. patent application Ser. No. 11/611,247, titled FIBER LASER WITH LARGE MODE AREA FIBER, filed Dec. 15, 2006, now abandoned, assigned to IPG Photonics Corporation, the disclosure of which is expressly incorporated by reference herein. In one embodiment, continuous wave laser 466 is a solid state laser. Other exemplary continuous wave lasers include a 2.0 micrometer (μm) Thulium Fiber Laser (1.96-2.2 (μm) Thulium laser) having an output power of about at least 1 kW and a 1.0 μm , 800 Watt Direct Diode. An exemplary Thulium fiber laser is disclosed in U.S. Pat. No. 6,801,550, the disclosure of which is expressly incorporated by reference herein.

Referring to FIG. 8, an exemplary configuration of continuous wave laser 466 is shown. Continuous wave laser 466 includes a plurality of individual modules 600 each of which provide a single mode 1.07 μm output beam. The output of each of modules 600 is combined together through a module combiner 602 which brings the energy together in a single beam. This combined beam is coupled to an optical conduit 470 through a quartz coupler 604. Although three laser modules 600 are illustrated, any number of laser modules 600 may be included.

The components of a given laser module 600 are also shown in FIG. 8. The laser module 600 includes a plurality of diode lasers 610 each of which are coupled into a respective Ytterbium fiber 612. The output of the Ytterbium fibers 612 are combined through a fiber combiner 614 which brings the

energy together. This energy is fed through a coupler **615** into an Ytterbium fiber optic gain medium **616** which produces therefrom a single mode 1.07 μm output beam. Although three diode laser sets **610** are illustrated any number of diode laser sets **610** may be included.

In one embodiment, the power of continuous wave laser **466** is about 3 kilowatts (kW). In one embodiment, the power level of continuous wave laser **466** is about 5 kW. In one embodiment, the power level of continuous wave laser **466** is about 10 kW. In one embodiment, the power level of continuous wave laser **466** is about 20 kW. In one embodiment, the power level of continuous wave laser **466** is about 50 kW. In one embodiment, the power level of continuous wave laser **466** is between about 3 kW and 20 kW. In one embodiment, the power level of continuous wave laser **466** is at least 3 kW. In one embodiment, the power level of the continuous wave laser **466** is at least 3 kW for a duration of at least about 11 minutes.

Returning to FIG. 5, the optical energy produced by continuous wave laser **466** is communicated to beam control module **462** through optical conduit **470**. An exemplary optical conduit **470** is a fiber optic cable.

Beam control module **462** includes a beam expander **472** and a positioning system **474**. Beam expander **472** receives the optical energy from optical conduit **470** and provides a generally collimated beam **476** of optical energy which exits modulation device **400**. An exemplary beam expander is a Cassegrain telescope. Optical energy from optical conduit **470** is provided at a focus of the Cassegrain telescope which then generally collimates this optical energy to produce the expanded beam of optical energy **476**. In one embodiment, a path length of beam expander **472** may be automatically adjusted by system controller **454** to change output beam **476** from a generally collimated beam of optical energy to a focused beam of optical energy. In this case, beam expander **472** may serve both as a beam expander (collimator) and focusing optics. In one embodiment, beam control module **462** also includes separate focusing optics **477** which focus the output beam **476** at a given distance from modulation device **400**.

Positioning system **474** alters the direction in which collimated beam **476** is directed. Referring to FIG. 9, an exemplary configuration of modulation device **400** is shown. Modulation device **400** includes a housing **480** which houses system controller **454**, power system **452**, cooling system **456** and laser source module **460** of optical transmitter system **450**. Provided on a lower side of housing **480** is positioning system **474**. Positioning systems **474** includes a housing **482** coupled to housing **480** and a rotatable head **484** which is rotatable in directions **486** and **488**. In one embodiment, the rotatable head **484** has a pointing accuracy of up to 25 micro-radians. Rotatable head **484** includes an optical window **490** through which output beam **476** is directed. Output beam **476** is generally a directed beam and is not radiated in all directions. In one embodiment, positioning system **474** also includes at least one reflector **479** which may be controlled to alter the direction output beam **476** in directions **487** and **489**. The reflector **479** may be tilted to alter the elevation of collimated beam **476** by positioning system **474**.

Housing **480**, in the illustrated embodiment, is a pod which is detectably coupled to airplane **402** (see FIG. 6). Referring to FIG. 9, housing **480** includes a set of couplers **481** which cooperate with couplers **483** on asset to couple housing **480** to airplane **402**. In one embodiment, housing **480** is coupled to airplane **402** by any suitable conventional mechanism which permits housing **480** to be later detached from airplane **402**. Exemplary coupling systems are disclosed in U.S. patent

application Ser. No. 12/541,772, filed Aug. 14, 2009, the disclosure of which is expressly incorporated by reference herein.

Returning to FIG. 5, power system **452** includes a power source **500**. In one embodiment, power source **500** is a plurality of batteries. The batteries may be rechargeable batteries. Exemplary rechargeable batteries include lithium-ion batteries and lithium polymer batteries. Exemplary lithium-ion batteries include commercially available cells, such as those available from A123 Systems located in Watertown, Mass. In one embodiment, a plurality of lithium-ion cells are assembled into a battery pack **502** (see FIG. 9). In one embodiment, these cells have a nominal amp-hour rating of 2.3 Ah and a nominal load voltage of 3.3 DCV/cell. Based thereon, battery pack **502** should be able to deliver 52.8 Vat 2.3 amps for 1 hour. Under high load (10 C (10 \times 5 \times 2.3 or 115 Amps)) the voltage will "squat" to approximately 2.8 volts/cell. At this level the battery pack **502** could deliver 45 Vat 115 amps (or 5 kW) for 6 min. Under severe load (20C (20 \times 5 \times 2.3) or 230 amps)) the voltage would squat to approximately 2.5 volts. At this level the battery pack **502** could deliver 40 V at 230 amps (or 9 kW) for about a half minute. In one embodiment, battery pack **502** provides 28 VDC power for modulation device **400**.

The use of battery pack **502** allows high power to be provided to laser source module **460** without causing a large power spike requirement in the power system of asset **402**. In essence, battery pack **502** acts as a capacitor for laser source module **460**.

In one embodiment, continuous wave laser **466** is a three kilowatt Ytterbium single mode fiber laser such as ones commercially available from IPG Photonics located at IPG Photonics Corporation, 50 Old Webster Road Oxford, Mass. 01540 USA and power supply **452** provides about 28 VDC. In general, commercial laser sources from IPG Photonics include an AC-to-DC converter to convert power from an AC source to DC power for continuous wave laser **466**. Since power supply **452** already provides DC power, when a commercial laser source is being used for continuous wave laser **466** the AC-to-DC converter is removed and replaced with a DC driving circuit **620** (see FIGS. 10 and 11) which corresponds high voltage power supply **464**. DC driving circuit **620** provides power from power supply **452** to continuous wave laser **466** and regulates the power level provided.

Referring to either FIG. 10 or FIG. 11, continuous wave laser **466** is represented. Continuous wave laser **466**, as explained in connection with FIG. 8, includes a laser pump system **622** which includes a plurality of laser diodes **610**. Laser diodes **610** provide the pump energy for the lasing medium **616** of continuous wave laser **466**. The lasing medium **616** is provided as part of a fiber optical cable. The output of the lasing medium **616** is provided to optical conduit **470**.

In FIG. 10, power supply **452** is coupled to laser diodes **483** through DC driving circuit **620** which includes a single voltage regulator **626** that powers laser diodes **610**. In FIG. 11, power supply **452** is coupled to laser diodes **610** through DC driving circuit **620** which includes a plurality of current regulators **628**. Each current regulator **628** provides the power to one of the modules **600** (see FIG. 8) to provide power to the diodes of that module **600**.

Referring to either FIG. 10 or FIG. 11, power supply **452** may be charged with a battery charger **630** coupled to a prime power source **632**. Battery charger **630** is contained within housing **480**. Exemplary prime power sources include a standard AC wall outlet. Power supply **452** includes a battery

management interface **634** which controls the recharging of the batteries with battery charger **630**.

In one embodiment, power system **452** is recharged by a power source **638** of the asset **402**. An exemplary power source **638** is a DC generator of asset **402**. Referring to FIG. **12**, a controller of asset **402** determines if asset **402** is operating and stationary (or otherwise operating at a low power level), as represented by block **650**. The controller checks an operational sensor **652** to determine if asset **402** is operational. Exemplary operational sensors include engine sensors which indicate the operation of propulsion devices **408**. The controller also checks in the case of an airplane **402**, a wheel down sensor **654**, which indicates when the landing gear of airplane **402** is lowered. If the controller determines that airplane **402** is stationary (wheels down) and operational, then the controller provides charging energy to battery charger **630**, as represented by block **656**. In one embodiment, airplane **402** does not need to be stationary, but rather only be operating at a low power level, such as flying at a moderate speed. In this case, the controller monitors a power load of airplane **402** and provides charging energy to battery charger **630** when the power load is below a threshold amount.

Cooling system **456** provides cooling to the other components of modulation device **400**. In one embodiment, cooling system **456** provides cooling to laser source module **460**. In one embodiment, cooling system **456** provides cooling to laser source module **460** and the optical components of beam control module **462**. In one embodiment, cooling system **456** provides cooling fluid to power system **452**, laser source module **460**, and the optical components of beam control module **462**. Cooling system **456** may be either air-cooled or liquid cooled. Exemplary cooling systems are provided from Thermo Tek, Inc. located at 1200 Lakeside Parkway, Suite 200 in Flower Mound, Tex.

As indicated in FIG. **5**, the components of modulation device **400** are coupled to each other and to asset **402** through a digital communication system. In one embodiment, the digital communication system includes a common bus for the components within modulation device **400**. Although a digital communication system is illustrated, any suitable connection is acceptable between the components, such as analog connections. In one embodiment, laser source module **460** is coupled to enable input **443** and fire input **445** through discrete connections outside of the digital communication system. Further, warning/cuing system **430** is coupled to system controller **454** through a separate communication connection. An exemplary communication connection is the MIL-STD-1553 Bus.

Referring to FIG. **13**, in one embodiment, modulation device **400** also includes a target tracking and beam pointing system **510**. Target tracking and beam pointing system **510** monitors the scene surrounding asset **402**. In one embodiment, beam pointing system **510** includes a vision system, illustratively a FLIR system **512**, which provides images of the scene surrounding asset **402**. FLIR system **512**, illustratively, has a separate optical window **478** through which the vision system monitors the location of mobile tracking device **410**. In one embodiment, FLIR system **512** uses the same optical window **490** as output beam **476** and is bore sighted to output beam **476**.

Referring to FIGS. **14A** and **14B**, an operation of modulation device **400** is illustrated. Referring to FIG. **14A**, a check is made by a controller **432** of asset **402** whether warning/cuing system **430** is active, as represented by block **660**. Further, warning/cuing system **430** is set to survey mode, as represented by block **662**. In survey mode, warning/cuing

system **430** monitors the environment around asset **402** to determine if a mobile tracking device **410** is approaching asset **402**, as represented by block **664**. If a mobile tracking device **410** is detected by warning/cuing system **430**, then the controller **432** of asset **402** determines the coordinates of mobile tracking device **410**, as represented by block **665**. Warning/cuing system **430** may also sound an alarm or provide another indication of mobile tracking device **410** to the operator of asset **402**. Exemplary coordinates for the case when the asset is airplane **402** are the azimuth and elevation angles of mobile tracking device **410** relative to airplane **402**.

The controller **432** of asset **402** passes the coordinates of mobile tracking device **410** to modulation device **400**, as represented by block **668**. Modulation device **400** moves rotatable head **484** to the specified angular position and FLIR system **512** is directed at the specified coordinates. FLIR system **512** may be gimbaled to move independently within housing **480**. The controller **432** of asset **402** determines if mobile tracking device **410** has acquired mobile tracking device **410** with tracking module **510**, as represented by block **670**. If modulation device **400** has not acquired mobile tracking device **410**, new coordinates of mobile tracking device **410** are determined and passed again to modulation device **400**. As such, modulation device **400** remains slaved to controller **432**. If modulation device **400** has acquired mobile tracking device **410** then the initial coordinates corresponding to the lock on location of mobile tracking device **410** are saved by system controller **454**, as represented by block **671**.

Next, system controller **454** of modulation device **400** checks to see if modulation device **400** is authorized to fire continuous wave laser **466**, as represented by block **672**. Continuous wave laser **466** is authorized to fire when fire input **445** is set to fire. If continuous wave laser **466** is not authorized to fire, then an indication of this is provided to the operator of modulation device **400**, as represented by block **674**. Exemplary indications include visual alarms, audio alarms, tactile alarms, and combinations thereof. If continuous wave laser **466** is authorized to fire, then continuous wave laser **466** is fired at mobile tracking device **410**. Beam control module **462** has already adjusted the output direction of collimated beam **476** to coincide with the direction to modulation device **400**.

After modulation device **400** has acquired mobile tracking device **410**, beam pointing system **510** tracks the location of mobile tracking device **410** and updates the coordinates for mobile tracking device **410**, as represented by block **679**. Beam control module **462** rotates and reflector **479** tilts, as necessary, to maintain collimated beam **476** on mobile tracking device **410**.

The position of beam control module **462** is monitored to determine when it has moved a threshold amount, as represented by block **678**. Once mobile tracking device **410** has changed direction by a threshold amount, it no longer is locked on asset **402** and the threat to asset **402** is neutralized. This change in direction of mobile tracking device **410** is indicated by the change in direction of beam control module **462** to keep collimated beam **476** on mobile tracking device **410**. Once the threshold amount is reached, continuous wave laser **466** is deactivated as represented by block **681**. Control is again passed back to warning/cuing system **430** to monitor for additional mobile tracking devices **410**.

In one embodiment, the threshold amount is about 10 degrees in either the azimuth or elevation directions. In one embodiment, the threshold amount is about 5 degrees in either the azimuth or elevation directions. In one embodiment, the threshold amount is about 3 degrees in either the azimuth or elevation directions. In one embodiment, system

controller 454 monitors the time since mobile tracking device 410 was acquired by modulation device 400 and deactivates continuous wave laser 466 once a threshold amount of time has passed.

In one embodiment, beam pointing system 510 has a narrower field of view than sensor modules 431 of warning/cuing system 430. As such, sensor modules 431 are able to survey the surrounding environment for mobile tracking device 410 approaching from various directions, while beam pointing system 510 is fixed on the narrow portion of the environment surrounding a detected mobile tracking device 410.

In one embodiment, warning/cuing system 430 is integrated into modulation device 400 and system controller 454 detects the launch of a mobile tracking device 410 based on the images captured by warning/cuing system 430. Although various tasks are discussed as being carried out by one of warning/cuing system 430, controller 432, and system controller 454, these may be carried out by a common controller.

As mentioned herein output beam 476 is produced by a continuous wave laser 466. Output beam 476 is able to defeat mobile tracking devices 410 which modulate the incoming electromagnetic radiation even though output beam 476 is not pulsed and contains no mobile tracking device specific codes. Output beam 476 is also effective against imaging detection systems of more advanced mobile tracking device 410. Exemplary mobile tracking device specific codes include jamming codes.

Referring to FIG. 15, a ship 680 is shown having a rudder 682 and modulation device 400. Also shown is a second ship 684 having a rudder 686 which directs the direction of travel of second ship 684. Second ship 684 also incorporates a mobile tracking device 410. Second ship 684 is attempting to track first ship 680 and close the distance between first ship 680 and second ship 684. Mobile tracking device 410 generates course correction signals for second ship 684 so that second ship 684 continues to close on first ship 680. In this example, mobile tracking device 410 does not include a separate propulsion system 412 and guidance system 414. Rather, second ship 684 has its own propulsion system, such as an engine, and rudder 686 directs the travel path of second ship 684 based on input from controller 416.

As illustrated in FIG. 7, telescope 420 of mobile tracking device 410 attempts to collect a large amount of electromagnetic radiation to extend the viewing range of the modulation device 400. The distance d indicated in FIG. 15, corresponds to a viewing distance of mobile tracking device 410 which is the distance at which mobile tracking device 410 is first able to detect first ship 680. At distances beyond distance d , mobile tracking device 410 is not able to see first ship 680. Of course, mobile tracking device 410 may be closer to first ship 680 than the distance d and in fact over time mobile tracking device 410 tracks first ship 680 so that second ship 684 closes the distance between second ship 684 and first ship 680.

Modulation device 400, upon locking on the position of mobile tracking device 410, fires continuous wave laser 466 such that output beam 476 is received by telescope 420 of mobile tracking device 410. Output beam 476 has different effects on mobile tracking device 410 depending on the separation of mobile tracking device 410 from modulation device 400. Distance d is illustratively divided into three bands, a near distance band 692, a mid distance band 694, and a far distance band 696. At distances in near distance band 692, the energy of output beam 476 explodes seeker head 415 and destroys mobile tracking device 410. At distances in mid distance band 694, the energy of output beam 476 destroys the functionality of detector 418. In one example, a modulation device 400 including a 3 kW Ytterbium continuous fiber laser

as continuous wave laser 466 destroyed a focal plane array detector of a mobile tracking device 410 at a distance of about 3 kilometers.

At distances in far distance band 696, the energy of output beam 476 produces a plurality of internal localized sources within mobile tracking device 410. These internal localized sources are produced by the energy of output beam 476 being absorbed by the optical components of mobile tracking device 410 which then reradiate the absorbed energy in multiple wavelengths, similar to a blackbody source. Referring to FIG. 7, six internal localized sources 700 are illustrated. Sources 700A and 700B correspond to filter 425. Source 700C corresponds to optical window 428. Source 700D corresponds to secondary mirror 423. Source 700E corresponds to primary mirror 421. Source 700F corresponds to optics 424. The sources 700 may be produced based on the absorption characteristics of the material of each component or the presence of an imperfection in a component. For instance, optical window 428 may become scratched during travel resulting in an imperfection that produces source 700C. Although six sources 700 are illustrated, a single source 700 or other number of sources 700 may be produced at various times.

The source 700 produces infrared energy which is brighter than the infrared signature of asset 402 being tracked by mobile tracking device 410. As such, controller 416 of mobile tracking device 410 interprets the respective source 700 as asset 402 instead of asset 402 itself. If source 700 is off-axis, this will cause controller 416 to try to center source 700 resulting in error signal 429 being increased. Guidance system 414 will then turn mobile tracking device 410 in an attempt to center source 700. This results in mobile tracking device 410 turning away from the location of asset 402. Since source 700 is radiating from a portion of mobile tracking device 410, it cannot be centered. Output beam 476 does not require a mobile device specific code to defeat mobile tracking device 410. Therefore, no knowledge of the modulation scheme of mobile tracking device 410 is required to defeat mobile tracking device 410. In one embodiment, the power level of continuous wave laser 466 is about 3 kW exiting modulation device 400.

Source 700 do not explode mobile tracking device 410, such as what happens in near distance band 692, nor is detector 418 of mobile tracking device 410 destroyed, such as what happens in mid distance band 694. Rather, source 700 confuses controller 416 to believe that one or more (if multiple sources) additional objects are present in the field of view of mobile tracking device 410 with a higher intensity than asset 402. Controller 416 tracks the brightest object in its field of view and thus attempts to track one of sources 700, instead of asset 402.

In far distance band 696, mobile tracking device 410 is not destroyed, but rather sent off course. As mobile tracking device 410 approaches modulation device 400 the power level of output beam 476 increases exponentially resulting in detector 418 being destroyed in mid distance band 694 and/or mobile tracking device 410 exploding in near distance band 692. Of course, if mobile tracking device 410 is engaged in far distance band 696 mobile tracking device 410 likely will not enter mid distance band 694 because mobile tracking device 410 will be directed in a different direction due to output beam 476.

The effects of sources 700 are shown through a comparison of FIGS. 18 and 19 with FIGS. 16 and 17. Referring to FIG. 16, a typical response of a mobile tracking device 410 in far distance band 696 is shown. The degree of turn being carried out by a mobile tracking device 410 is proportional to a

voltage associated with a gyroscope of the seeker head 415. In FIG. 16, a raw voltage of detector 418 is shown as curve 550. Also shown is the voltage associated with the gyroscope of the seeker head 415 as curve 552. The amplitude of curve 552 corresponds to error signal 429. The curve 552 shown in FIG. 16, represents a mobile tracking device 410 which has locked onto an asset 402 and is following directly behind the asset 402. The Fourier transform of curve 550 is shown in FIG. 17. As shown in FIG. 17, the spectrum 554 for curve 550 is generally tightly defined around 1000 Hz. This is generally consistent with the modulation scheme of the mobile tracking device 410 when it is inline with asset 402.

Referring to FIG. 18, a 3 kilowatt, continuous wave, infrared, Ytterbium single mode fiber laser with an m^2 of 1 was used as continuous wave laser 466 of modulation device 400 associated with an asset 402. In tests, a mobile tracking device 410 was fired at asset 402. Modulation device 400 directed a continuous beam of optical energy 476 at the optical window 428 of mobile tracking device 410. The continuous beam of optical energy causes the generation of sources 700 which are falsely recognized by mobile tracking device 410 as asset 402.

Referring to FIG. 18, the corresponding curves 550' and 552' for the above example are shown. A first portion 560 of curve 550' (and corresponding portion 562 of curve 552') are shown prior to activation of continuous wave laser 466. As shown by portion 562, the travel of mobile tracking device 410 is fairly straight. Continuous wave laser 466 is activated at point 564. This results in detector 418 being flooded with IR energy as represented by the increase in amplitude of curve 550' and the generation of sources 700. The generation of sources 700 appears to be later in time potentially indicating the need for the components of mobile tracking device 410 to heat up to cause sources 700. At portion 564 of curve 552' controller 416 is instructing guidance system 414 to turn mobile tracking device 410 more aggressively. This increase in turning of mobile tracking device 410 increases in portion 566 even as the intensity of curve 550' falls in portion 568. This fall in intensity is indicative of mobile tracking device 410 moving far off course so that not as much of collimated beam 476 enters optical window 428. As shown in FIG. 19, the spectrum 554' for curve 550' is considerably broadened compared to spectrum 554 of FIG. 16.

Referring to FIG. 20, mobile tracking device 410 is traveling in a direction towards asset 402, as represented by block 710. This is illustrated in FIG. 6A wherein an airborne mobile tracking device 410 is shown traveling in direction 712 towards asset 402. As explained herein, modulation device 400 fires continuous wave laser 466 to direct output beam 476 towards mobile tracking device 410. This causes the generation of at least one localized source 700 within mobile tracking device 410 which is within a field of view of mobile tracking device 410. These one or more localized sources 700 are brighter than the infrared energy radiated from asset 402 and are generated at locations which do not correspond with the current direction 712 of mobile tracking device 410, as represented by block 714 in FIG. 20. As such, controller 416 attempts to point mobile tracking device 410 at the brighter source 700 and in doing so changes the direction of mobile tracking device 410 to direction 716 as shown in FIG. 6B. Beam control module 462 alters the direction of output beam 476 to coincide with the new direction of mobile tracking device 410, as represented by block 720 in FIG. 20. This again causes the generation of the localized sources 700 within mobile tracking device 410 which are within a field of view of mobile tracking device 410. As such, controller 416 attempts to point mobile tracking device 410 at the brighter source 700

and in doing so changes the direction of mobile tracking device 410 to direction 722 as shown in FIG. 6C. Beam control module 462 alters the direction of output beam 476 to coincide with the new direction of mobile tracking device 410. Once again this causes the generation of the localized sources 700 within mobile tracking device 410 which are within a field of view of mobile tracking device 410. As such, controller 416 attempts to point mobile tracking device 410 at the brighter source 700 and in doing so changes the direction of mobile tracking device 410 to direction 724 as shown in FIG. 6D. In moving beam control module 462 to track mobile tracking device 410 along the direction 724, rotatable head 484 exceeds the threshold rotation amount and continuous wave laser 466 is deactivated, as shown in FIG. 6D.

Unlike prior art devices, modulation device 400 is not mobile tracking device 410 specific. Rather, modulation device 400 is effective against both imaging and non-imaging mobile tracking devices 410. Further, modulation device 400 does not require a mobile device specific code to be known in advance. Rather, modulation device 400 relies on the continuous provision of optical energy into mobile tracking device 410 to produce localized sources 700 within the field of view of mobile tracking device 410 such that detector 418 is confused as to the location of asset 402.

In another example of the use of modulation device 400, a 3 kW, continuous wave, infrared, Ytterbium single mode fiber laser was used as continuous wave laser 466 of modulation device 400 associated with an asset 402. In tests, a plurality of different mobile infrared mobile tracking devices 410 were fired at asset 402 while asset 402 was at ground level. Modulation device each time directed output beam 476 at the optical window of the respective mobile tracking device 410. The modulation device 400 was effective against all of the plurality of different mobile tracking device 410 at a range of up to about 1250 meters from modulation device 400. A computer model was made wherein asset 402 was at ground level, a wavelength of continuous wave laser 466 was set to 1.07 μm , and values for additional parameters modulation device 400 and mobile tracking device 410 were set. The computer model provided a predicted range of up to 1290 meters for a plurality of different mobile tracking device 410. This computer model demonstrated good agreement with the experimentally obtained range of up to 1250 meters.

In a further example of the use of modulation device 400, a 3 kilowatt, continuous wave, infrared, Ytterbium single mode fiber laser was used as continuous wave laser 466 of modulation device 400 associated with an asset 402. In tests, a specific mobile tracking device 410 was fired at asset 402 while asset 402 was at ground level. Modulation device 400 directed output beam 476 at the optical window of mobile tracking device 410. The modulation device 400 was effective against the specific mobile tracking device 410 at a range of up to about 2650 meters from modulation device 400. The above-mentioned computer model provided a predicted range of up to 2440 meters for the specific mobile tracking device 410. This demonstrates good agreement with the experimentally obtained range of up to 2650 meters.

Returning to FIG. 13, in one embodiment, beam pointing system 510 further includes a laser designator system 514. Laser designator system 514 includes a pulsed laser which is directed at mobile tracking device 410 and reflected therefrom. Based on the reflected signal, laser designator system 514 is able to determine a distance from modulation device 400 to mobile tracking device 410. In the case wherein modulation device 400 includes focusing optics 477 or wherein beam expander 472 may be focused, one of system controller 454 and beam pointing system 510 adjusts a focal length of

focusing optics **477** to focus output beam **476** at the location of mobile tracking device **410**. In one embodiment, output beam **476** is focused at a distance shorter than the determined range to mobile tracking device **410**, the distance being chosen based on an estimated speed of mobile tracking device **410**. In one embodiment, this distance corresponds to the expected position of mobile tracking device **410** based on assumptions regarding the relative difference in speed between asset **402** and mobile tracking device **410**. In one embodiment, the estimated speed of mobile tracking device **410** is selected based on the type of mobile tracking device **410** which is identified based on a retro-reflection received from mobile tracking device **410**.

Laser designator system **514**, illustratively, has a separate optical window **515** through which the laser beam of laser designator system **514** is sent out of modulation device **400** and the reflection from mobile tracking device **410** is received to determine the distance to mobile tracking device **410**. In one embodiment, laser designator system **514** uses the same optical window **490** as output beam **476** and is bore sighted to output beam **476**.

Referring to FIG. **32**, in one embodiment, the optical transmitter system **450** of modulation device **400** includes a laser source **900**. Laser source **900** includes a plurality of semiconductor lasers **902-906** which produce optical energy for modulation device **400**. In one embodiment, the semiconductor lasers are continuous wave lasers. In one embodiment, lasers **902-906** are quantum cascade lasers. Exemplary quantum cascade lasers include External Cavity Quantum Cascade Lasers available from Daylight Solutions located at 13029 Danielson Street, Suite 130 in Poway, Calif. and Pranalytica located at 1101 Colorado Avenue in Santa Monica, Calif. In one embodiment, the semiconductor lasers have a wavelength of at least about 1 μm . In one embodiment, the semiconductor lasers have a wavelength of at least about 2 μm .

The output optical energy of each of lasers **902-906** is carried through respective optical conduits **908-912** to beam control module **462**. The end of the respective optical conduits **908-912** are positioned generally at a focus of beam expander **472**. Beam control unit **462** sends the optical energy produced by each of lasers **902-906** towards mobile tracking device **410**. The optical energy of lasers **902-906** is generally incoherently combined to produce a beam with a power level sufficient to function in the same manner as continuous wave laser **466**.

In one embodiment, lasers **902-906** combine to produce about 3 kW of power. In one embodiment, the power level of the combined lasers **902-906** is about 5 kW. In one embodiment, the power level of the combined lasers **902-906** is about 10 kW. In one embodiment, the power level of the combined lasers **902-906** is about 20 kW. In one embodiment, the power level of the combined lasers **902-906** is about 50 kW. In one embodiment, the power level of the combined lasers **902-906** is between about 3 kW and 20 kW. In one embodiment, the power level of the combined lasers **902-906** is at least 3 kW. In one embodiment, the power level of the combined lasers **902-906** is at least 3 kW for a duration of at least about 11 minutes. The combined lasers **902-606** may be used together to form the output beam of modulation device **400**. In one embodiment, the output beam of modulation device **400** is at least about 60 kW. In one embodiment, the output beam of modulation device **400** is in the range of about 60 kW to about 100 kW.

By using multiple semiconductor lasers, as opposed to a single high power laser, the amount of heat management needed is greatly reduced because the individual semicon-

ductor lasers collectively do not generate the same amount of heat as the high power laser **466**.

Referring to FIG. **21**, a portable cutting device **1000** is shown. The privacy device may be incorporated into the portable cutting device to identify EO devices and then to use the high power capability of the cutting device to hamper the operation of the EO device or an asset associated with the EO device. The portable cutting device **1000** includes a laser source **1002**, a power supply **1004**, a storage container **1006**, and a laser directing device **1008**. Portable cutting device **1000** may be used in multiple applications for cutting through materials. Exemplary materials include wood, masonry, metal, and other materials. Portable cutting device **1000** does not require an internal combustion generator and therefore does not have the associated noise and exhaust issues.

A cooling unit **1011** may optionally be provided to actively cool one or both of laser source **1002** and power supply **1004**. In one embodiment, cooling unit **1011** is an air-cooled chiller. In one embodiment, cooling unit **1011** is a thermo-electric cooling system. In one embodiment, cooling unit **1011** is an on-demand cooler which directs cooling air at the optical coupler which couples laser source **1002** to optical conduit **1030**. The on-demand cooler may be manually activated or activated based on a monitored temperature sensor value. The cooling air of the on-demand cooler is a non-flammable gas.

In one embodiment, storage container **1006** is a backpack, such as backpack **1010** shown in FIG. **22**. Backpack **1010** is worn by a human operator **1020**. Backpack **1010** includes a cargo carrying portion **1012** and two straps **1014** which are positioned over the shoulders of the human operator **1020** and extend under the arms of the human operator **1020**. Backpack **1010** is positioned on the back side of the human operator **1020**. In one embodiment, storage container **1006** is positioned on a front side of the human operator **1020**. In one embodiment, storage container **1006** is positioned to either a left side or a right side of the human operator **1020**. In one embodiment, storage container **1006** is positioned on at least two of a back side, a left side, a front side, and a right side of the human operator **1020**.

In one embodiment, laser source **1002**, power supply **1004**, and controller **1005** are positioned within cargo carrying portion **1012** of backpack **1010** for transport by human operator **1020**. Referring to FIG. **22A**, cargo carrying portion **1012** is represented. Cargo carrying portion **1012** includes a first portion **1040** and a second portion **1042** which cooperate to form an interior space of cargo carrying portion **1012**. In one embodiment, cargo carrying portion **1012** is made of a flexible material and first portion **1040** and second portion **1042** are secured together with one or more suitable fasteners **1044**. Exemplary fasteners include zippers, snaps, and other suitable fasteners. In one embodiment, first portion **1040** and second portion **1042** are integrally formed and are separable only along a portion, such as the left side, top side, and right side. In one embodiment, cargo carrying portion **1012** is a hard case and first portion **1040** and second portion **1042** are secured together with one or more suitable fasteners **1044**. Exemplary fasteners include latches and other suitable fasteners. Regardless of the configuration, first portion **1040** and second portion **1042** cooperate to provide a closed space for carrying laser source **1002**, power supply **1004**, controller **1005**, and, optionally, cooling unit **1011** during transport and the ability to open at least a portion of cargo carrying portion **1012** to access laser source **1002**, power supply **1004**, controller **1005**, or cooling unit **1011**, such as to replace the batteries of power supply **1004**.

Laser directing device **1008** is held by the human operator **1020**. Laser directing device **1008** includes a stock portion

1050 which may be positioned next to the shoulder of human operator **1020**. Laser directing device **1008** also includes a handle **1052** whereby the hand of the operator may carry laser directing device **1008** and a grip **1054** which human operator **1020** may grasp during operation of portable cutting device **1000**.

Laser directing device **1008** is coupled to laser source **1002** through an optical conduit **1030**. Exemplary optical conduits include fiber optic cable. Laser directing device **1008** also includes an optical conduit **1056** which is coupled to optical conduit **1030**. Optical energy generated by laser source **1002** travels through optical conduit **1030** and optical conduit **1056** and is discharged through an end **1058** of laser directing device **1008** towards a barrier **1036** (see FIG. **22**). The energy discharged by laser directing device **1008** is of sufficient strength to cut the material of barrier **1036**. Laser directing device **1008** includes an optical system **1110** which shapes the energy exiting optical conduit **1056** of laser directing device **1008** to focus it at a focus **1114**. Focusing optics **1060** concentrate the energy onto a defined location on the barrier **1036**.

Returning to FIG. **22A**, optical conduit **1030** is coupled to laser source **1002** at a location in the interior of cargo carrying portion **1012**. Optical conduit **1030** extends through a wall of cargo carrying portion **1012** and is coupled to laser directing device **1008** outside of storage container **1006** at optical connector **1106** (see FIG. **25**). In one embodiment, optical conduit **1030** couples to laser directing device **1008** through grip **1054**.

Optical conduit **1030** is provided in a protective sheath **1032**. The protective sheath **1032** should have a high thermal conductivity and limit a bend radius of optical conduit **1030**. In one embodiment, protective sheath **1032** is made of segmented pieces of metal coupled together. Also included with protective sheath **1032** is an electrical control and signal cable **1034** which couples controller **1005** with components of laser directing device **1008**. In one embodiment, controller **1005** is coupled to a controller **1130** of laser directing device **1008**. In one embodiment, controller **1005** is coupled to controller **1130** over through a standard RS-232 or RS-422 interface. In one embodiment, signal cable **1034** is an optical fiber and controller **1005** communicates with controller **1130** via any type of standard protocol, such as Internet protocol. As explained herein, controller **1130** interfaces with the operator **1020**, the components of laser directing device **1008**, and monitors sensors associated with laser directing device **1008**. Controller **1130** then communicates this information to controller **1005** which controls the operation of laser source **1002**.

Laser source **1002**, in one embodiment, is a continuous wave laser. In one embodiment, laser source **1002** is a fiber laser. In one embodiment, laser source **1002** is a continuous wave Ytterbium single mode fiber laser. Exemplary continuous wave single mode fiber lasers are provided by IPG Laser GmBH located at 50 Old Webster Road in Oxford, Mass. 01540. Details regarding an exemplary laser source **1002** are provided in U.S. patent application Ser. No. 11/973,437, titled POWERFUL FIBER LASER SYSTEM, filed Oct. 9, 2007, now U.S. Pat. No. 7,593,435, assigned to IPG Photonics Corporation, the disclosure of which is expressly incorporated by reference herein. Details regarding an exemplary laser source **1002** are provided in U.S. patent application Ser. No. 11/611,247, titled FIBER LASER WITH LARGE MODE AREA FIBER, filed Dec. 15, 2006, now abandoned, assigned to IPG Photonics Corporation, the disclosure of which is expressly incorporated by reference herein. In one embodiment, laser source **1002** is a solid state laser.

Referring to FIG. **31**, an exemplary configuration of laser source **1002** is shown. Laser source **1002** includes a plurality of individual modules **1200** each of which provide a single mode 1.07 micrometer output beam. The output of each of modules **1200** is combined together through a module combiner **1203** which brings the energy together in a single beam. This combined beam is coupled to optical conduit **1030** through a quartz coupler **1204**. Although three laser modules **1200** are illustrated any number of laser modules **1200** may be included.

The components of a given laser module **1200** are also shown in FIG. **31**. The laser module **1200** includes a plurality of diode lasers **1210** each of which are coupled into a respective Ytterbium fiber **1212**. The output of the Ytterbium fibers **1212** are combined through a fiber combiner **1214** which brings the energy together. This energy is fed through a coupler **1215** into an Ytterbium fiber optic gain medium **1216** which produces there from a single mode 1.07 micrometer output beam. Although three diode laser sets **1210** are illustrated any number of diode laser sets **1210** may be included.

In one embodiment, the power of laser source **1002** is about 3 kilowatts. In one embodiment, the power level of laser source **1002** is about 5 kilowatts. In one embodiment, the power level of laser source **1002** is about 10 kilowatts. In one embodiment, the power level of laser source **1002** is about 20 kilowatts. In one embodiment, the power level of laser source **1002** is about 50 kilowatts. In one embodiment, the power level of laser source **1002** is between about 3 kilowatts and 20 kilowatts. In one embodiment, the power level of laser source **1002** is at least 3 kilowatts.

In one embodiment, power supply **1004** is a portable power supply. An exemplary portable power supply is one or more batteries, such as rechargeable batteries. Exemplary rechargeable batteries include lithium-ion batteries and lithium polymer batteries. Exemplary lithium-ion batteries include commercially available cells, such as those available from A123 Systems located in Watertown, Massachusetts. In one embodiment, the cells have a nominal amp-hour rating of 2.3 Ah and a nominal load voltage of 3.3 DCV/cell. Further exemplary lithium-ion batteries include commercially available cells available from SAFT America, Inc. located at 313 Crescent St Ne in Valdese, North Carolina in Watertown, Mass. In one embodiment, the cells have a nominal maximum current of 500 A, a specific power of 5.1 kW/kg, a specific energy of 430 kJ/kg, and a mass of 0.94 kg.

Referring to FIG. **23**, multiple lithium-ion battery packs **1070** are coupled together in series to produce power supply **1004**. Each of lithium-ion battery pack **1070** delivers about 5 kilowatts of power for about six minutes. Since two units are shown coupled together in FIG. **23**, the resultant power supply **1004** can deliver about 10 kilowatts of power. Each of lithium-ion battery pack **1070** includes multiple individual lithium-ion batteries. In one embodiment, lithium-ion battery pack **1070** commercially available cells available from A123 Systems located in Watertown, Mass. The two lithium-ion battery packs **1070** together weigh about 28 pounds (13.6 kg).

Referring to FIG. **24**, multiple lithium polymer batteries **1072** are coupled together in series to produce power supply **1004**. Each of lithium polymer batteries **1072** delivers about 4.5 kilowatts of power for about two minutes. Since eight units are shown coupled together in FIG. **24**, the resultant power supply **1004** can deliver about 13 kilowatts of power for about six minutes. The eight lithium polymer batteries **1072** together weigh about 21 pounds (9.6 kg).

In one embodiment, laser source **1002** is a three kilowatt Ytterbium single mode fiber laser such as ones commercially available from IPG Photonics located at IPG Photonics Cor-

poration, 50 Old Webster Road Oxford, Mass. 01540 USA and power supply **1004** is as shown in FIG. **24**. This combination results in portable cutting device **1000** having a cutting speed of about fifty inches per minute for 0.5 inch thick steel. This combination may cut up to 900 inches of material on a single charge of power supply **1004**, arranged as shown in FIG. **24**. In general, commercial laser sources include an AC-to-DC converter to convert power from an AC source to DC power for laser source **1002**. Since power supply **1004** already provides DC power, when a commercial laser source is being used the AC-to-DC converter is removed and replaced with DC driving circuit **1080**. DC driving circuit **1080** provides power from power supply **1004** to laser source **1002** and regulates the power level provided. In a similar fashion, commercial laser sources often include cooling lines to cool the laser source and over-temperature sensors to monitor the temperature of the laser source. In one embodiment, when a commercial laser source is being used the cooling lines are removed and the over-temperature sensors of the commercial laser source are overridden. With this arrangement and using the laser directing device **1008** represented in FIG. **25**, laser directing device **1008** was operated at 3 kW power for 1020 seconds without disabling the laser source **1002**.

Referring to either FIG. **29** or FIG. **30**, laser source **1002** is represented. Laser source **1002** includes a laser pump system **1082** which includes a plurality of laser diodes **1083**. Laser diodes **1083** provide the pump energy for the lasing medium **1084** of laser source **1002**. The laser diodes **1083** are divided into a plurality of modules. In one embodiment, 42 diodes are provided in a single module and seven modules are provided. The lasing medium **1084** is provided as part of a fiber optical cable. The output of the lasing medium **1084** is provided to optical conduit **1030**.

In FIG. **29**, power supply **1004** is coupled to laser diodes **1083** through DC driving circuit **1080** which includes a single voltage regulator **1081** that powers laser diodes **1083**. In FIG. **30**, power supply **1004** is coupled to laser diodes **1083** through DC driving circuit **1080** which includes a plurality of current regulators **1086**. Each current regulator **1086** provides the power to one of the modules to provide power to the diodes of that module.

Referring to either FIG. **29** or FIG. **30**, power supply **1004** may be charged with a battery charger **1088** coupled to prime power source **1090**. Exemplary prime power sources include a standard AC wall outlet or an alternator of a vehicle. Power supply **1004** includes a battery management interface **1092** which controls the recharging of the batteries with battery charger **1088**.

Referring to FIG. **25**, an exemplary embodiment of laser directing device **1008** is shown. Laser directing device **1008** has a body **1102** with a downwardly extending handle **1104**. Optical conduit **1030** is coupled to an optical connector **1106** which couples optical conduit **1030** to optical conduit **1108**. Optical conduit **1108** is coupled to a collimating chamber **1110**.

Collimating chamber **1110** includes an optical system **1112** which focuses light carried by optical conduit **1108** at a focus **1114** generally corresponding to the location of barrier **1036**. In one embodiment, the focal range of laser directing device **1008** is from about six inches from end **1058** to about sixty feet from end **1058**. In one embodiment, the focal range of laser directing device **1008** is from about six inches from end **1058** to about three kilometers from end **1058**.

In the illustrated embodiment, optical system **1112** includes a first lens **1116** and a second lens **1118**. First lens **1116** receives the light from optical conduit **1108** which acts

like a point source. In the illustrated embodiment, first lens **1116** is positioned such that an end **1120** of optical conduit **1108** is located at a focus of first lens **1116** which results in a generally collimated beam **1122** being produced inside of collimating chamber **1110**. Second lens **1118** focuses collimated beam **1122** at barrier **1036**. Although a two lens system is shown, other lens systems may be used to focus the light at focus **1114**.

The position of one or both of first lens **1116** and second lens **1118** may be altered relative to the position of end **1120** of optical conduit **1108** or the other of first lens **1116** and second lens **1118** to change the location of focus **1114**. In one embodiment, a portion of collimating chamber **1110** is moveable relative to the remainder of collimating chamber **1110** to allow an operator to manually adjust the relative spacing of first lens **1116** and second lens **1118** similar to a scope on a rifle. In one embodiment, first lens **1116** is positioned on a moveable stand **1124** and second lens **1118** is positioned on a moveable stand **1126**. Both of moveable stand **1124** and moveable stand **1126** are controlled through respective motors to adjust the position of the respective first lens **1116** and second lens **1118**.

The motors are controlled by a controller **1130** of laser directing device **1008**. In one embodiment, controller **1130** receives an input from an operator control (not shown) through which the operator specifies the desired position of focus **1114**. In one embodiment, controller **1130** receives an input from a laser rangefinder **1140** which determines the distance d from laser directing device **1008** to barrier **1036**. Based on the determined distance d , controller **1130** moves one or both of first lens **1116** and second lens **1118** to place focus **1114** at distance d . In one embodiment, other locating devices may be used, such as GPS systems.

In one embodiment, instead of or in addition to a laser range finder device **1140** includes a visible guide laser which provides a visible marker for the operator of where laser directing device **1008** is going to cut. The visible guide laser should be collinear with an axis of collimating chamber **1110**. In one example, the visible guide laser is a HeNe laser. In one embodiment, laser source **1002** acts as a guide laser. The operator wears goggles which can detect and provide a visible image of the barrier and the laser source at the barrier. In this embodiment, the laser source can be set to a low power setting to align with barrier and then set to a high power setting to cut barrier.

Laser directing device **1008** also includes a compressed gas container **1150** which provides air to a regulator valve **1152** through a conduit **1154**. Regulator valve **1152** provides gas to a nozzle **1156** through a conduit **1157**. Nozzle **1156** directs gas **1158** at focus **1114**. In one embodiment, the position of nozzle **1156** is adjustable. The gas blows molten material produced during cutting away from laser directing device **1008**, the operator, and away from barrier **1036**. Controller **1130** controls regulator valve **1152** to place conduit **1157** in fluid communication with conduit **1154** when a trigger **1160** of laser directing device **1008** is pulled by the operator. In one embodiment, the gas stored in compressed gas container **1150** is a non-flammable gas. Exemplary gases include freon, nitrogen, argon, and other non-flammable gases.

Controller **1130** also controls regulator valve **1152** to place conduit **1154** in fluid communication with a fluid conduit **1162**. Fluid conduit **1162** terminates at a fluid inlet **1164** to collimating chamber **1110**. The gas presented to collimating chamber **1110** cools first lens **1116** and second lens **1118** from the heat generated by the light from optical conduit **1108**. Warmer gas in collimating chamber **1110** is exhausted through a fluid outlet **1166** of collimating chamber **1110**. In

one embodiment, controller **1130** controls regulator valve **1152** to provide gas to fluid conduit **1162** whenever trigger **1160** is pulled. In one embodiment, controller **1130** controls regulator valve **1152** to provide gas to fluid conduit **1162** when a temperature sensor monitoring collimating chamber **1110** detects an elevated temperature.

Laser directing device **1008** further includes a sensor **1170** which monitors for light having generally the same wavelength provided by laser directing device **1008** at focus **1114**. Sensor **1170** monitors the intensity of the light reflected from barrier **1036**. Referring to FIG. 26A, when laser directing device **1008** is generally normal to barrier **1036**, the light (represented by arrow **1172**) focused by laser directing device **1008** strikes barrier **1036** generally normal to barrier **1036**. A portion of the light (represented by arrow **1174**) is reflected by barrier **1036**. Often the reflected portion is small compared to the portion which interacts with barrier **1036** to cut barrier **1036** and as such does not pose a threat to the operator. However, when barrier **1036** is more reflective the strength of the reflected portion increases. When a 1.07 micrometer wavelength beam is used, irradiance levels of about 5 milliwatts per square centimeter (mW/cm^2) pose a threat to the operator at any range less than 77 km, such as damage to the retina of the eye. At wavelengths less than 1.55 micrometer, light is transmitted into the eye which can damage the retina. In one embodiment, a laser source **1002** having a wavelength of at least 1.55 micrometer is used. In one embodiment, a laser source **1002** having a wavelength of about 2.0 micrometer is used. At wavelengths of 1.55 micrometer and greater, damage to the cornea of the eye is the concern. Since the cornea heals quite easily and the retina is generally permanently damaged, wavelengths which are absorbed by the cornea and not transmitted are considered to be "eye safe".

By monitoring the irradiance levels of the reflected portion with sensor **1170**, controller **1130** may make a determination of actions to take. In one embodiment, if the irradiance levels of the reflected portion are above a first threshold, controller **1130** sends an instruction to controller **1005** to shut down laser source **1002**. In one embodiment, the first threshold is about $2.5 \text{ mW}/\text{cm}^2$.

In one embodiment, if the irradiance levels of the reflected portion are above a first threshold, controller **1130** sounds an alarm which provides an indication to the operator that the irradiance levels of the reflected portion are elevated, but not at a threatening level. The operator may then move to the arrangement shown in FIG. 26B, wherein the light represented by arrow **1172** is not normal to barrier **1036**; thereby causing the reflected light represented by arrow **1174** to not be returned to sensor **1170**. However, if the irradiance levels are above a second threshold, controller **1130** sends an instruction to controller **1005** to shut laser source **1002** down. In one embodiment, the first threshold is about $2.0 \text{ mW}/\text{cm}^2$ and second threshold is about $2.5 \text{ mW}/\text{cm}^2$.

This control sequence is represented in FIG. 27. The irradiance level of the reflected portion is monitored with sensor **1170**, as represented by block **1180**. The irradiance level is compared to a first threshold, as represented by block **1182**. If the irradiance level is below the first threshold, no action is taken and the irradiance level of the reflected portion is continued to be monitored with sensor **1170**. If the irradiance level is at or above the first threshold, then the irradiance level is compared to a second threshold, as represented by block **1184**. If the irradiance level is not at or above the second threshold, then an alarm is sounded, as represented by block **1186**. This informs the operator that irradiance levels are elevated and that action should be taken, such as changing the angle of incidence relative to barrier **1036**. Exemplary alarms

include audio alarms (such as speakers), visual alarms (such as lights), tactile alarms (such as vibrating members), or combinations thereof. If the irradiance level is at or above the second threshold, then laser source **1002** is deactivated, as represented by block **1188**.

Returning to FIG. 25, laser directing device **1008** further includes a safety switch **1201** and a laser power setting switch **1202**. Safety switch **1201** provides a safety in case the operator inadvertently pulls trigger **1160**. Safety switch **1201** may be a toggle switch, a dial, or any other suitable input device. Laser power setting switch **1202** provides an indication of the desired power level of laser source **1002**. By running laser source **1002** at lower power levels for applications not requiring high power settings, the charge life of power supply **1004** may be extended. Laser power setting switch **1202** may be any type of input devices which provides multiple settings, each corresponding to a particular power level. An exemplary input device is a dial. In one embodiment, the power level of laser source **1002** may be adjusted from 0% to 700%.

Referring to FIG. 28, an exemplary operation sequence for laser directing device **1008** is provided. A request is received by controller **1130** to set the desired power level of laser source **1002**, as represented by block **1212**. For laser directing device **1008**, the request to set the desired power level of laser source **1002** is the setting of laser power setting switch **1202**. Controller **1130** sends an instruction to controller **1005** to activate laser source **1002** at the desired power level, as represented by block **1214**.

Controller **1130** receives a request to fire laser source **1002**, as represented by block **1216**. For laser directing device **1008**, the request to fire laser source **1002** is the pulling of trigger **1160** which is monitored by controller **1130**. Controller **1130** checks to see if the safety switch **1201** is off, as represented by block **1218**. For laser directing device **1008**, the state of safety switch **1201** is checked. If the safety switch is on, an alarm is provided to alert the operator that the safety is on, as represented by block **1220**. Exemplary alarms include audio alarms (such as speakers), visual alarms (such as lights), tactile alarms (such as vibrating members), or combinations thereof. If the safety switch is off, then controller **1130** sends an instruction to controller **1005** to fire laser source **1002**, as represented by block **1222**.

While laser source **1002** is being fired, the monitoring sequence of FIG. 27 is carried out, as represented by block **1224**. Controller **1130** receives a request to deactivate laser source **1002**, as represented by block **1226**. For laser directing device **1008**, the request to deactivate laser source **1002** is the release of trigger **1160** which is monitored by controller **1130**. Controller **1130** sends an instruction to controller **1005** to deactivate laser source **1002**, as represented by block **1228**.

With trigger **1160** pulled, operator **1020** moves laser directing device **1008** with his/her arms to define the cutting path of laser directing device **1008**. As such, laser directing device **1008** may be moved by human operator **1020** without the need to also move laser source **1002**. This flexibility is provided in part by the flexibility of optical conduit **1030**. As represented in FIG. 22, a planned cutting path **1062** is shown including a first portion **1064** which has already been cut. Once cutting is complete, portable cutting device **1000** may be powered off, by letting trigger **1160** released. In between cutting operations, power supply **1004** may be recharged or replaced.

Referring to FIG. 33, in one embodiment, the laser source **1002** of portable cutting device **1000** includes a laser source **920**. Laser source **920** includes a plurality of semiconductor lasers **922-626** which produce optical energy for portable cutting device **1000**. In one embodiment, the semiconductor

lasers are continuous wave lasers. In one embodiment, lasers **922-626** are quantum cascade lasers. Exemplary quantum cascade lasers include External Cavity Quantum Cascade Lasers available from Daylight Solutions located at 13029 Danielson Street, Suite 130 in Poway, Calif. and Pranalytica located at 1101 Colorado Avenue in Santa Monica, Calif. In one embodiment, the semiconductor lasers have a wavelength of at least about 1 μm . In one embodiment, the semiconductor lasers have a wavelength of at least about 2 μm .

The output optical energy of each of lasers **922-626** is carried through respective optical conduits **928-632**. In one embodiment, the output of each of optical conduits **928-632** is combined and passes through optical conduit **1030** to laser directing device **1008**. In the illustrated embodiment, each of optical conduits **928-632** pass through optical conduit **1030**. In this example, the end of each of optical conduits **928-632** generally coincide with optical connector **1106**. Optical conduit **1056** then propagates the optical energy to optical system **1112** which outputs the optical energy from laser directing device **1008**. The optical energy of lasers **902-606** is generally incoherently combined to produce a beam with a power level sufficient to function in the same manner as laser source **1002**. In one embodiment, the power of the combined lasers **902-606** is about 3 kilowatts. In one embodiment, the power level of combined lasers **902-606** is about 5 kilowatts. In one embodiment, the power level of combined lasers **902-606** is about 10 kilowatts. In one embodiment, the power level of combined lasers **902-606** is about 20 kilowatts. In one embodiment, the power level of combined lasers **902-606** is about 50 kilowatts. In one embodiment, the power level of combined lasers **902-606** is between about 3 kilowatts and 20 kilowatts. In one embodiment, the power level of combined lasers **902-606** is at least 3 kilowatts.

In one embodiment, portable cutting device **1000** is mounted to a moveable platform so that portable cutting device **1000** is positionable relative to various objects to be cut or removed without having to be held by an operator. The portable cutting device may be fired at an object having a first hardness. Subsequent to firing, the hardness of the object is reduced it is believed due to the interaction of the optical energy produced by portable cutting device **1000** and the object. Once the hardness of the object has been reduced a mechanical tool may be used to remove at least portions of the object. In one example, the portable cutting device **1000** is lowered into a well shaft and fired at rock in the well shaft to reduce the hardness of the rock. Subsequent thereto, a mechanical drill is used to further breakup and remove the rock from the well shaft.

Although the disclosed systems have included laser systems with wavelengths in the infrared spectrum, the teaching presented herein may also be used with laser systems with wavelengths in the visible spectrum or ultraviolet spectrum.

While this invention has been described as having an exemplary design, the present invention may be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains.

The invention claimed is:

1. A method of hampering unauthorized electro-optic devices, the method comprising the steps of:
 - interrogating an area with optical energy from at least one optical source;
 - receiving a reflection from a first electro-optic device;

storing data representative of optically detectable characteristics for a plurality of authorized electro-optic devices;

comparing an optically detectable characteristic of the received reflection of the first electro-optic device to the stored data representative of optically detectable characteristics of authorized electro-optic devices to determine if the first electro-optic device is one of said authorized devices; and

if the first electro-optic device is not one of said authorized devices, hampering the operation of the first electro-optic device.

2. The method of claim 1, wherein the at least one optical source is at least one continuous wave laser source having a wavelength of at least 1.5 microns.

3. The method of claim 1, wherein the comparing step of includes the steps of:

determining a Fourier transform of the received reflection from the first electro-optic device; and

comparing at least a portion of the Fourier transform to the stored optically detectable characteristics to determine if the portion of the Fourier transform matches the stored optically detectable characteristics.

4. The method of claim 1, wherein the first electro-optic device is an unauthorized electro-optic device, the step of hampering the operation of the first electro-optic device includes the steps of:

increasing a power level of the optical energy from the at least one optical source;

directing the optical energy with the increased power at the first electro-optic device.

5. The method of claim 4, wherein the first electro-optic device is an infrared tracking device having a seeker head traveling in a first direction towards the at least one optical source, the optical energy with the increased power level being directed into the seeker head of the infrared tracking device to generate at least one localized source within the mobile tracking device and within a field of view of the infrared tracking device which indicates a second direction of travel for the infrared tracking device.

6. The method of claim 5, further comprising the steps of: altering the direction of the optical energy with the increased power level such that the optical energy with the increased power level continues to be directed at the seeker head of the infrared tracking device which is traveling in the second direction and continues to generate at least one localized source within the infrared tracking device and within the field of view of the infrared tracking device which indicates a third direction of travel for the infrared tracking device.

7. The method of claim 1, wherein the step of hampering the operation of the first electro-optic device includes the step of blinding the first electro-optic device with optical energy.

8. The method of claim 1, wherein the step of hampering the operation of the first electro-optic device includes the step of jamming an operation of the first electro-optic device with optical energy.

9. The method of claim 1, wherein the step of hampering the operation of the first electro-optic device includes the step of permanently disabling an operation of the first electro-optic device with optical energy.

10. The method of claim 1, wherein the step of hampering the operation of the first electro-optic device includes the step of destroying the first electro-optic device with optical energy.

11. The method of claim 1, wherein the step of hampering the operation of the first electro-optic device includes the step

of sending out high power optical energy in a direction towards the first electro-optic device and the method further comprising the steps of:

prior to sending out high power optical energy in a direction towards the first electro-optic device, broadcasting a signal which when received by an authorized electro-optic device causes the authorized electro-optic device to protect its sensors from the high power optical energy.

12. The method of claim 11, wherein the authorized electro-optic device shields its sensors from the high power optical energy.

13. An apparatus for interacting with an electro-optic device, the apparatus comprising:

- a body;
- at least one propulsion device supported by the body;
- a privacy device which monitors the environment surrounding the body for an unauthorized electro-optic device;
- a controller operatively connected to the privacy device, the controller determining a presence of the unauthorized electro-optic device in the environment surrounding the body based on information collected by the privacy device and a current location of the unauthorized electro-optic device; and

a modulation system which receives the current location of the unauthorized electro-optic device from the controller, orients a tracking system of the modulation system based on the current location of the unauthorized electro-optic device, detects the unauthorized electro-optic device, updates the location of the unauthorized electro-optic device, and directs a continuous beam of optical energy at the unauthorized electro-optic device.

14. The apparatus of claim 13, wherein the continuous beam of optical energy being produced by a plurality of semiconductor lasers whose output are combined.

15. The apparatus of claim 13, wherein the plurality of semiconductor lasers are quantum cascade lasers.

16. The apparatus of claim 13, wherein the output of each of the plurality of semiconductor lasers are incoherently combined to produce the continuous beam of optical energy.

17. The apparatus of claim 13, wherein the controller continues to update the current location of the unauthorized electro-optic device until the modulation system detects the unauthorized electro-optic device, the modulation system using the updated current location to orient the tracking system.

* * * * *